

Aquavalve 609® Thermo


Thermostatic shower valve

- Built-in valve
- Multi-directional swivel inlet elbows supplied
- Integral anti-scale mechanism
- Integral safety features
- Compatible with virtually all approved UK domestic water systems
- 3 year comprehensive manufacturer's guarantee

Fixing data


Inlets	15mm swivel elbow connectors. 150mm pipe centres. Cold right/hot left when viewed from front.
Outlets	15mm 'push fit' connector. The valve is supplied assembled with the ½" blanking plug fitted to the bottom of the valve body, enabling the outlet connector to be fitted to the top of the valve. The outlet connector and blanking plug may be reversed as required.
Pressures	0.1 bar minimum (1 metre head). 10 bar maximum (100 metre head).

Siting

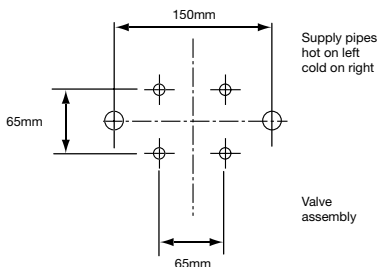

Details: fixing supply pipe centres.

Dimensions (mm)



Installation

Refer to installation guide.

Accessories

Adjustable or fixed height Varispray 3 spray pattern shower kit.
Adjustable or fixed height Turbostream 3 function shower kit (dependent on water pressure).
Aquajets and diverter (dependent on water pressure).

Booster pump options

Aquaforce 1 bar.
Aquaforce 1.5 bar.
Aquaforce 2 bar.
Aquaforce 3 bar.

Spare parts

Refer to pages 48 and 49 or spare parts guide.

Water system compatibility



Colour options



Product codes

C609.01T	Chrome
C609.21T	White/chrome
C609.20T	White
C609.04T	Gold

plumbworld
Big brands, small prices.

Pdf Supplied By <http://www.plumbworld.co.uk/>