



Bathroom Light Fittings



INSTALLATION INSTRUCTIONS

READ THESE INSTRUCTIONS BEFORE INSTALLATION

PLEASE LEAVE A COPY FOR THE USER/MAINTENANCE ENGINEER FOR FUTURE REFERENCE

GENERAL

- Aurora bathroom lights are to be connected to a 240V mains supply.
- Ensure that ALL electrical connections are tight with no loose strands.
- This fitting may be dimmed using a standard incandescent dimmer switch. Ensure that the maximum load rating of the dimmer is not exceeded. Take note of the dimmer manufacturer's de-rating advice for halogen lamps.

IMPORTANT

- Installation should be carried out by a qualified electrician and in accordance with the latest edition of the I.E.E. Wiring Regulations (BS7671) and taking into consideration Part P of the Building Regulations. If in doubt, consult a qualified electrician.
- Use only with lamp type and wattage rating as indicated on the product rating label.
- This luminaire is for indoor use only.
- Before commencing installation ensure electricity supply is switched off at the mains.
- Refer to the I.E.E Wiring Regulations BS7671:2001 Section 601 for suitability of installation in particular zones of rooms containing a bath or shower. This luminaire is only suitable for installation into Zone 3 (except where water jet are likely to be used for cleaning purposes).

IMPORTANT USER INFORMATION

- Always switch off mains supply before servicing, fitting or changing the lamp.
- Replace failed lamps immediately. Allow the lamp and fitting to cool before replacing the lamp.
- Check that the correct lamp type and wattage is fitted as indicated on the rating label.
- Replace any cracked protective shield.

INSTALLATION

1. Remove the cover fixing screws / nuts.
2. Fix the mounting bracket / base of luminaire to the wall with the screws / wall plugs provided. Beware of joists, water pipes and electric cables when drilling holes.
3. Connect the mains supply cable to the terminal block as follows. Ensure that there are no exposed conductors or trapped insulation. Conductor size 1 - 1.5mm². Connections should be tight with no loose strands.

SWITCHED LIVE - (red or brown) to terminal marked L.

NEUTRAL - (black or blue) to terminal marked N.

EARTH - (green/yellow) to terminal marked E or 

These fittings must be earthed.



Please note: If your light fitting is not at the end of a wiring 'spur' there will be a pair of live 'through' wires in your supply wiring which are coloured either red or black. These should be connected together using an additional terminal block as shown overleaf. If in any doubt, consult a qualified electrician.

4. Replace the cover ensuring that cables are not trapped between the cover and the wall / mounting bracket.
5. Insert the lamp into the lampholder. Ensure that the lamp is correctly located in the lampholder. Switch on the power supply.

Corner Mounting

This luminaire may be wall mounted horizontally or vertically and also corner mounted using a corner mounting bracket available separately. See figure 1.

GUARANTEE

This product is guaranteed in the UK for a period of 1 year from the date of purchase. The guarantee is invalid in the case of improper use, installation or tampering. Should this product fail during the guarantee period it will be replaced free of charge, subject to correct installation and return of the faulty unit. Aurora does not accept responsibility for any installation costs associated with the replacement of this product. Your statutory rights are not affected. Aurora reserve the right to alter specifications without prior notice.





Figure 1

Luminaire	Corner Mounting Bracket
AU-BLL822	AU-BLA01
AU-BLL823	AU-BLA02

This luminaire is only suitable for installation in Zone 3 (except where water jets are likely to be used for cleaning purposes).

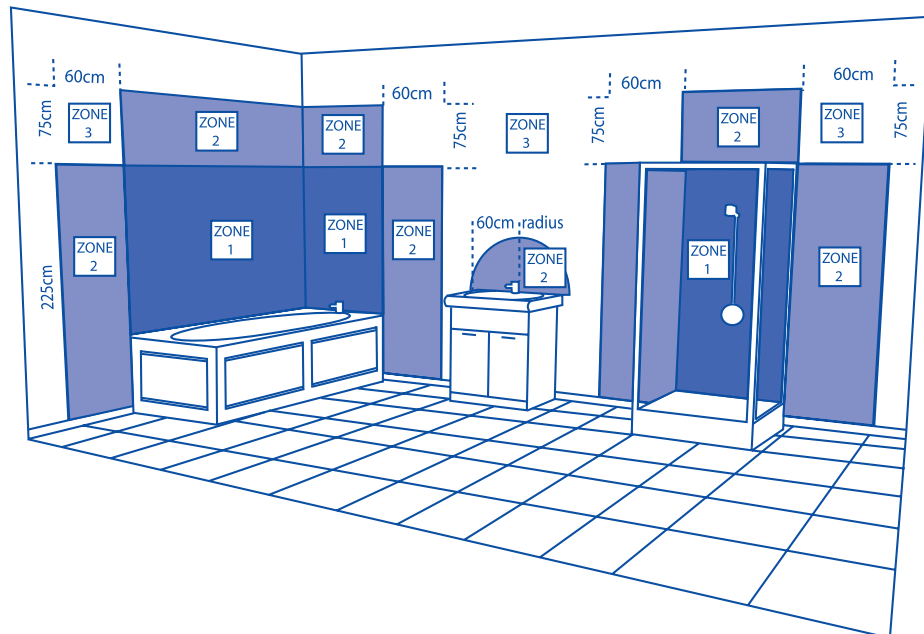

plumbworld
Big brands, small prices.

Pdf Supplied By <http://www.plumbworld.co.uk/>