


Basin, Bath & Sink Taps

Installation & Aftercare

It is recommended that work be carried out by and advice obtained from a qualified plumber

REMOVING YOUR OLD TAPS

1. Turn off water supply before commencing work, this should be done at the service valves if fitted or at the stopcock, usually located beneath the kitchen sink, then drain the pipe work by turning on the taps .
2. Once drained disconnect the water supply pipe from the tap, using a spanner.
3. Then unscrew the back nut using a spanner, once disconnected, remove tap from unit.

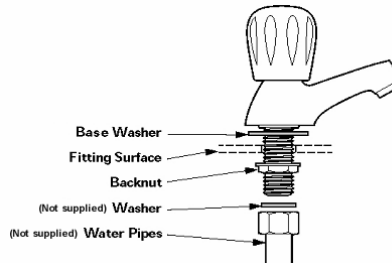

The product must be fitted in compliance with the Water Bylaw Regulations.

FITTING NEW TAPS (sealant may be used during installation)

1. Before installation flush out pipes to remove any debris as this can affect the valve-seating washer, ensure to turn off water supply following flushing of pipes and prior to installation.
2. If a base ring is included in your tap (not all ranges) place this over the tap tail, then place the base washer over the tail, so that this sits between the base ring and the surface, if no base ring is included, simply place the base washer over the tap tail.
3. Then place the tap through the tap hole, ensuring to fit the cold tap to the cold supply, which should be to the right.
4. Hold the tap in position and screw on the back nut, tighten using a spanner, but do not over tighten as this may damage the unit.
5. Depending on the connection method, washer and nut or compression nut and olive, connect the water pipe and nut to the tap tail and tighten using a spanner (see points 6 & 7).
6. If nut and olive, place the nut over the pipe and then the olive, insert pipe into tap tail and connect nut, tighten until secure.
7. If nut and washer, place the washer inside the nut and connect the nut to the tap tail and secure (Do not use the old washer if it is damaged or in poor condition).
8. When fully tightened, turn on water supply and check for leaks.

THIS PRODUCT MUST BE USED IN SUCH A WAY AS TO ENSURE ANY WATER FLOW IS DIRECTED TOWARD A SUITABLE LOCATION AND CANNOT CAUSE WATER DAMAGE.

AFTERCARE

Whilst modern plating techniques are used in the manufacture of this product, the surface will be affected if cleaned incorrectly.

Surfaces should be maintained using a clean damp cloth, no abrasive agents or materials should be used or come into contact with the surface finish, or this will invalidate your guarantee.

plumbworld

plumbworld
Big brands, small prices.

Pdf Supplied By <http://www.plumbworld.co.uk/>