

Deck Bath Mixer


Installation & Aftercare

It is recommended that work be carried out by and advice obtained from a qualified plumber

Note: Inlet pressures should be equal for optimum use, unequal pressures will affect the performance of the product

REMOVING OLD MIXER

1. Turn off water supply before commencing work, this should be done at the service valves if fitted or at the stopcock, usually located beneath the kitchen sink, then drain the pipe work.
2. Disconnect the water supply pipes from the mixer, using a spanner.
3. Then unscrew the back nuts using a spanner, once disconnected, remove mixer from unit.

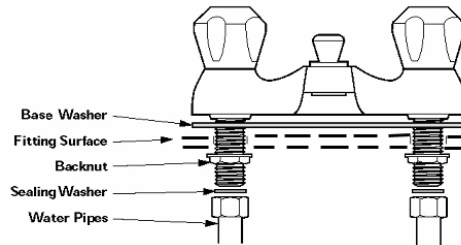

The product must be fitted in compliance with the Water Bylaw Regulations.

FITTING NEW MIXER (sealant can be used during installation)

1. Before installation flush out pipes to remove any debris as this can affect the valve-seating washer, ensure to turn off Water supply following flushing of pipes and prior to installation.
2. If not already fitted, place the base washer over the tap tails, to seal between mixer and bath.
3. Place the mixer onto the bath, inserting tails through bath holes.
4. Screw on the back nuts, tighten using a spanner, but do not over tighten as this may damage the unit.
5. Connect the water pipe and nut to the tap tail and tighten using a spanner, if using a washer do not use the old washer if it is damaged or in poor condition.
6. If supplied with a wall bracket, this should be located in the desired position, ensuring that the hose is able to reach the bracket without being under tension, then secure bracket using the plug and screw provided.
7. Next insert rubber washers into hose ends, if not already fitted, then connect hose to handset and mixer outlet and tighten to create a good seal.
8. When fully tightened, turn on water supply and check for leaks.

THIS PRODUCT MUST BE USED IN SUCH A WAY AS TO ENSURE ANY WATER FLOW IS DIRECTED TOWARD A SUITABLE LOCATION AND CANNOT CAUSE WATER DAMAGE.

AFTERCARE

Whilst modern plating techniques are used in the manufacture of this product, the surface will be affected if cleaned incorrectly.

Surfaces should be maintained using a clean damp cloth, no abrasive agents or materials should be used or come into contact with the surface finish, or this will invalidate your guarantee.

plumbworld

plumbworld
Big brands, small prices.

Pdf Supplied By <http://www.plumbworld.co.uk/>