


Deck Sink Mixer

Installation & Aftercare

It is recommended that work be carried out by and advice obtained from a qualified plumber

REMOVING OLD MIXER

1. Turn off water supply before commencing work, this should be done at the service valves if fitted or at the stopcock, usually located beneath the kitchen sink, then drain the pipe work.
2. Disconnect the water supply pipes from the mixer, using a spanner.
3. Then unscrew the back nuts using a spanner, once disconnected, remove mixer from unit.

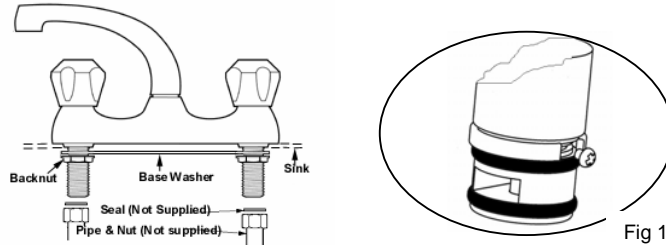

The product must be fitted in compliance with the Water Bylaw Regulations.

FITTING NEW MIXER (sealant can be used during installation)

1. Before installation flush out pipes to remove any debris as this can affect the valve-seating washer, ensure to turn off water supply following flushing of pipes and prior to installation.
2. Before fitting to the sink install the spout, if not already fitted, do this by removing the screw to rear of mixer, insert spout so that the gap in the plastic collar is located where the screw will enter the mixer, do not tighten the screw onto the plastic collar, fit screw and tighten (see above Fig 1).
3. If not already fitted, place the base washer over the tap tails.
4. Then place the tap through the tap hole, ensuring to fit the cold tap to the cold supply, which should be to the right, with the screw to the rear.
5. Screw on the back nuts, tighten using a spanner, but do not over tighten as this may damage the unit.
6. Depending on the connection method, washer and nut or compression nut and olive, connect the water pipe and nut to the tap tail and tighten using a spanner (see points 7 & 8).
7. If nut and olive, place the nut over the pipe and then the olive, insert pipe into tap tail and connect nut, tighten until secure.
8. If nut and washer, place the washer inside the nut and connect the nut to the tap tail and secure (Do not use the Old washer if it is damaged or in poor condition).
9. When fully tightened, turn on water supply and check for leaks.

THIS PRODUCT MUST BE USED IN SUCH A WAY AS TO ENSURE ANY WATER FLOW IS DIRECTED TOWARD A SUITABLE LOCATION AND CANNOT CAUSE WATER DAMAGE.

AFTERCARE

After a period of time if the spout turning becomes difficult, first turn off water supply, remove the spout by unscrewing the grub screw to the rear, Pull out the spout and clean away any debris or lime scale, which may have built up during use, using warm soapy water. When cleaned apply grease to the inside of the mixer and to the spout 'o-rings, but ensure not to block the waterways. It is recommended that a WRAS approved lubricant be used to prevent odour or taste issues with the water supply. Whilst modern plating techniques are used in the manufacture of this product, the surface will be affected if cleaned incorrectly, Surfaces should be maintained using a clean damp cloth, no abrasive agents or materials should be used or come into contact with the surface finish, or this will invalidate your guarantee.

Note: If mixer is not divided flow, inlet pressures should be equal for optimum use, unequal pressures will affect the performance of the product

plumbworld

plumbworld
Big brands, small prices.

Pdf Supplied By <http://www.plumbworld.co.uk/>