





**E.C.A.**<sup>®</sup>



MINIMAL WALL MOUNTED  
SHOWER MIXER VALVE CON/EXP  
ECAMIN573

## Parts Supplied

Description	Illustration	Qty
Shower Mixer Valve		1
Offset Nipple		2
Cover		2
Cover		1

### **Before starting installation**

Please ensure that no parts are missing and that you are entirely happy with the finish and quality of the product. In the event of missing, damaged or faulty parts, please contact your supplier or alternatively call our customer support team on 0845 6446654

### **Pressure Range**

Minimum - 0.5 bar

Maximum - 5.0 bar

If pressure is greater than the above, the fitting of flow limiters is required.

## Wall Mounted Shower Mixer Valve Installation

This product must be fitted to 1/2" BSP female connections that have been pre installed in the wall and has 150mm length from each other.


Screw the 1/2" male-end of the offset nipples (a) into the wall over the cover plates (b), using PTFE tape to seal.

Place the washers inside the mounting nuts (d) on the offset nipples (a).

Screw the nuts (d) onto the Shower Valve (c) and tighten securely.

You can either install the shower valve under the tiles. Just mount the shower valve (c) as described above except the cover plates (b). Instead of using cover plates (b), use cover plate (e) under the body of the shower valve (c) before screwing the nuts (d).

For installation of the shower kit, please see the separate instructions included with the shower kit.

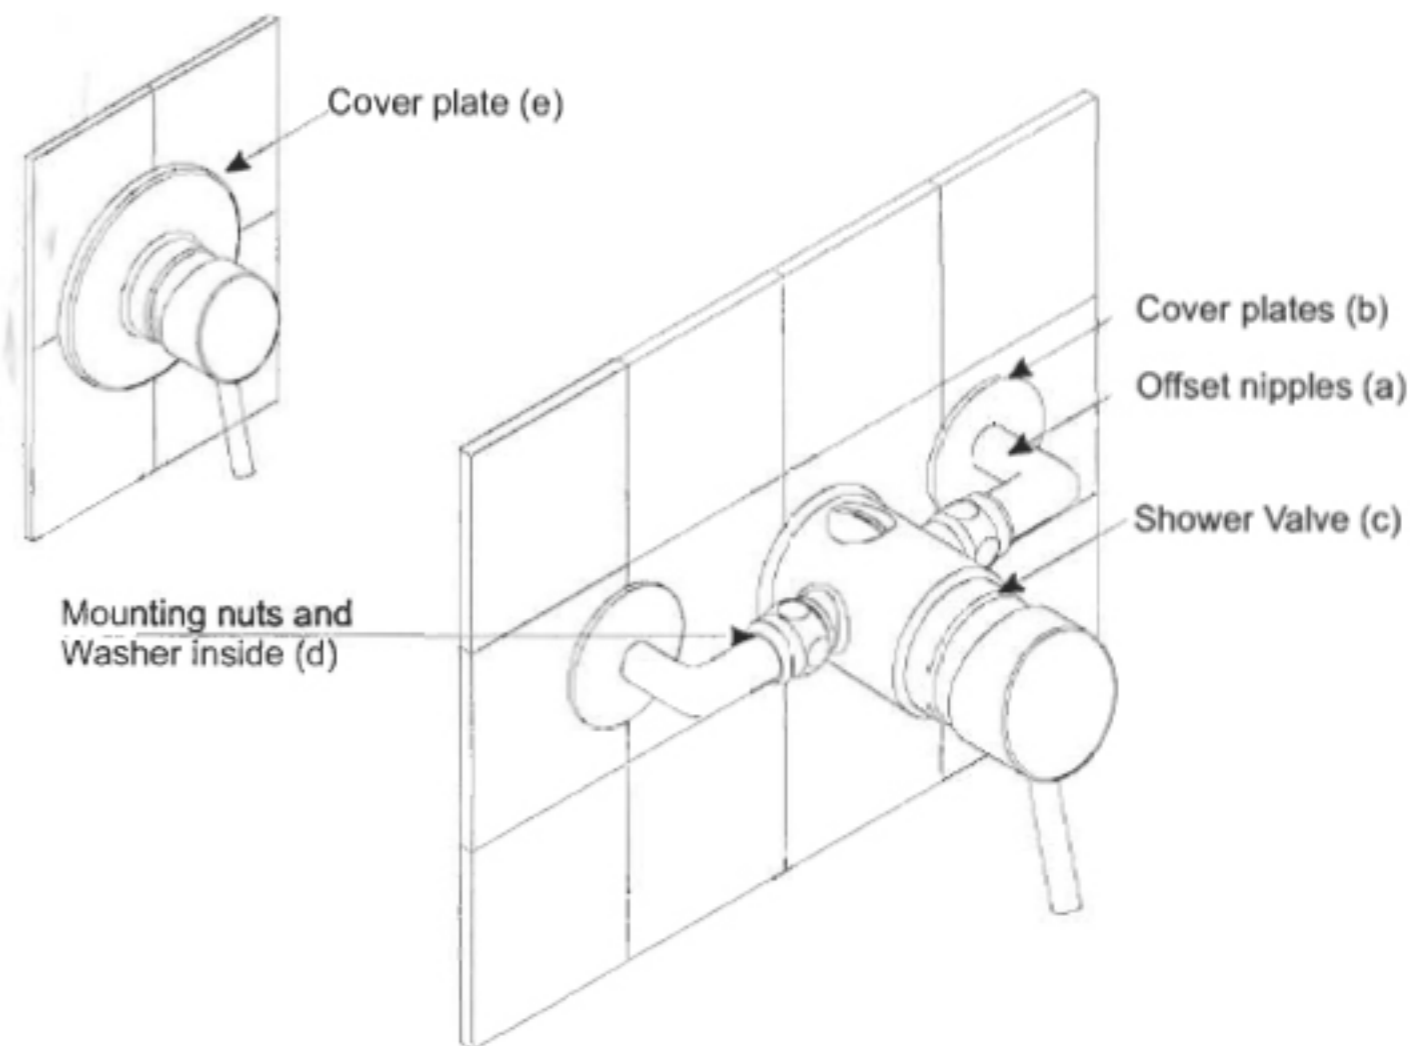

**THE USE OF ABRASIVE CLEANERS, ACID AND SOME CHEMICALS WILL HARM THE CHROME SURFACE OF THIS PRODUCT.**

**plumbworld**  
**Big brands, small prices.**

Pdf Supplied By <http://www.plumbworld.co.uk/>