

Toilet Seat Fixing Instructions

Please read these instructions before use and retain for future reference.

Contents

- 1 Toilet seat
- 2 Plastic washers
- 2 Domed washers
- 2 Rubber washers
- 2 Fixing bolts
- 2 Plastic wing nuts

Tools required

- Adjustable spanner or pliers
- Crosshead screwdriver

Safety

Never stand on the lid or ring of your toilet seat – for example when decorating the bathroom.
Check regularly to ensure that the nuts are still tight.

Assembly & Fixing Instructions



1. Before fitting the toilet seat, the hinges will need to be adjusted to fit the toilet bowl.
2. Loosen the locking screw shown in Fig.1. This will allow the hinge plates to be rotated and adjust the distance between the fixing bolts.
3. Insert the fixing bolts into the central threaded hole and LOOSELY tighten.
4. Place the seat onto the toilet bowl ensuring that the fixing bolts pass through the holes at the back of the bowl.
5. Rotate the hinge plates until the toilet seat is central on the toilet bowl.
6. If the fixing bolts are still too close together for the holes in toilet bowl, or the lid and seat will not stay up, then repeat steps 4 & 5 with the fixing bolts fitted in outer threaded hole.
7. Having centred the toilet seat, carefully remove it from the toilet bowl and fully tighten the locking screws and fixing bolts.
8. Place the plastic washers over the fixing bolts and reposition the seat onto the toilet bowl as before.
9. Slide the domed washers and rubber washers over fixing bolts, fit and securely tighten the wing nut.

Note

- If the wing nut is not fully tightened the toilet seat will move around on the toilet bowl.

Care Instructions

- Clean all surfaces with a damp cloth and mild soap solution. Do not scrub or use any other substance containing abrasives since these substances will scratch the surface.
- Do not use bleach or cleaning materials containing bleach.
- Failure to clean the hinges over a long period will result in the hinges discolouring. Chrome hinges can usually be restored using a metal polish.
- It is recommended the wing nuts are tightened periodically as may loosen over time from use.

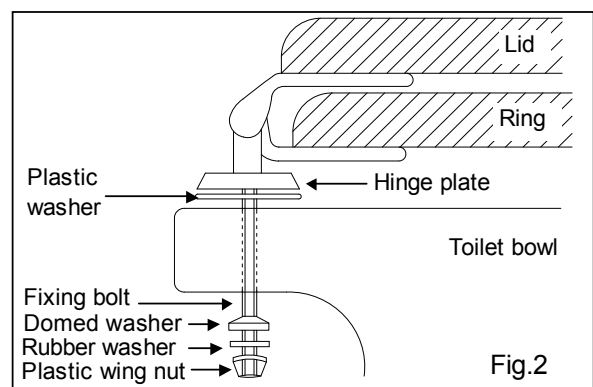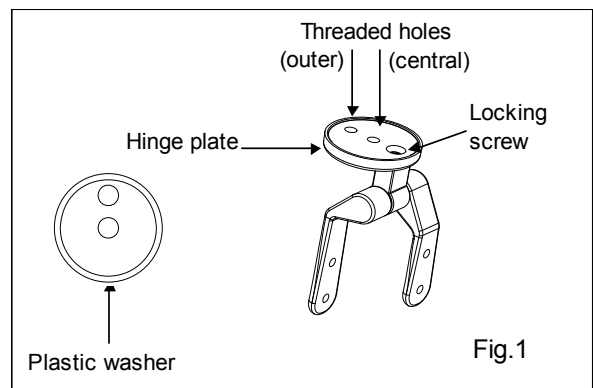

Check out our full range of Bathroom Suites

Bathroom Suites By Range

Cloakroom Suites

Toilets

Bathroom Sinks / Wash Basins

Bidets

Baths

Wide variety of toilets

Close Coupled Toilets

Wall Hung Toilets

Back To Wall Toilets

Furniture unit toilets

Huge Selection of Baths

Acrylic Baths

Steel Baths

Shower baths

Freestanding baths

Small baths

Corner baths

Whirlpool baths

Don't forget the important bathroom suite extras

Bath panels

Toilet seats

plumbworld
Big brands, small prices.