

AR2 SHXVOFF C

ARTISAN Shower Range Artisan Thermostatic Surface Mounted Bar Shower Valve & Fast Fit Connections



Features:

- Supplied with our wallmount 12 fixing kit. The simplest solution for installing, maintaining and replacing bar showers, using built in front-of-wall isolation valves
- Thermostatic cartridge with preset temperature stop at 38°C, can be over-ridden to a maximum of 46°C
- Flow control handle incorporates an eco button to save water, this can be overridden by the user
- 15mm inlet connections
- TMV2 thermostatic control for a higher level of performance and protection

Product Certifications:



WRAS Certificate No: 2005902
WRAS Expiry Date: 31/05/2025




TMV2 Certificate No: NSF2262/0720
TMV2 Expiry Date: 16/07/2025

For more products, visit our website:
<http://www.bristan.com>

Specification

Finish/Colour:	Chrome
Main Construction Material:	Brass
No of Controls:	2
Shower Type:	Bar Shower
Valve/Cartridge Type:	Thermostatic Cartridge
Maximum Hot Water Supply Temperature °C:	60
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	Suitable for all plumbing systems
Minimum Dynamic Pressure:	0.2 Bar
Maximum Dynamic Pressure:	5.0 Bar
Connection Inlet:	15mm Compression
Connection Outlet:	G1/2"
Isolation Valve Included:	Yes
Check Valve Included:	Yes

Dimensions (measurements in mm)

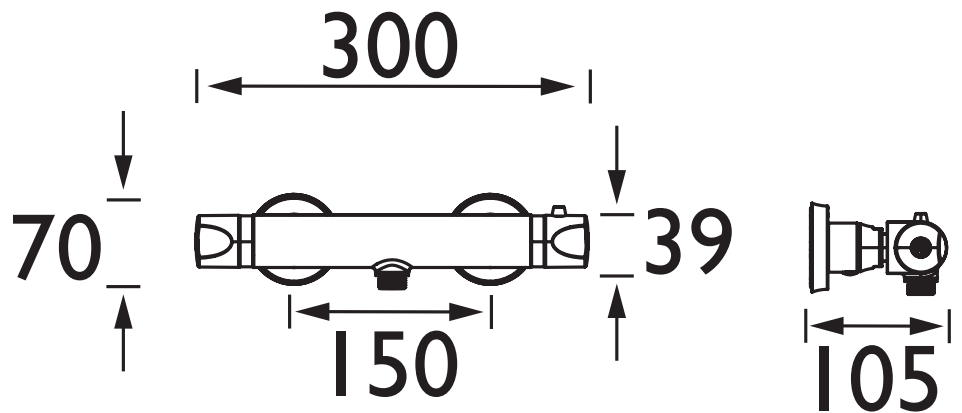

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Without Flow Regulators	5.7	10.5	15.3	22.3	27.3	35.5
With Flow Regulators	2.2	9.3	12.4	13.5	14.6	15

TECHNICAL
DATA
SHEET



BRISTAN

D11

Check out our full range of Showers

Electric Showers

Digital Showers

Mixer Showers

Power Showers

Smart Showers

Shower Towers

From Top Shower Brands

Mira Showers

Aqualisa Showers

Triton Showers

Gainsborough Showers

Shower Pumps can upgrade your showering experience even more

Stuart Turner Shower Pumps

Salamander Shower Pumps

Grundfos Shower Pumps

plumbworld
Big brands, small prices.