

Hand Shower Installation Guide

Important Installation Considerations

- NOTE: Some showers may not provide an effective shower when used with gravity fed heated water systems or where pressures are less than 150kPa at the outlet. Additionally showers with flow rates of less than 9L/min may not allow the following to function correctly:
 - some instantaneous water heaters
 - some tempering valves
 - some thermostatic mixing valves
- When water pressure is in excess of 500kPa a pressure limiting device is required.

Technical Specifications:

Operating Pressure:

Min: 150kPa/1.5bar
 Max: 500kPa/5.0bar
 Optimum: 150kPa/1.5bar - 500kPa/5bar

Recommended installation of pressure limiting valve if supply exceeds 500kPa

Operating Temperature:

Hot: Max 80°C
 Cold: Min 5°C



Inlet Connections:


All ½" BSP

NOTE:


- After installation all connections must be checked for leaks
- All installations must be carried out in compliance with relevant water regulations.

Technical Drawing

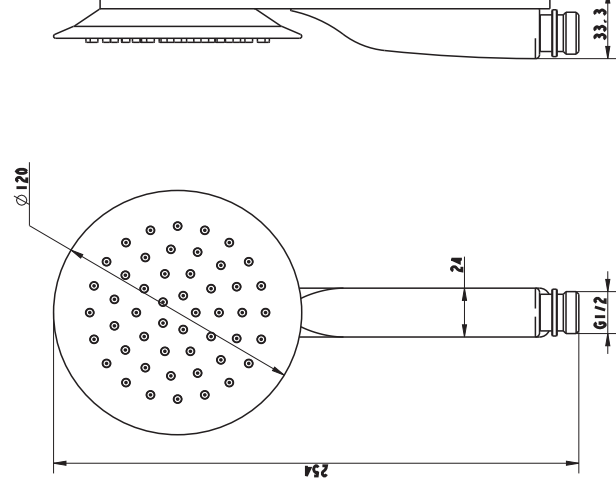

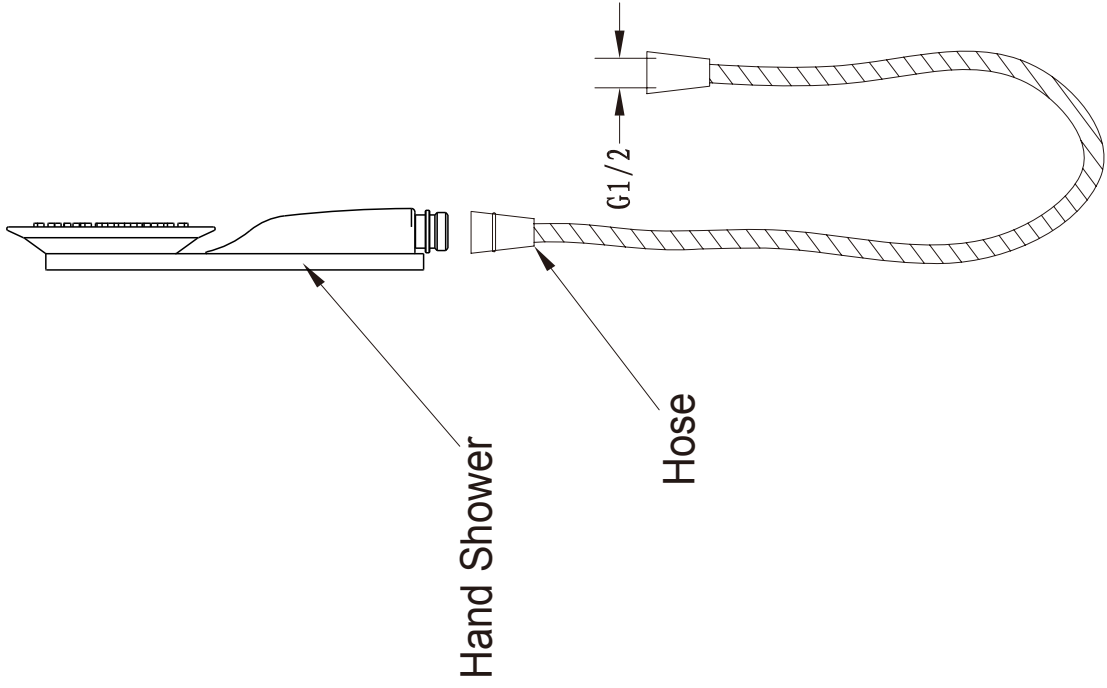

1.Prepare the parts as below picture.

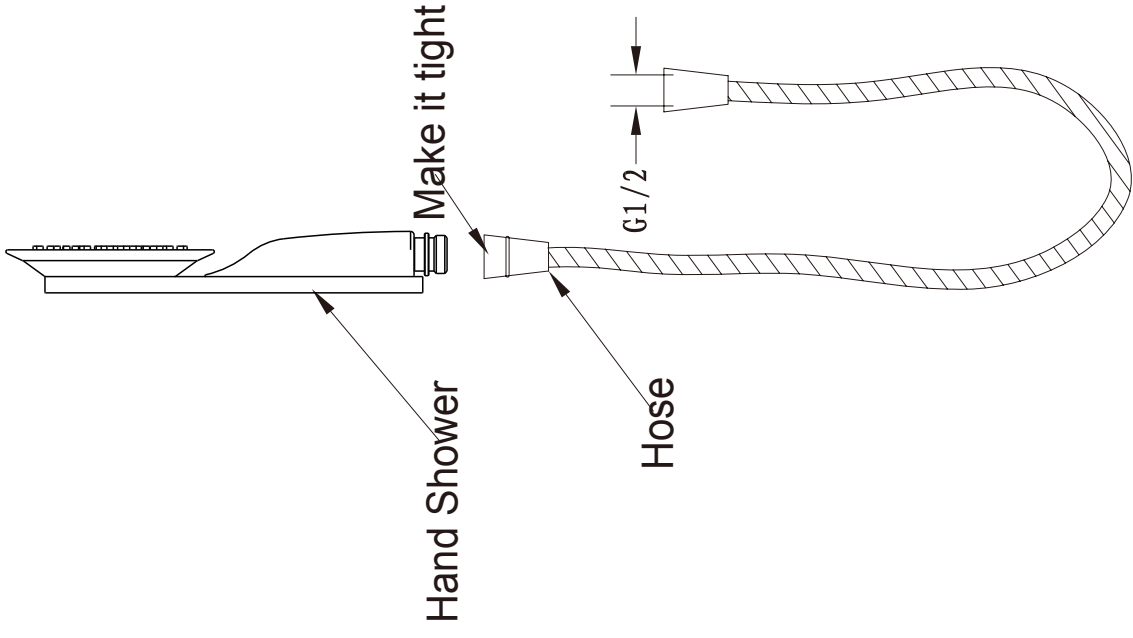

2.Connect the hand shower to the hose.