

GB ASSEMBLY INSTRUCTIONS FOR BATHROOM FURNITURE

The bathroom furniture will need to be hung on the desired wall with a distance of at least 60cm from the bath or shower enclosure (Zone 3). Recommend hanging heights of the cabinets are shown in the drawing (1).

Important: Be careful with the article during assembly and installation. Any strong mechanical influence can damaged lacquered surfaces, mirrors or electrical parts. Place the article on a clean and soft surface during the installation process. For the assembly of the bathroom cabinets, only the original fittings supplied should be used in conjunction with the article. The use of any other fittings may damage the article.

SUSPENDED CABINETS ASSEMBLY

Drilled holes will need to be made in the wall D8x45 for use with Mounted Nylon Pins. The suspension bracket can be cut using either a Hacksaw where the diamond cut-out is located. The wall bracket plates need to be fasted with 5x45 Screws. The position of the Cabinet must be adjusted accordingly ref. (2).

TOWER CABINETS ASSEMBLY

Ensure the cabinet is located in the desired place. To secure the cabinet, it will need to be fastened to the wall. Mark the fastening plate onto the wall where a hole D8x45 will need to be drilled for use with Mounted Nylon Pins. The Tower cabinet will need to be fastened with 5,0x70 screws. Use the plastic cover to complete (3).

CABINETS WITH LEGS ASSEMBLY

Subject to the type of cabinet, the legs are fastened into the marked holes underneath the cabinet with 3,5x15 screws or 6,3x15 euro screws (4).

ASSEMBLY AND SEALING OF WASHBASINS AND CABINET UNDER WASHBASIN

It is necessary to seal the upper part of the cabinet (which is in contact with the washbasin) with silicone or another water resistant sealant during assembly to protect the cabinet. Use special screws (not included in the fitting kit) for the fastening of the washbasin to the wall. It is necessary to seal with silicone or other water resistant sealant around the areas where the washbasin is in contact with the wall. After the washbasin is mounted on the cabinet, additional sealing can be done at the intersection of the cabinet and washbasin. Remove excess sealant with a soft cloth.

MIRROR DOORS WITH HANDLES

There are handles mounted on some models of the mirrors (5). Between the mirror and handle (c) it is necessary to fit a plastic spacer (b) first then fasten the handle carefully (a).

CONNECTION OF ELECTRICAL PARTS

The electrical components of the cabinets are completed and prepared to contact to a standard electrical system of ~220V-50Hz. Additional appliances to the system are not necessary. Low voltage halogen lights are fed through the transformer, inside the cabinet. The electrical parts connect the standard electrical systems ~220V-50Hz (6).

ASSEMBLING AND ADJUSTING THE HINGES

The door hinges are mounted with 3,5x15 Screws. The handing/direction for the opening of the doors can be at your discretion. Hinges to the case of the cabinet are mounted with screws B. The position of the doors must be adjusted as shown in (7).

Handles Holes need to be drilled with Drill D5.

Important: To avoid damages to the surfaces when drilling, it is necessary to a) Place a base with a hard surface on the front plane of the doors, b) Do not use high force when drilling. There are glued bumpers on the inside corners at the front. Any visible holes are covered with plastic covers.

HOW TO TAKE CARE OF YOUR BATHROOM CABINET

Everyday care: All materials used by our company can be easily cleaned. Do not use any abrasive or solvent based cleaning materials or products. Surfaces be easily cleaned with a diluted soap and water solution and moist cloth. Moistened surfaces can be cleaned with a clean, dry cloth. For the cleaning of glass surfaces, use only special, non-abrasive, cleaning materials.

Usage Conditions



Bathroom Furniture needs to be mounted in well ventilated rooms (Surrounding Temp: +5 to +35C, relative air humidity: 30-75%). Do not mount furniture flat against heat sources or equipment.

Preserve bathroom furniture from:

- Direct influence of steam to the surfaces of the furniture.
- Mechanical influence: avoid impact to the surfaces, avoid scratching surfaces with sharp objects.
- Liquid influence: wet surfaces need to be immediately cleaned with a dry cloth. Most concentrated cosmetic liquids can damage surfaces if not cleaned immediately.

Attention: Never feed low voltage reflector directly from the 220-240V mains. Always use a transformer (220-240V/12V). Use only halogen bulbs 12V-20W-G4. The space between Halogen and combustible materials should be at least 30cm. Before assembly or other activities (e.g. Cleaning) always switch off the supply. If in doubt, consult your qualified installer.

Limited Guarantee. The manufacturer of this product provides all products with a limited guarantee for two years. This guarantee is limited to the value of the product and does not cover transport, removal or installation costs for the replaced product. The warranty also does not include the damaged caused by an incorrect installation, store and usage, as well as the results of careless handling. Exposure to extreme temperatures and aggressive chemical agents, such as strong solvents, acids and lye etc.

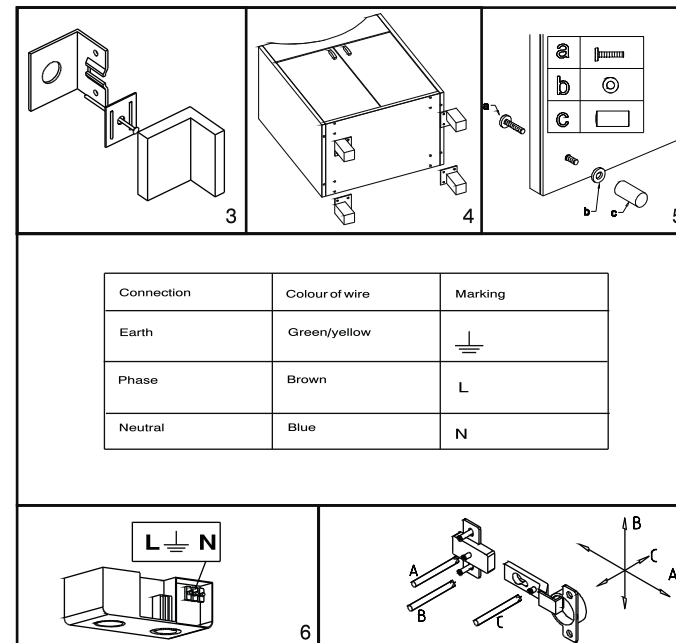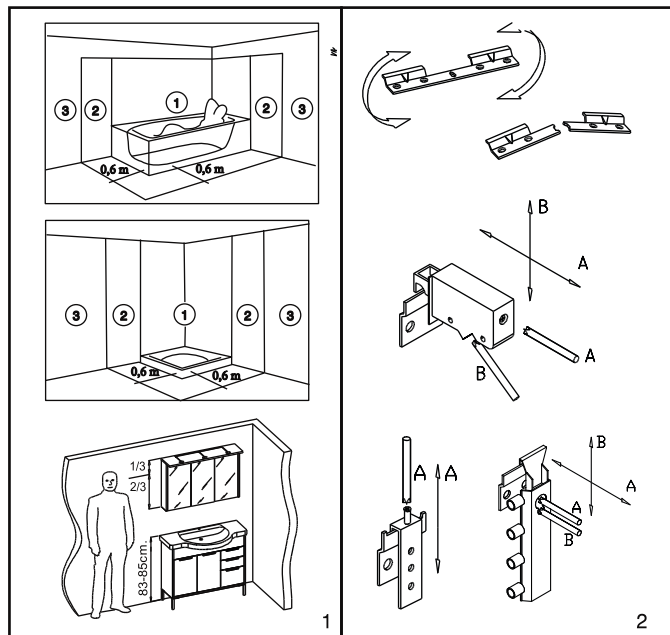

Check out our full range of Bathroom Furniture

Wide Range of Colours

White Bathroom Furniture / White Gloss Bathroom Furniture

Grey Bathroom Furniture

Black Bathroom Furniture

Walnut Bathroom Furniture

Wide Range of Styles

Bathroom Vanity Units

Bathroom Cabinets

Basin & Toilet Furniture Units

Traditional Bathroom Furniture

Bathroom Drawers

Tall Bathroom Units

Radiator Covers / Radiator Cabinets

plumbworld
Big brands, small prices.