

BRISTAN

Installation Instructions & User Guide

Please leave these instructions
with the end user

Product Code: AL 3TH BAS Range (D2)

Specification


Dynamic Water Pressure

Min: 0.5 bar Max: 5.0 bar




Maximum Static Pressure: 10.0 bar

Inlet Water Temperature




Maximum Hot: 60°C

Inlet Connections



15mm Compression


Outlet




M18.5 5lpm
Coin-Slot Aerator

Pack Contents

□ x2 Flexible Tails



□ x1 Spout Assembly
with T-Piece



□ x1
Hot Side Body
Assembly

□ x1
Cold Side Body
Assembly



Operation

Hot



Cold



Spout

Tools Required



Crosshead
Screwdriver




Box Spanner



Socket
Spanner



Hex Key



Adjustable
Spanner

Prior to Installation

All products manufactured and supplied by Bristan are safe to use provided that they are installed, operated and receive regular maintenance in accordance with these instructions.

This product needs to be installed in accordance with, and meet the requirements of The Water Supply (Water Fittings) Regulations (Northern Ireland) 2009 and The Water Supply (Water Fittings) (Scotland) Byelaws 2014.

For full Installation Requirements & Notes (IRN) please visit
www.wrasapprovals.co.uk/approvals-directory

Isolation valves must be fitted to the inlet water supplies to ensure ease of future maintenance.

Before installing this product the water supply must be thoroughly flushed in order to remove any swarf, solder etc. Full access must be made available for future maintenance/servicing purposes.

This product must not be modified in any way as this will invalidate the guarantee.


Spare Parts



To replace any spare parts
for your tap, why not scan
the QR Code or visit
www.bristan.com and
search for your product.

Installation


1

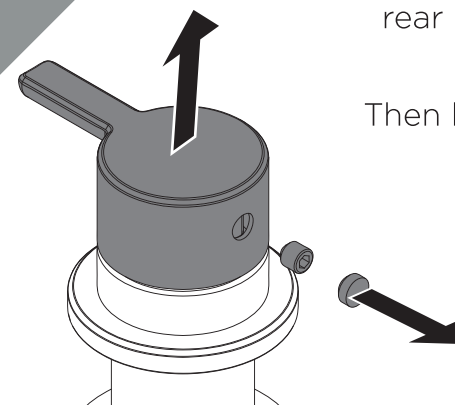

Remove the cap and
grub screw from the
rear of the handles to
free them.


Then lift them off of the
side bodies.

2

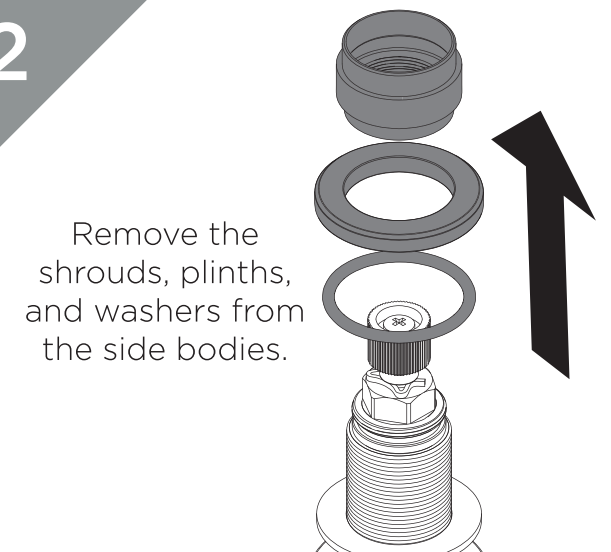

Remove the
shrouds, plinths,
and washers from
the side bodies.

3

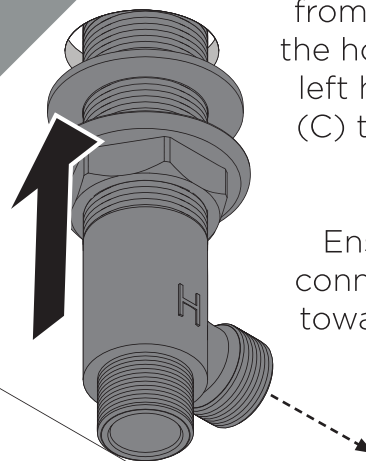


Feed the side bodies
from underneath with
the hot (H) through the
left hole and the cold (C)
through the right.

Ensure the angled
connectors are facing
towards one another.

Re-attach the shrouds, plinths and
washers from above the basin.

4

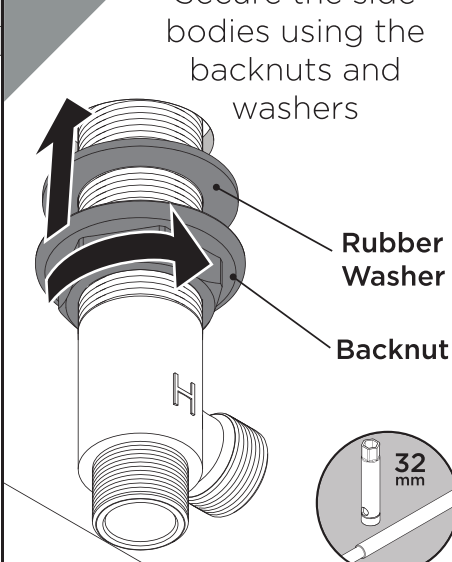


Secure the side
bodies using the
backnuts and
washers

Rubber
Washer

Backnut


32
mm

5

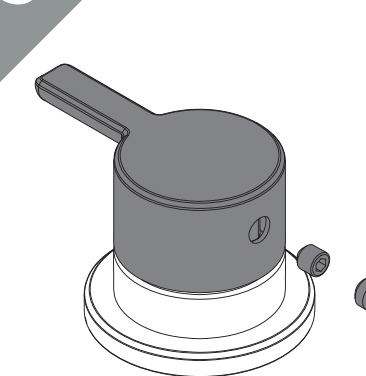


Replace the side
body handles to
secure in place.

6

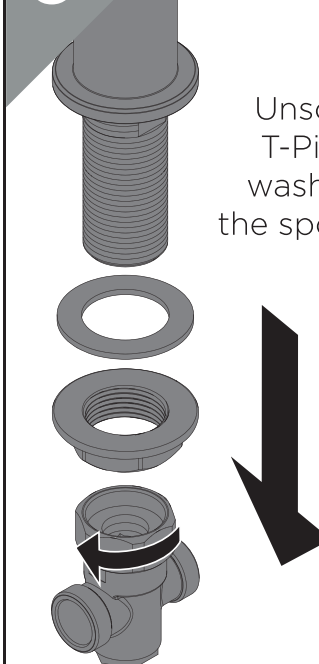


Unscrew the
T-Piece and
washers from
the spout thread.

7

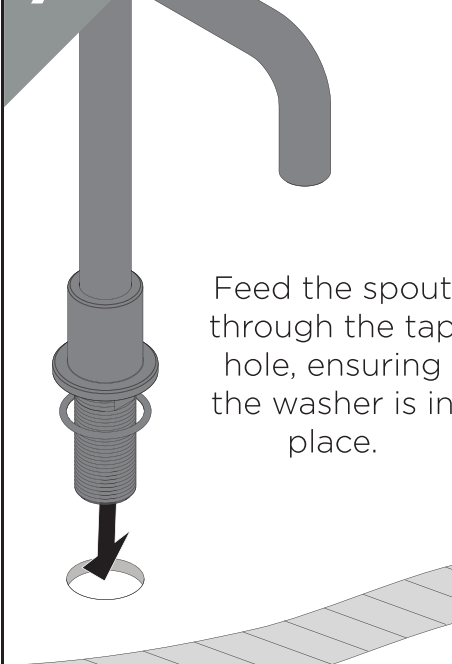

Feed the spout
through the tap
hole, ensuring
the washer is in
place.


7

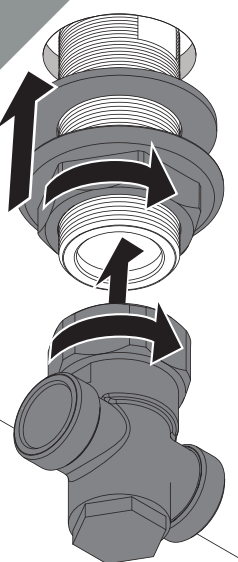

Secure the spout using the backnut and washers.

Fit the T-Piece onto the spout thread and tighten the nut the secure.


8

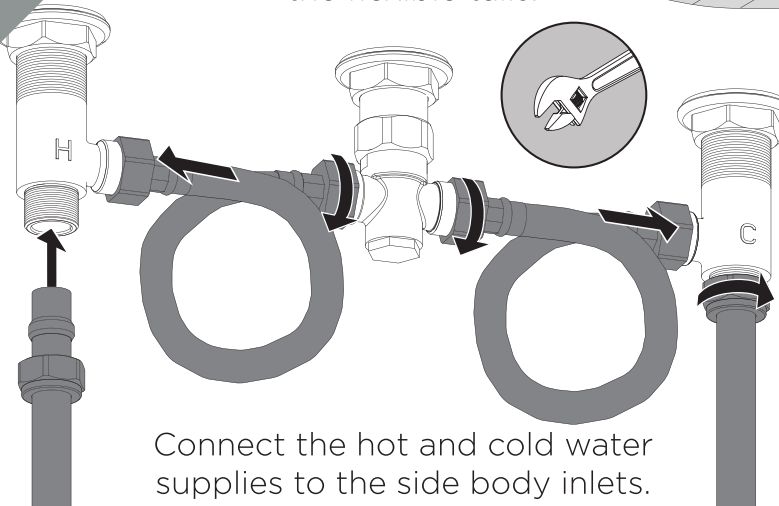

Connect the T-Piece to the side bodies by hand using the flexible tails.

Connect the hot and cold water supplies to the side body inlets.


9

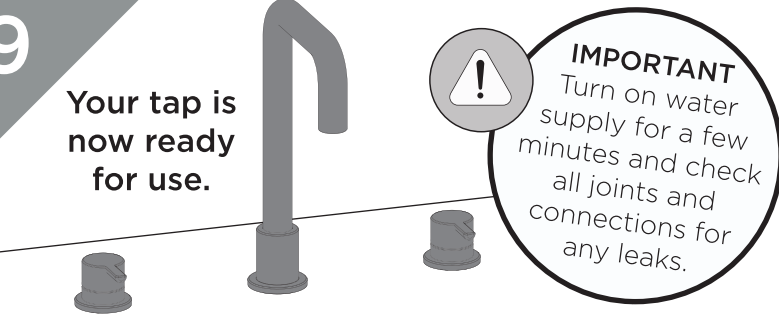


Your tap is now ready for use.

IMPORTANT
Turn on water supply for a few minutes and check all joints and connections for any leaks.

Ensure flexible tails are positioned correctly.

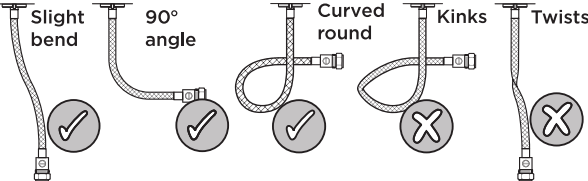

1

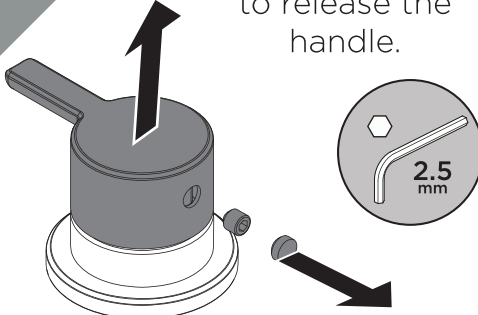


Remove the cap and grub screw to release the handle.

2



Remove the screw and spline adaptor.


3

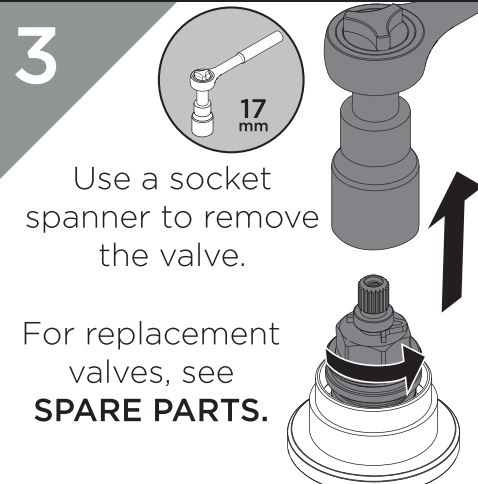

Use a socket spanner to remove the valve.

For replacement valves, see **SPARE PARTS**.

4

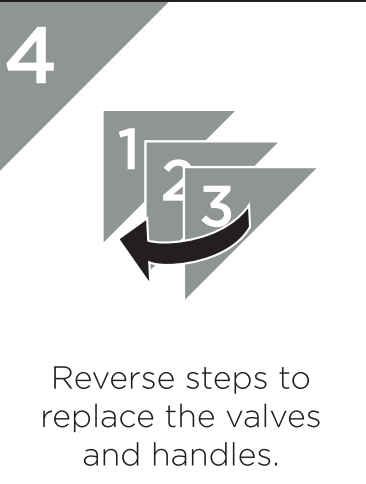

Reverse steps to replace the valves and handles.

1



Insert a coin into the slot in the outlet and twist gently to remove.

(Reverse to replace)

2



Check all loose parts for damage and then soak using a suitable solution to de-scale.

Troubleshooting		
Symptom	Cause	Remedy
Low Flow	Partially closed isolation valve.	Open isolation valve.
	Airlock or partial blockage in the supply pipework.	Flush through pipework to ensure removal of debris and any airlocks.
	Partial blockage in the outlet	Remove to Clean and soak in suitable solution.
No hot water or cycling hot and cold	Instantaneous water heater cycles on and off as flow rate or pressure is too low.	Increase water flow rate or pressure through system.
No Flow	Closed isolation valve.	Open isolation valve.
	Mains water supply turned off.	Turn on mains water supply.
Temperatures not corresponding with taps	Inlet pipes have been connected incorrectly	Swap the inlet tails around.

General Cleaning

Bristan products are made from premium materials, with hand polished, electroplated, PVD or EPD finishes.

Your taps or shower should be regularly cleaned with warm water, a mild pH-neutral liquid soap, and polished with a soft cloth. Any residues from soap, toothpaste, shampoos and shower gels can cause blemishes if not rinsed off straight after use.

Household bleaches and cleaners contain harsh chemicals and may damage the surface finish. Avoid using abrasive cloths, scouring pads, scrub sponges, steel wool or anything similar.

Contact Us



Part of **BRISTAN GROUP**

Bristan Group Ltd.
A Masco Company

UK:

Bristan Group,
Pooley Hall Drive,
Birch Coppice Business Park,
Dordon, Tamworth
B78 1SG.

EU:

Masco Europe S.à.r.l.
14 Rue Strachen
6933 Mensdorf
Luxembourg

Email Us:

enquire@bristan.com

Website:

www.bristan.com

Call Us:

+44330 026 6273

Our Guarantee

At Bristan, we want to make things as easy as possible for our customers. That's why we offer solid guarantees on all our products, effective from the date of purchase, to give you peace of mind.

Your guarantee starts from the purchase of your product, but you can still benefit from registering it for easier identification in the unlikely event of a manufacturing fault, please visit www.bristan.com/register

For any other queries, please call Customer Service on 0330 026 6273 where our expert team of advisors will be able to offer you any help and advice.

For full guarantee terms and conditions visit www.bristan.com/service-centre/guarantees

