

# FRM ES BAS GM

## FRAMMENTO Tap Range Frammento Eco Start Basin Mixer with Clicker Waste Gun Metal Grey



### Features:

- Reduce energy usage with our Eco Start technology - the tap runs cold when the lever is in the central position and only activates hot water when needed, helping cut unnecessary boiler use
- Save water without compromising performance thanks to the built-in 5L flow regulator.
- Supplied with everything you need for a hassle-free installation, including flexible tails and clicker waste
- Install with confidence using a robust metal fixing nut that keeps your tap securely in place
- Experience smooth, reliable operation thanks to the long-life ceramic cartridge

### Product Certifications:



WRAS Certificate No: 2307905  
WRAS Expiry Date: 31/07/2028




4.7 l/min

### Specification

|                                   |                                         |
|-----------------------------------|-----------------------------------------|
| Product Type:                     | Bathroom Taps                           |
| Main Construction Material:       | Brass; ABS; Stainless Steel             |
| Mount Type:                       | Deck                                    |
| Handle Type:                      | Lever                                   |
| Connection Inlet:                 | 1/2" BSP Flexible Tails                 |
| Connection Outlet:                | M24 5lpm Coin-Slot Flow Limited Aerator |
| Number of Tap Holes:              | 1                                       |
| Valve/Cartridge Type:             | 28mm Eco-Start Cartridge                |
| Plumbing System Requirements:     | Suitable for all plumbing systems       |
| Minimum Dynamic Pressure (bar):   | 0.5 bar                                 |
| Maximum Dynamic Pressure (bar):   | 5 bar                                   |
| Maximum Hot Water Temperature °C: | 65°C                                    |
| Maximum Static Pressure (bar):    | 10 bar                                  |
| Flow Type:                        | Single                                  |
| Isolation Included:               | No                                      |

### Dimensions (measurements in mm)

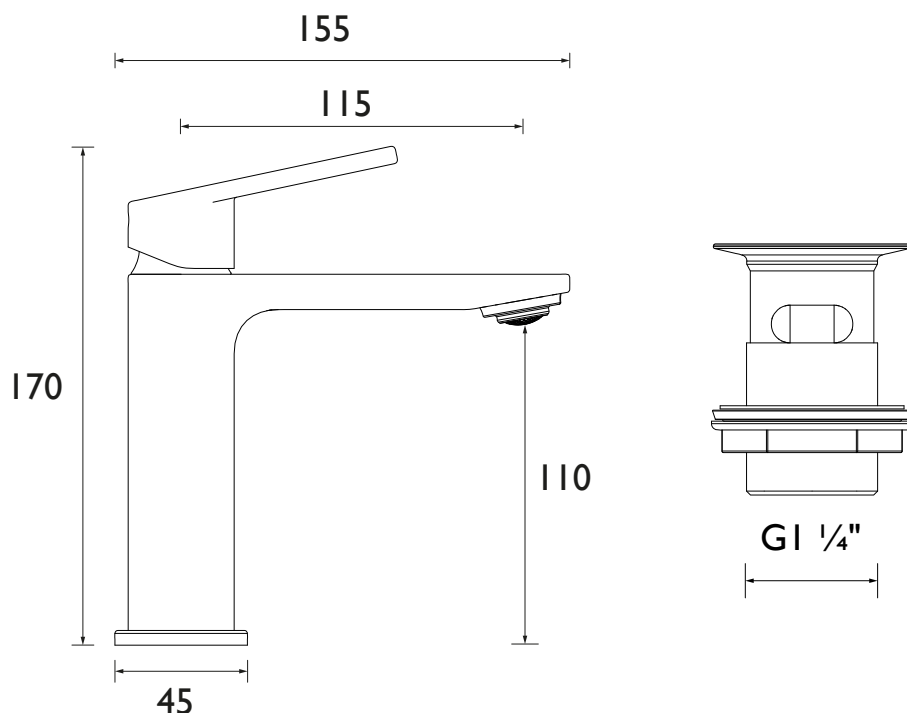

### Flow Rates (l/min)

| System Pressure (bar) | 0.5 | 1   | 2   | 3   | 5 |
|-----------------------|-----|-----|-----|-----|---|
| FRM ES BAS GM (mixed) | 2.6 | 3.7 | 4.6 | 4.7 | 5 |

# TECHNICAL DATA SHEET



# BRISTAN

D3

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: [www.bristan.com](http://www.bristan.com) Telephone: 0330 026 6273. Email: [enquire@bristan.com](mailto:enquire@bristan.com).

\* - Lifetime guarantee applies to products purchased on or after 01/04/2026. See [www.bristan.com/guarantees](http://www.bristan.com/guarantees) for more information. The information contained on this page was correct at date of issue. Listed flow rates are indicative for the product. Different plumbing systems and flow regulators can produce higher or lower results. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.