

FRAMMENTO BB SHWR PK

FRAMMENTO Shower Range Frammento Brushed Brass Concealed Dual Control Shower Pack



Features:

- Enjoy peace of mind with a 42 C safety stop, including override when required
- Shower safely with automatic shut-off protection if hot or cold water supply fails
- Enjoy a powerful, like-new shower every day?rub-clean nozzles on the drench head and handset make it easy to keep performance at its peak.
- Supplied with everything you need, including shower valve with integral two outlet diverter, slimline 200mm round drench head with shower arm, and shower kit with an adjustable riser rail, plus a rub-clean single function handset and wall outlet.
- Easy installation with an adjustable faceplate that fits total wall depths from 60mm to 75mm for a perfect flush finish.


Product Certifications:



Specification

Finish/Colour:	Brushed Brass
Main Construction Material:	Brass; ABS
No of Controls:	3
Shower Type:	Dual Control
Shower Head Type:	Both
Shower Kit:	Adjustable riser with Fixed Head
Valve/Cartridge Type:	40mm Single Lever Cartridge
Maximum Hot Water Supply Temperature °C:	65
Plumbing System Suitability:	Suitable for all plumbing systems, ideally balanced
Minimum Dynamic Pressure (bar):	0.2
Maximum Dynamic Pressure (bar):	5
Maximum Static Pressure (bar):	10
Connection Inlet:	15mm Compression
Connection Outlet:	G 1/2"
Isolation Valve Included:	No
Check Valve Included:	Yes

Dimensions (measurements in mm)

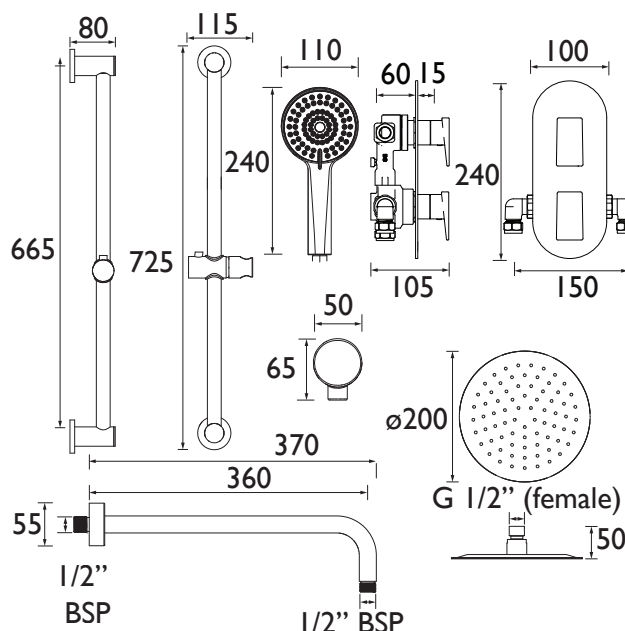

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Through Handset (without flow limiter)	2.61	4.54	7.11	10.81	13.66	NPD
Through Handset (with flow limiter)	2.61	3.82	6.61	8.01	8.56	8.85
Through Fixed Head (without flow limiters mixed)	3.15	5.89	7.97	13.17	16.82	NPD
Through Fixed Head (with flow limiters mixed)	2.64	4.81	6.94	8.21	8.42	8.84

TECHNICAL
DATA
SHEET



BRISTAN

D4

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

* - Lifetime guarantee applies to products purchased on or after 01/04/2026. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Listed flow rates are indicative for the product. Different plumbing systems and flow regulators can produce higher or lower results. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.