

MINI2 TS1203 CL C COMMERCIAL Shower Range

MINI TS1203 CL Shower Valve Chrome



Features:

- Single sequential control for both temperature and flow
- Concealed shower with easy-access cover plate for servicing
- Integral isolator and easy clean filters
- Inlet centres of 99mm +/- 1mm

Product Certifications:



WRAS Certificate No: 240403011
WRAS Expiry Date: 30/04/2029



TMV2 Certificate No: 2503305
TMV2 Expiry Date: 16/03/2030




TMV3 Certificate No: 2511711
TMV3 Expiry Date: 12/11/2030

Specification

Finish/Colour:	Chrome Plated
Main Construction Material:	Brass
No of Controls:	1
Shower Type:	Sequential Mini Valve
Shower Kit:	Valve Only
Valve/Cartridge Type:	Sequential Cartridge
Maximum Hot Water Supply Temperature °C:	60
Plumbing System Suitability:	Suitable for high pressure systems only
Minimum Dynamic Pressure (bar):	1
Maximum Dynamic Pressure (bar):	5
Maximum Static Pressure (bar):	10
Connection Inlet:	15mm Compression
Connection Outlet:	G 1/2"
Isolation Valve Included:	No
Check Valve Included:	Yes

Dimensions (measurements in mm)

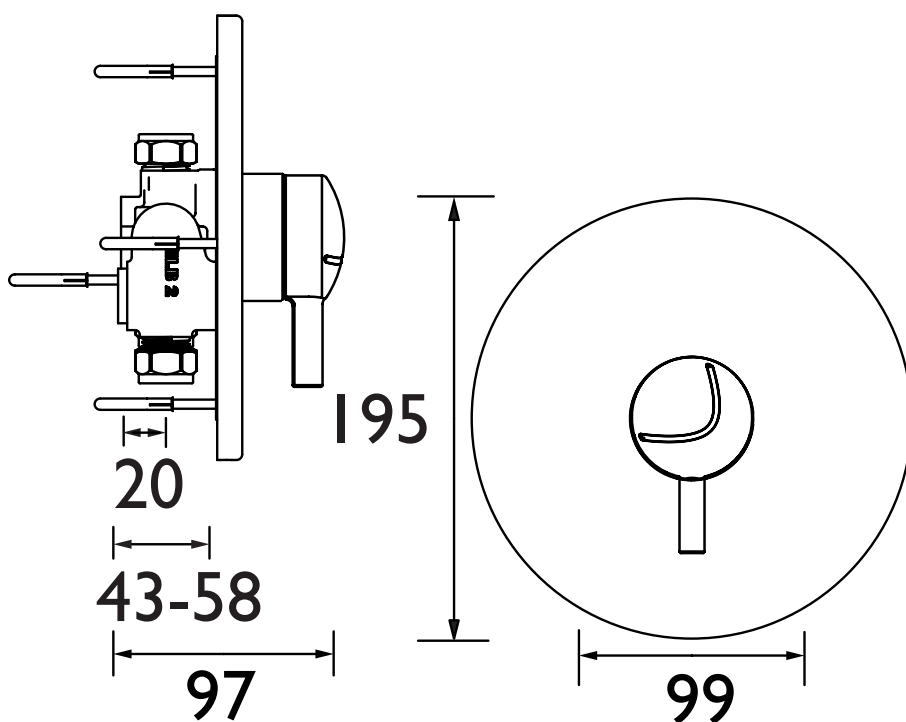

Flow Rates (l/min)

System Pressure (bar)	1	2	3	4	5
Valve Only (mixed)	7.8	8.8	9.1	9.4	9.3

TECHNICAL
DATA
SHEET



BRISTAN

D10

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

* - **Non-chrome product finishes carry a 3 year guarantee on finish.** See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Listed flow rates are indicative for the product. Different plumbing systems and flow regulators can produce higher or lower results. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.