

OP SHXVO ISOL EL C

OPAC Shower Range Opac SHXVO EL Valve Only Chrome



Features:

- Cool Touch Shower valve body for ultimate user safety
- Easy installation with self-isolating wallmount 12 fixing kit
- Integral flushing mechanism for easy maintenance
- Suitable for all systems, ideally balanced

Product Certifications:



WRAS Cert. Number: 2401900
WRAS Expiry Date: 31/01/2029



TMV2 Cert. Number: 2405562
TMV2 Expiry Date: 01/05/2029



TMV3 Cert. Number: 2405554
TMV3 Expiry Date: 01/05/2029


For more products, visit our website:
<http://www.bristan.com>



Specification

Finish/Colour:	Chrome Plated
Main Construction Material:	Brass
No of Controls:	2
Shower Type:	Bar Shower
Shower Head Type:	None
Valve/Cartridge Type:	Thermostatic Cartridge & 3/4" Ceramic Disc Valve
Maximum Hot Water Supply Temperature °C:	80
Plumbing System Suitability:	Suitable for all plumbing systems
Minimum Dynamic Pressure (bar):	0.2 bar
Maximum Dynamic Pressure (bar):	5.0 Bar
Maximum Static Pressure (bar):	10
Connection Inlet:	15mm compression
Connection Outlet:	1/2" BSP
Isolation Valve Included:	Yes
Check Valve Included:	Yes
Pre-set Outlet Temperature °C:	41

Dimensions (measurements in mm)

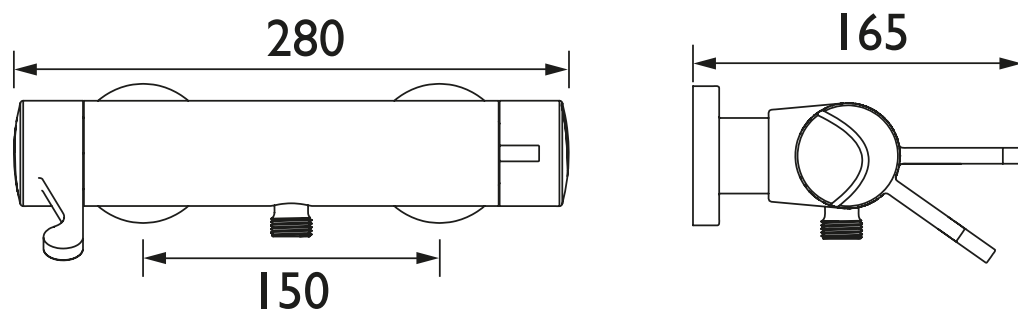

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Valve Only/Largest FR (mixed)	5.9	9.4	9.5	11.3	11.8	11.4

TECHNICAL DATA SHEET



BRISTAN

D4

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

* - Non-chrome product finishes carry a 3 year guarantee on finish. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.