


OP TS3650TO EL C

OPAC Shower Range

TS3650 Opac Lever
Rigid Riser Shower Valve

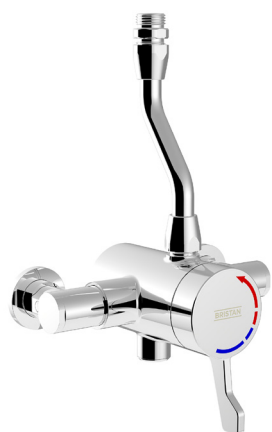

Features:

- Shower safely with automatic shut-off protection if hot or cold water supply fails
- Delivers safe, accurate temperature regulation thanks to TMV3-approved thermostatic performance
- Easy installation with adjustable inlet elbows that accommodate centres between 140mm-160mm
- Experience smooth, reliable operation with intuitive single sequential lever control for both flow and temperature
- Built-in thermal flushing system helps maintain hygiene and prevent bacterial growth

Product Certifications:



WRAS Certificate No: 250503307
WRAS Expiry Date: 31/05/2030




TMV3 Cert No: NSF2277/0720
TMV3 Expiry Date: 16/07/2026

Specification

Finish/Colour:	Chrome Plated
Main Construction Material:	Brass
No of Controls:	1
Shower Type:	Exposed
Shower Head Type:	N/A
Valve/Cartridge Type:	Sequential Cartridge
Maximum Hot Water Supply Temperature °C:	65
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	Suitable for all plumbing systems
Minimum Dynamic Pressure:	Min: 0.2 bar, Max: 5 bar
Connection Inlet:	15mm Compression
Connection Outlet:	G 1/2"
Isolation Valve Included:	Yes
Check Valve Included:	Yes

Dimensions (measurements in mm)

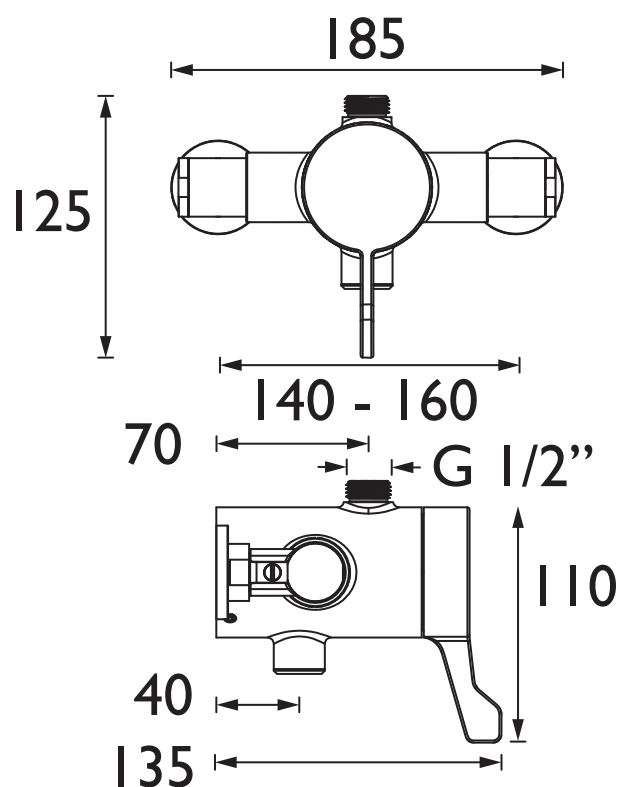

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Open Outlet (mixed)	3.9	6.3	6	7	7.5	8

TECHNICAL
DATA SHEET



BRISTAN

D6