# **SOQ2 SHXAR C**

## **SONIQUE Shower Range**

Sonique2 Thermostatic Surface Mounted Shower Valve with Adjustable Riser Chrome



#### Features:

- All in one box pack includesshower valve, hose, hose retainer, adjustable riser rail and a rub-clean anti-limescale multi function handset so nothing to buy separately
- Easy installation with adjustable elbow inlets which enable you to use on existing pipework centres between 110mm and 155mm so there's no need for retiling
- Adjustable fixing brackets on riser rail enables existing screw holes to be used
- A hard-wearing, flawless, scratch resistant chrome finish that lasts for years. Salt spray tested to ensure added durability.
- Thermostatic cartridge with preset temperature safety stop at 41°C for familysafe showering. A higher temperature can be selected, if required, by selecting the override function.

#### **Product Certifications:**






WRAS Certificate No: 240403011 WRAS Expiry Date: 30/04/2029

TMV2 Certificate No: NSF2126/0619 TMV2 Expiry Date: 13/12/2024

Water Label



Specification					
Finish/Colour:	Chrome Plated				
Main Construction Material:	Brass				
No of Controls:	1				
Shower Type:	Sequential Mini Valve				
Shower Head Type:	Single Function Handset				
Shower Kit:	Adjustable Riser				
Valve/Cartridge Type:	Thermostatic Cartridge				
Maximum Hot Water Supply Temperature °C:	65				
Plumbing System Suitability:	Suitable for all plumbing systems, ideally balanced				
Minimum Dynamic Pressure (bar):	0.1				
Maximum Dynamic Pressure (bar):	5				
Maximum Static Pressure (bar):	10				
Connection Inlet:	15mm Compression				
Connection Outlet:	G 1/2"				
Isolation Valve Included:	No				
Check Valve Included:	Yes				

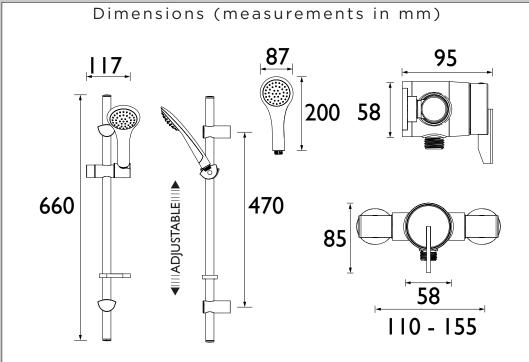

Flow Rates (I/min)							
System Pressure (bar)	0.1	0.5	1	2	3	5	
Valve Only/Largest FR (mixed)	2.1	5.4	8	12.1	15.3	21.3	
Through Handset (mixed)	2.1	5.4	8	12.1	15.3	21.3	
With Flow Limiters (mixed)	1.6	4.1	6	7.9	8.4	8.6	

### TECHNICAL DATA SHEET



