# TAN BSM BB

## TANGRAM Tap Range
### Tangram Bath Shower Mixer



## Features:

- Includes a handset that's easy to keep pristine, with rub-clean nozzles for effortless removal of limescale and debris
- Install with confidence using a robust metal fixing nut that keeps your tap securely in place
- Experience smooth, reliable operation thanks to the long-life ceramic disc valves
- Bring warmth to your space with the timeless brushed brass finish
- Built to last, backed by a lifetime parts and 1-year labour guarantee

## Product Certifications:

WRAS APPROVED PRODUCT

WRAS Certificate No: 2312358
WRAS Expiry Date: 31/12/2028

kiwa CERTIFIED KUKreg4 ATS 3


KIWA Certificate No: 2312721
KIWA Expiry Date: 12/12/2028

Unified Water Label 15.2 l/min

## Specification

| | |
|---|---|
| **Product Type:** | Bathroom Taps |
| **Main Construction Material:** | Brass |
| **Mount Type:** | Deck |
| **Handle Type:** | Lever |
| **Connection Inlet:** | 3/4" BSP |
| **Connection Outlet:** | M24 Recessed Honeycomb Aerator |
| **Number of Tap Holes:** | 2 |
| **Hose Length (mm):** | 1500 |
| **Valve/Cartridge Type:** | 3/4" Ceramic Disc Valve - 1/4 turn |
| **Plumbing System Requirements:** | Suitable for all plumbing systems |
| **Minimum Dynamic Pressure (bar):** | 0.3 bar |
| **Maximum Dynamic Pressure (bar):** | 5 bar |
| **Maximum Hot Water Temperature °C:** | 60°C |
| **Maximum Static Pressure (bar):** | 10 bar |
| **Flow Type:** | Single |
| **Isolation Included:** | No |

## Dimensions (measurements in mm)

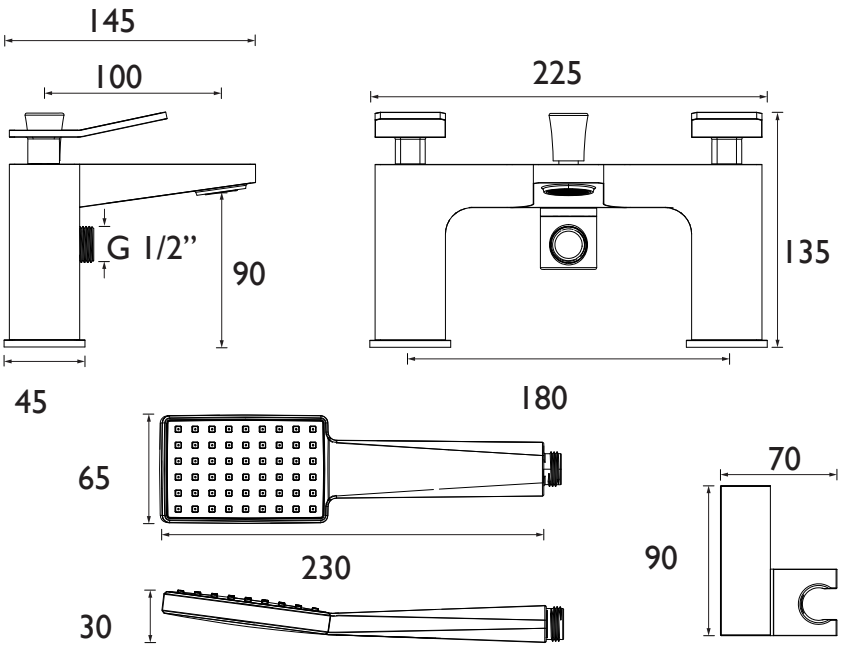


## Flow Rates (l/min)

| System Pressure (bar) | 0.3 | 0.5 | 1 | 2 | 3 | 5 |
|---|---|---|---|---|---|---|
| Through Bath Filler (mixed) | 11.3 | 15.2 | 23 | 34 | 41.9 | 54.1 |
| Through Handset (mixed) | 4 | 5.3 | 8.1 | 12 | 15.2 | 20.3 |

TECHNICAL DATA SHEET

LIFETIME GUARANTEE *

BRISTAN

D4

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

* - **Lifetime guarantee applies to products purchased on or after 01/04/2026.** See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Listed flow rates are indicative for the product. Different plumbing systems and flow regulators can produce higher or lower results. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.