



Features:

- Supplied pre-plumbed and ready for connection to a pre-blended supply
- Water economy push button operation with 25 second constant flow (+5/-10 secs)
- Vandal resistant showerhead with adjustable spray pattern rings
- 15mm inlet connection
- Max. inlet pressure 5.0 bar

Product Certifications:



WRAS Certificate No: 250403307
WRAS Expiry Date: 30/04/2030




For more products, visit our website:
<http://www.bristan.com>



Specification

Style:	Utility
Main Construction Material:	Brass
No of Controls:	1
Shower Type:	Timed Flow (25 Seconds)
Shower Head Type:	Fixed Anti-Vandal
Valve/Cartridge Type:	Manual
Maximum Hot Water Supply Temperature °C:	60 (pre-blended). 41 C Recommended for safe showering
Dynamic Pressure Range:	5
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	All Systems
Working Pressure Range:	Min. 0.2 Bar, Max. 5.0 Bar
Connection Inlet:	15mm
Connection Outlet:	Open
Check Valve Included:	No

Dimensions (measurements in mm)

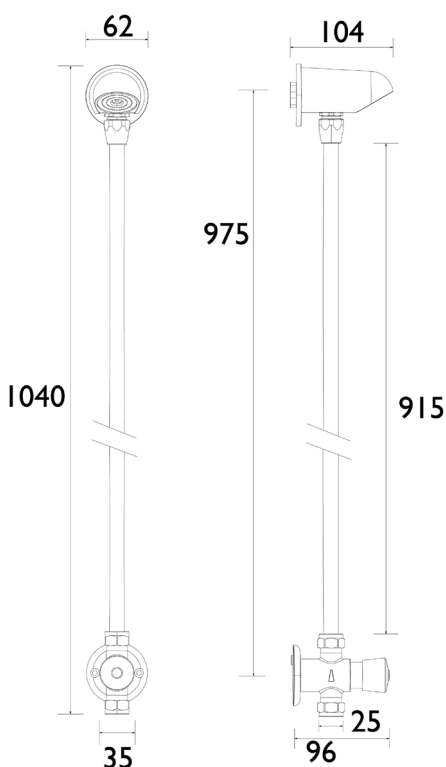

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
MEFC-PAK (with 3 Spray Rings)	4.5	7.6	11	15.5	19	24

TECHNICAL
DATA
SHEET



BRISTAN

D7