CAPLE CARE

FREE 2 YEAR
PARTS & LABOUR
GUARANTEE

CLASSIC UNDERCOUNTER
DUAL ZONE WINE CABINET

PRODUCT CODE

Wi6234

DIMENSIONS

w:595mm

PERFORMANCE

Energy class G

Noise class C

Energy consumption
142kWh/yr

Ambient temperature
16ºC - 32ºC

Temperature range
5ºC - 18ºC [both zones]

Humidity range >65%RH

Quiet operation 39dB[A]

FINISH AVAILABLE

Stainless steel

GENERAL FEATURES

- Stainless steel doors
- Shelves can accommodate
  750ml Bordeaux, Burgundy and
  Champagne bottles
- No-frost compressor cooling
  technology maintains a
  consistent temperature
- Dual side-by-side temperature
  zones, independently controlled
  [both zones suitable for either
  serving or storage]
- Touch controls and white
  LED display
- Converts into a can chiller using
  optional glass shelving [shown]
- UV/heat-free white LED lighting
  [switchable]
- Vibration free
- Adjustable height to fit
  100 - 150mm plinth
- Stainless steel square handles

- Fan circulated cool air for even
  temperature distribution
- Beech shelves
- 5 Sliding shelves and
  1 base shelf per zone
- 100% CFC/HFC free
- Toughened UV protected
  glass door
- 2 Humidity control water tanks
- Black cabinet interior and exterior
- Recessed for fitting
  furniture plinth
- Air ventilation through
  plinth grille
- Supplied with both stainless steel
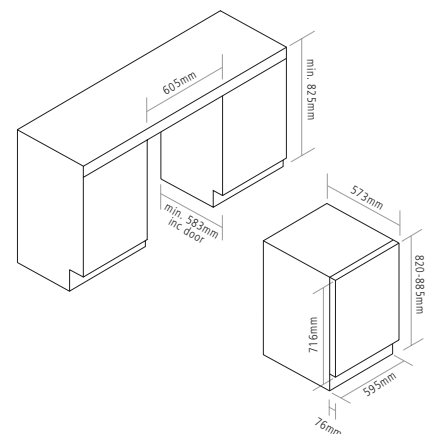 universal plinth grille w:525mm
  and full width grille

CAPACITY

- 4.20 Cu ft/119 Litre
  total net capacity
- 4.73 Cu ft/134 Litre
  total gross capacity
- Stores max. 38 Bordeaux
  style wine bottles 750ml
  [19 bottles per zone]
  Bottle stacking diagrams
  available at caple.co.uk

OPTIONAL EXTRAS

- 6 Wine labels and holders
  [WINELABEL]
- 3 Frosted glass shelves with black
  plastic trim [GSHELFPACK/300]
  Visit caple.co.uk for full range

DIMENSIONS

Features

CHAMPAGNE SHELVES

The easy-slide beech shelves are non-scratch so they won't damage bottle
labels. If Champagne is your drink of choice, the slatted design allows you to
store larger bottles so you're prepared for any special occasion.

605mm

min. 825mm

min. 583mm
inc door

573mm

820-885mm

716mm

595mm

76mm