



INSTALLATION MANUAL
















Eastbrook 

Eastbrook Road, Gloucester GL4 3DB



Technical Helpline: 01452 317890

email: technical@eastbrookco.com

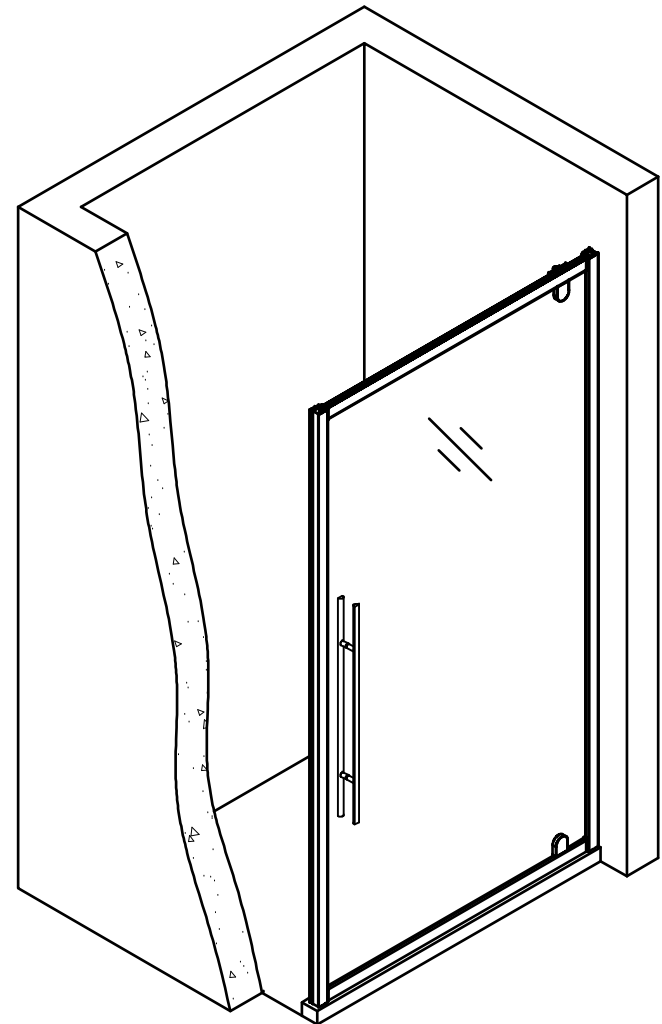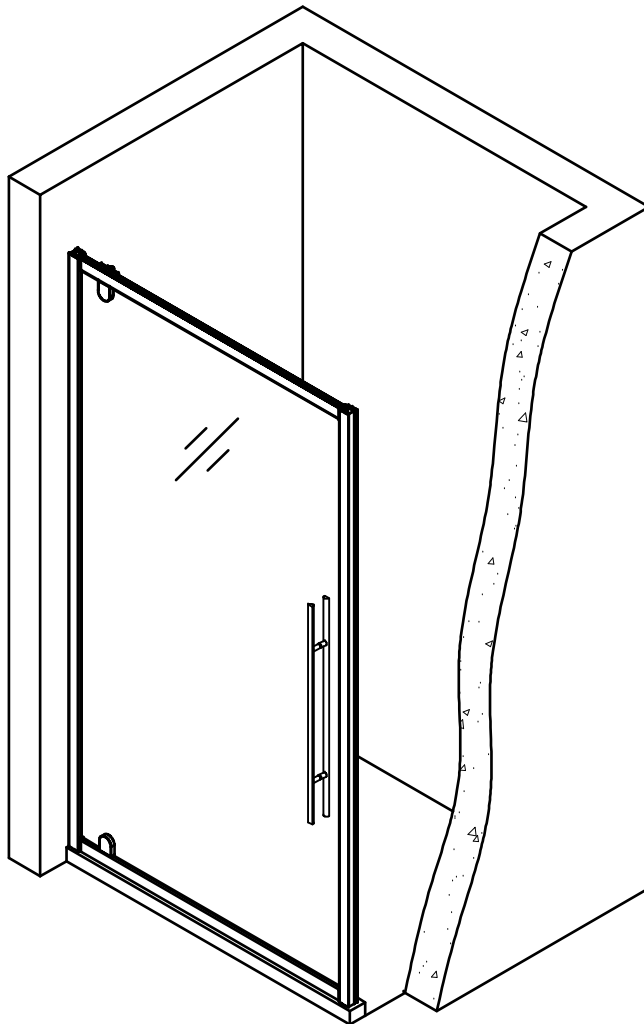


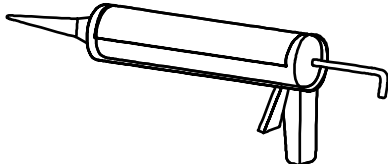1  D6x30 8Pcs	2  ST4X30 8Pcs	3  ST4X12 8Pcs	4  RF-6Y01 8Pcs	5  RF-6W01 2Pcs
6  RF-6Z06 1Pc 1905mm	7  RF-6Z07 1Pc 1928mm	8  RF-6X04 1Pc	9  RF-6X04 1Pc	10  RF-6Z05 2Pcs
20  RF-6C1 2Pcs	21  RF-6Y12 2Pcs	22  RF-6Y13 2Pcs	Tools:	
 2 mm  Ø6mm  Ø3.2mm 				


1

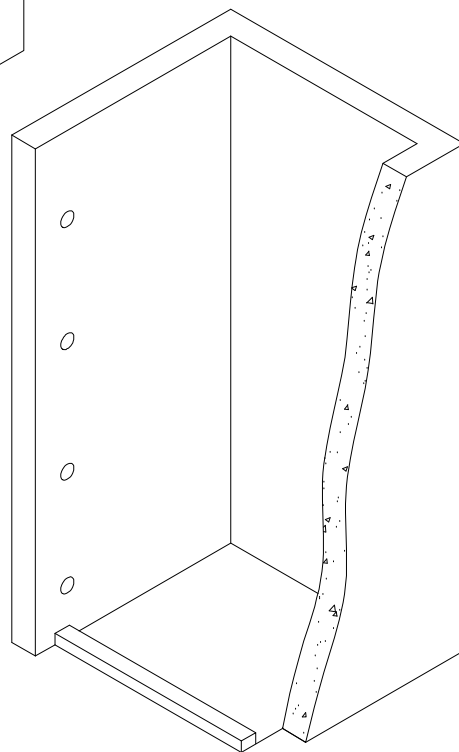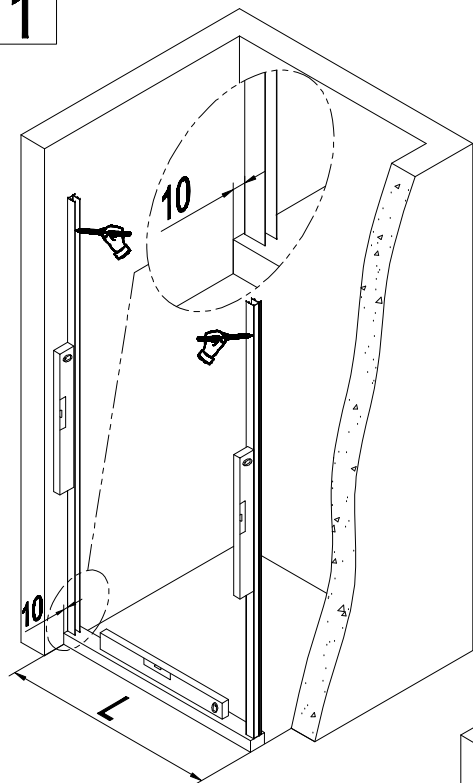

1-1





1-2




1-3




1

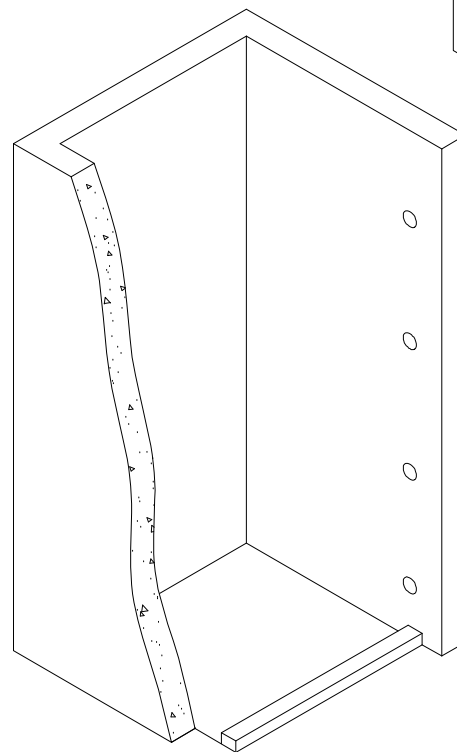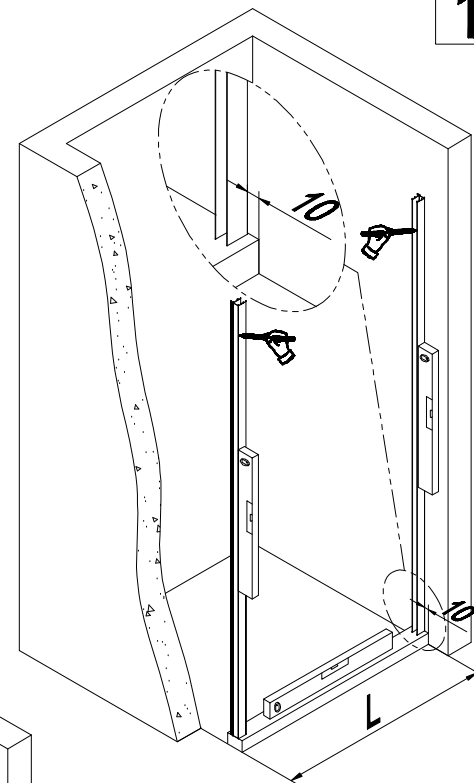

1-1





Ø6x30mm




1-3



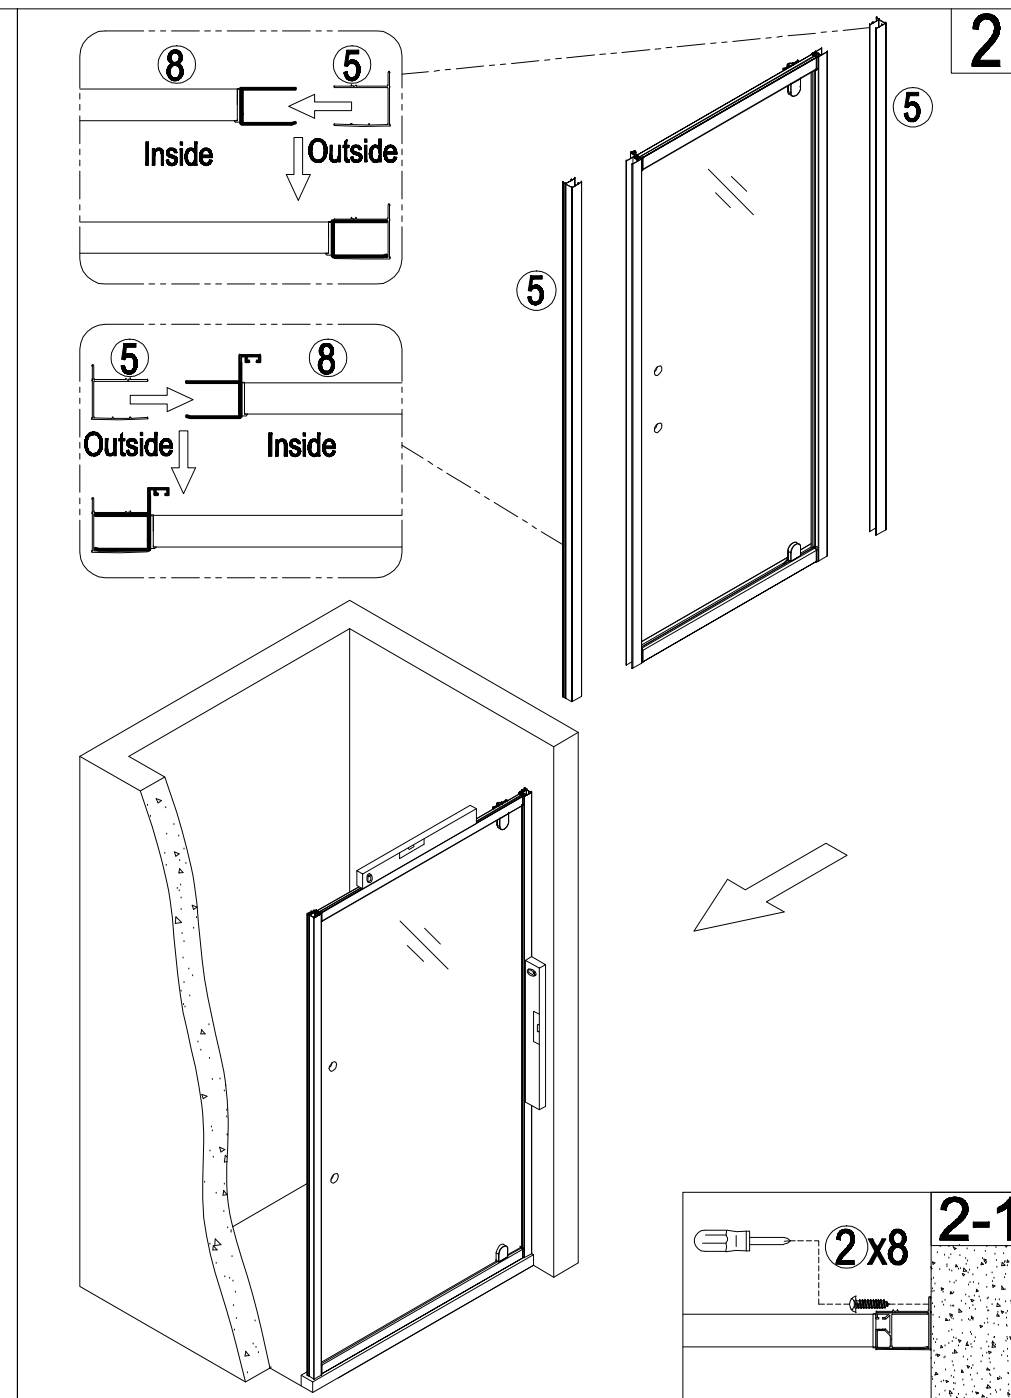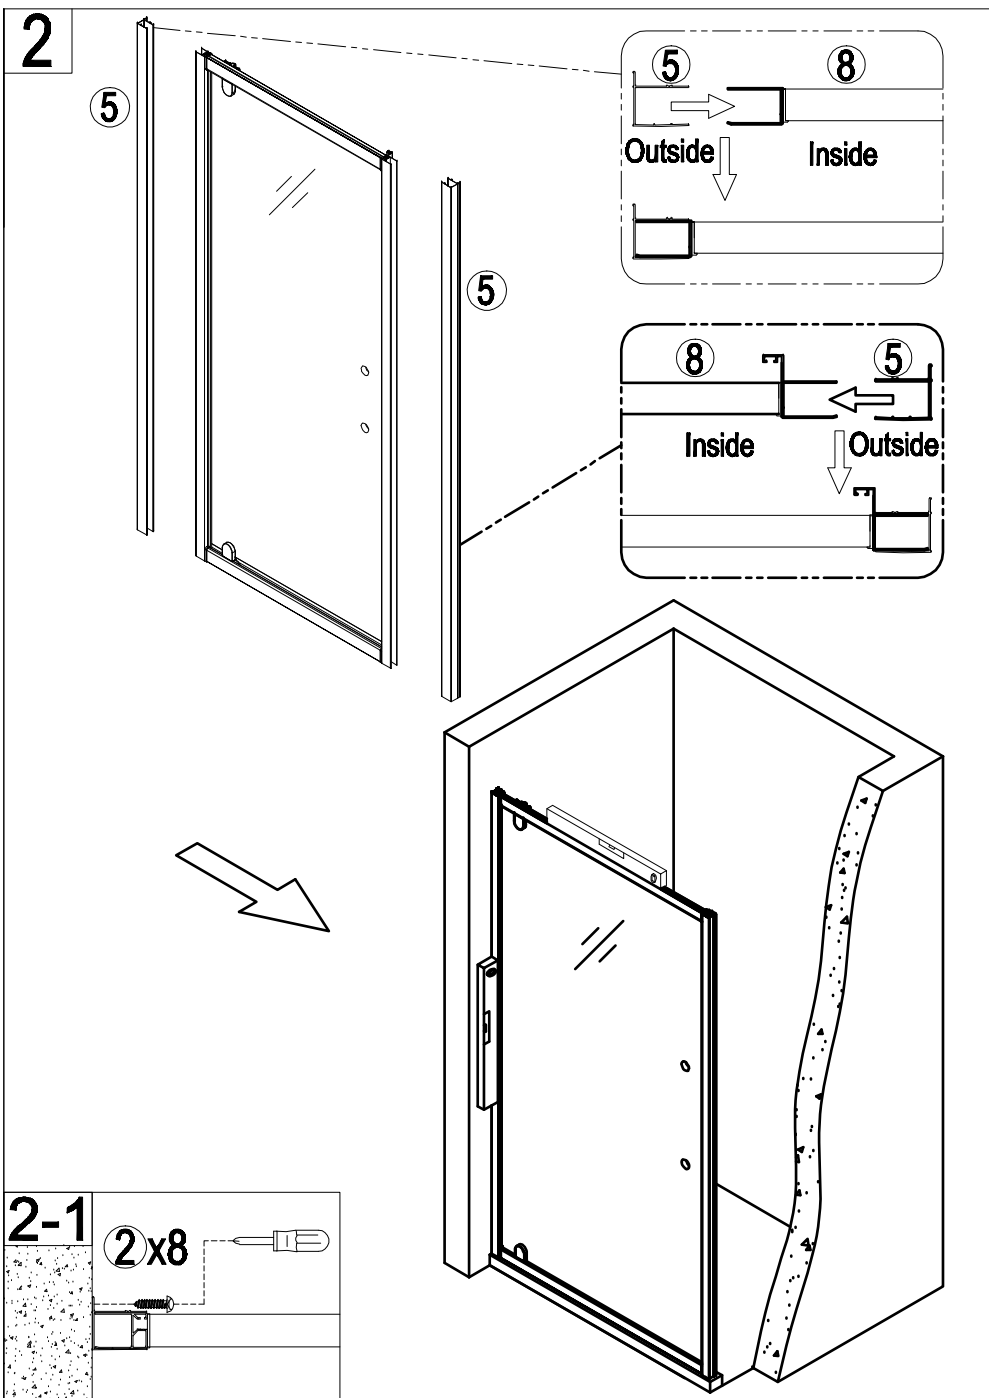


3






3

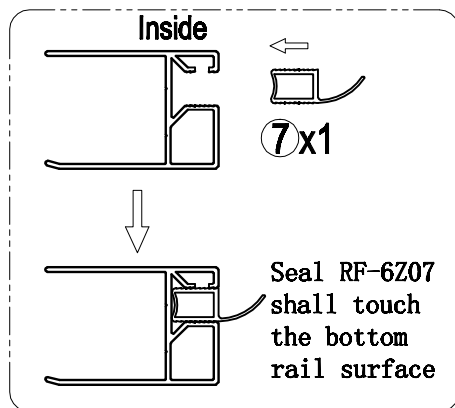




IT IS VERY IMPORTANT TO HAVE THE TOP OF THE GLASS PARALLEL TO THE RAIL BOTTOM FACE, IT MUST HAVE A 10MM EVEN GAP ALL THE WAY ALONG.

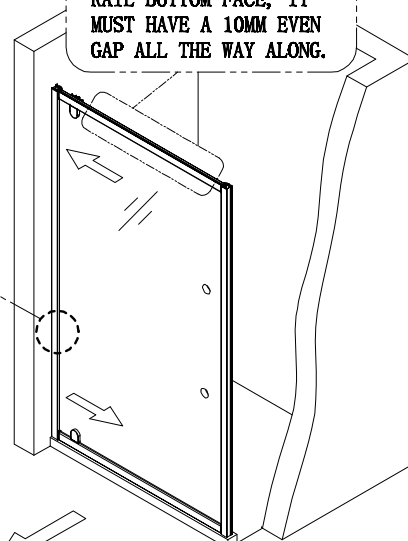








IT IS VERY IMPORTANT TO HAVE THE TOP OF THE GLASS PARALLEL TO THE RAIL BOTTOM FACE, IT MUST HAVE A 10MM EVEN GAP ALL THE WAY ALONG.

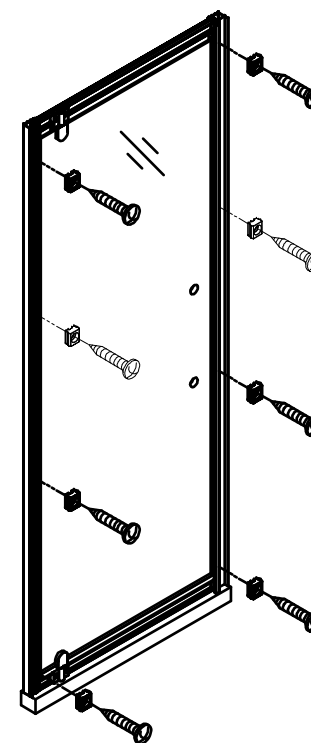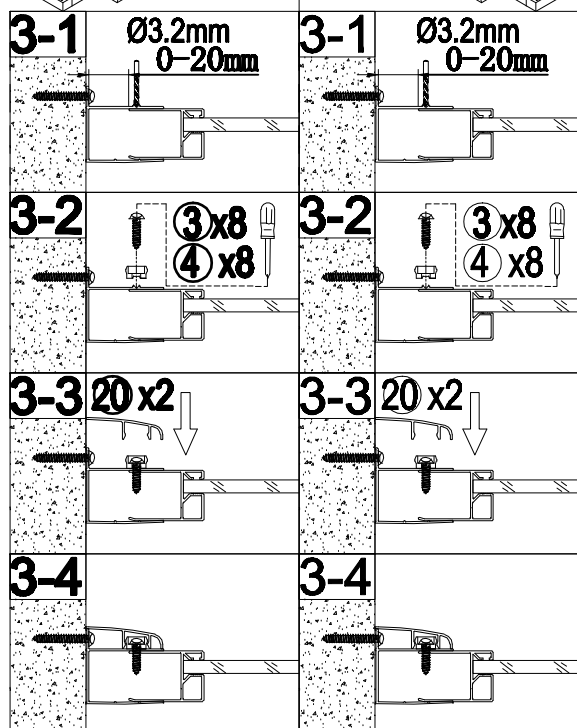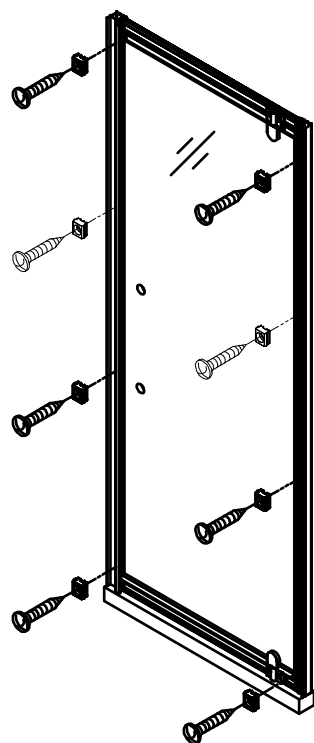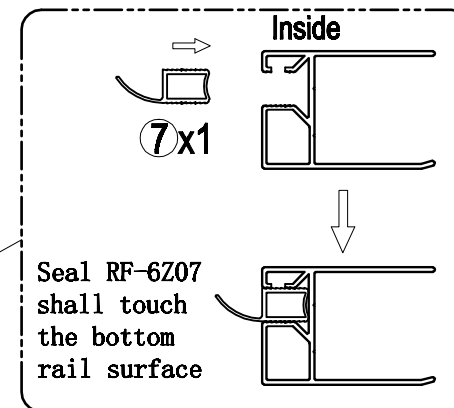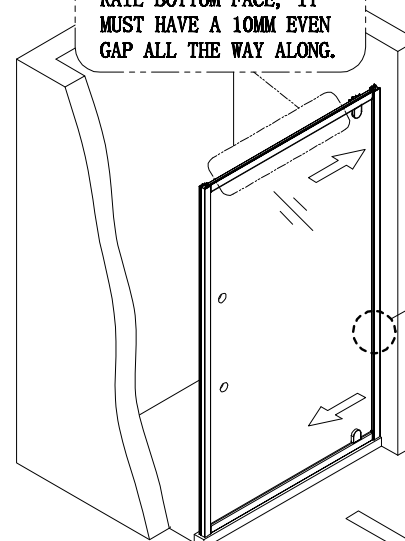

4

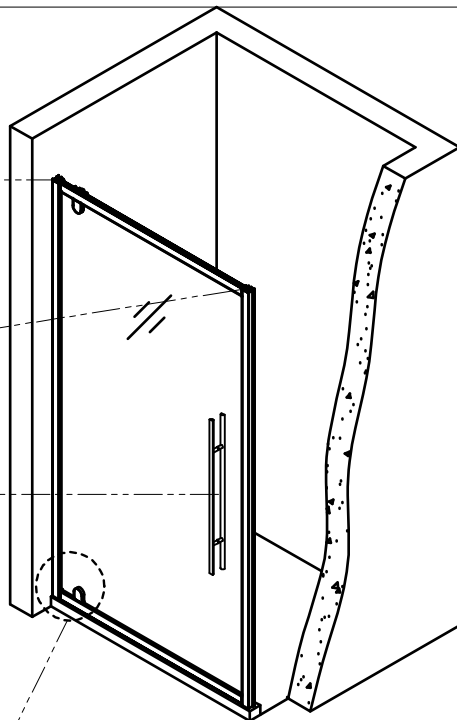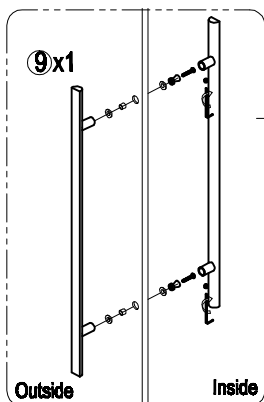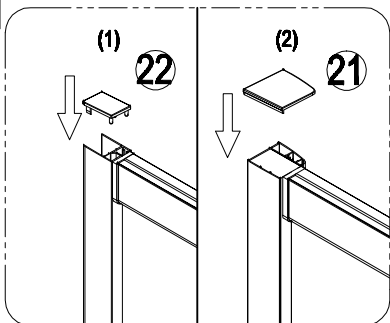


4

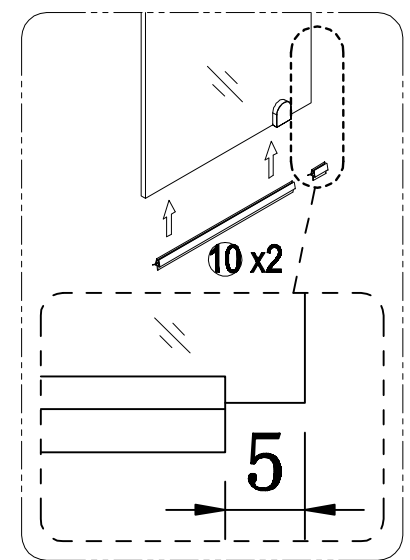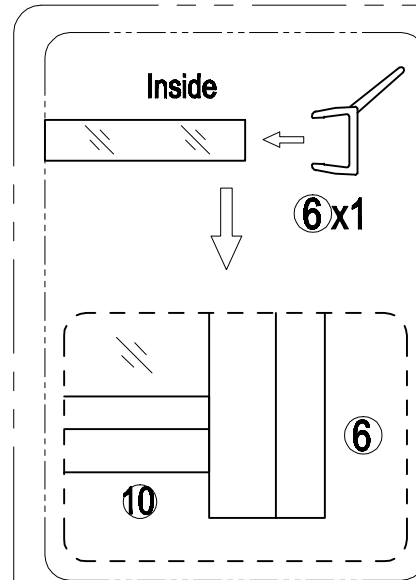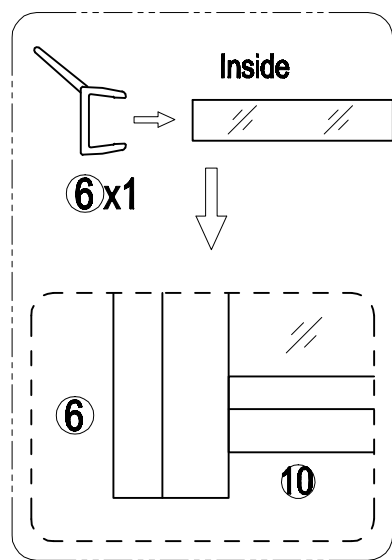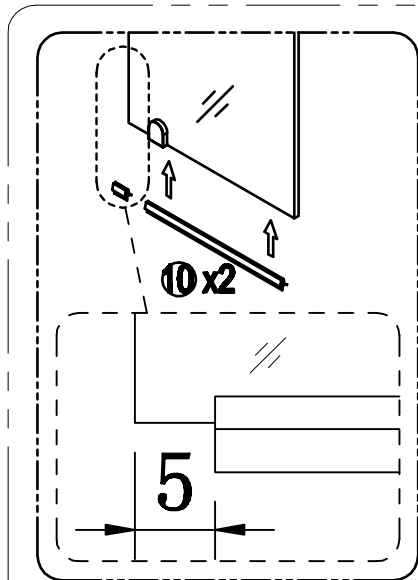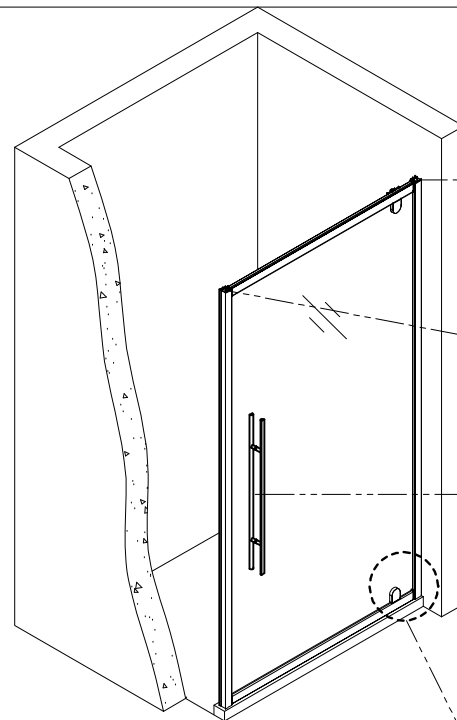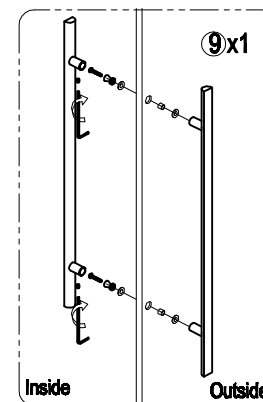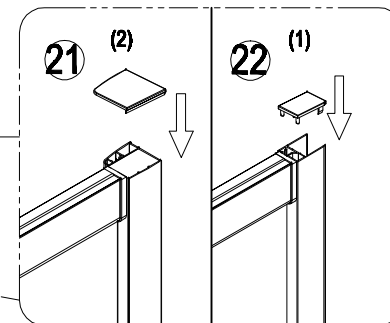

5

Care Instructions:


Do not use your shower enclosure within 24 hours of assembly .
Do not use caustic cleaning products or abrasive material when cleaning your shower enclosure.

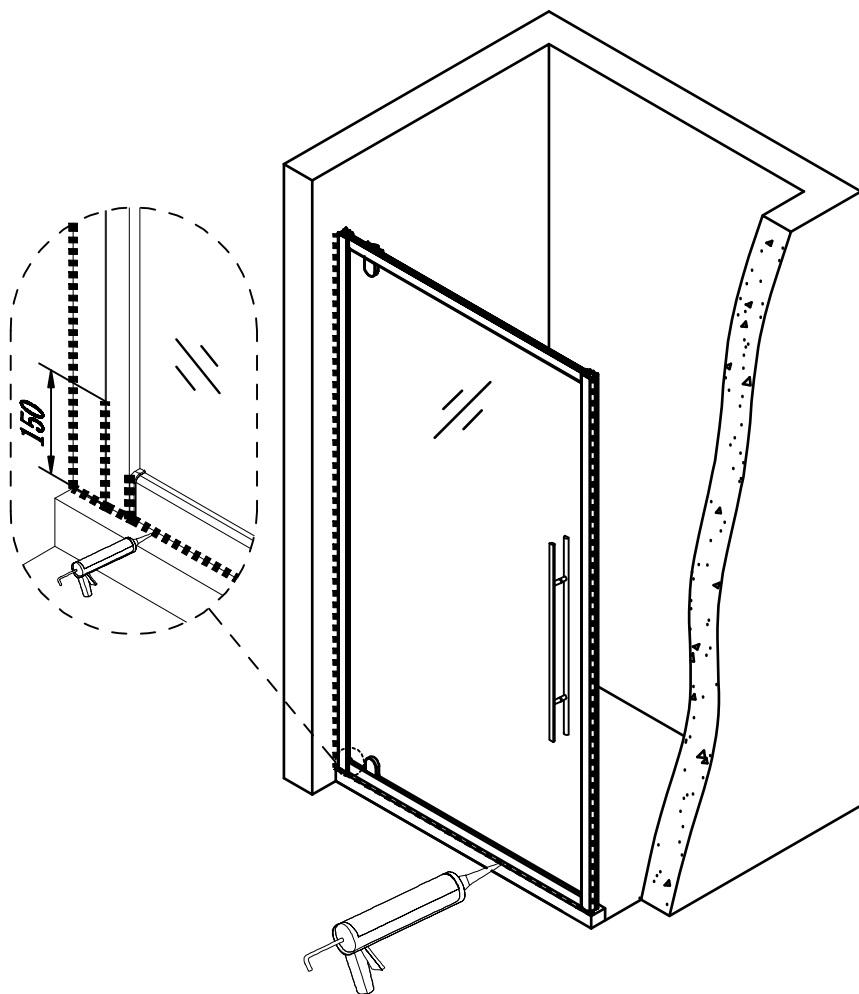

5

Care Instructions:

Do not use your shower enclosure within 24 hours of assembly .
Do not use caustic cleaning products or abrasive material when cleaning your shower enclosure.

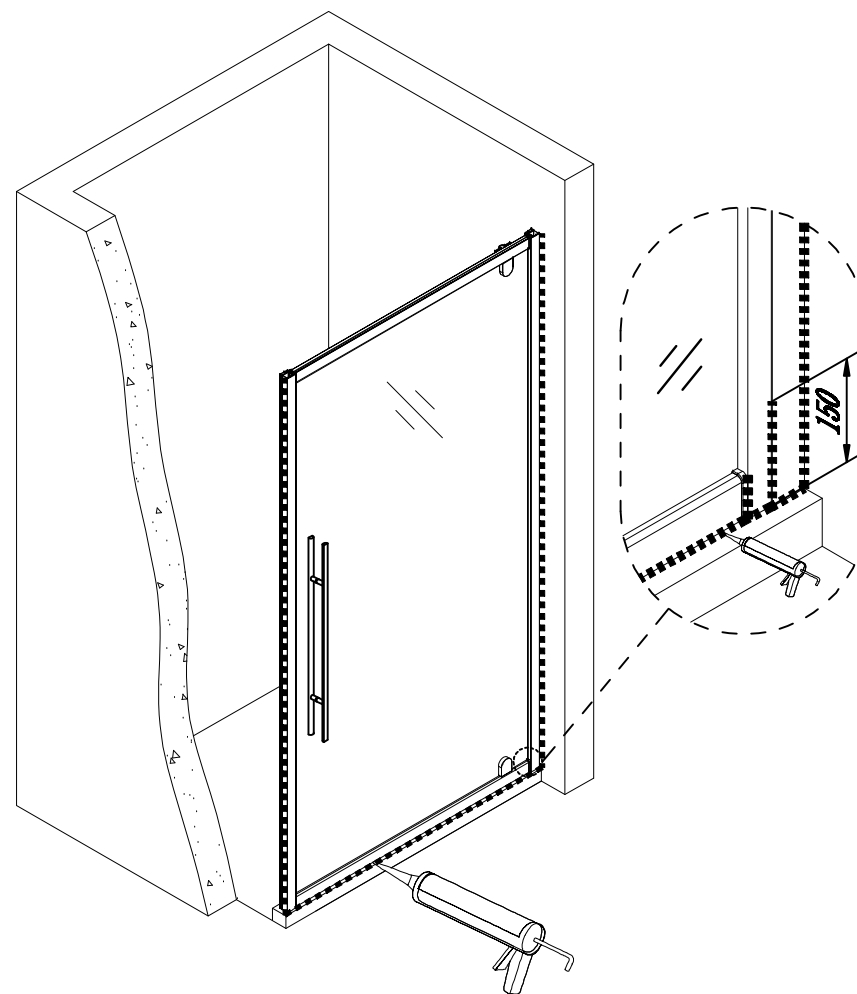



Eastbrook Road, Gloucester GL4 3DB

Technical Helpline: 01452 317890

Email: technical@eastbrookco.com

Cleaning and Maintenance of Shower Enclosures

Do not clean the shower enclosure with irritant detergents such as alcohol, bleach or other chemical cleaners.

Only clean with mild soapy water or a proprietary cleaner where the label advises it is suitable for the materials the enclosure is constructed from. Test on a small area first.

For treating limescale we would recommend distilled vinegar in a half and half solution with water.

Following installation should you find that there is a notable noise when the glass door moves you may add a small amount of silicon lubricant onto the roller wheels and tracks, hinges or clips.

It is the responsibility of the product owner to maintain the product as recommended above. Also, to check for parts which have broken or become loose to protect against failure of the enclosure.