

## Assembly of the toilet seat

10. Insert two expanded rubber pipe (K) onto the holes of pan, put adjustable plate (I) and metal washer (J) onto plastic plate (L).
11. Adjust small plate (I) onto proper position, tighten the screw (H).
12. Push and insert the seat cover (G) horizontally till sound of ticking.

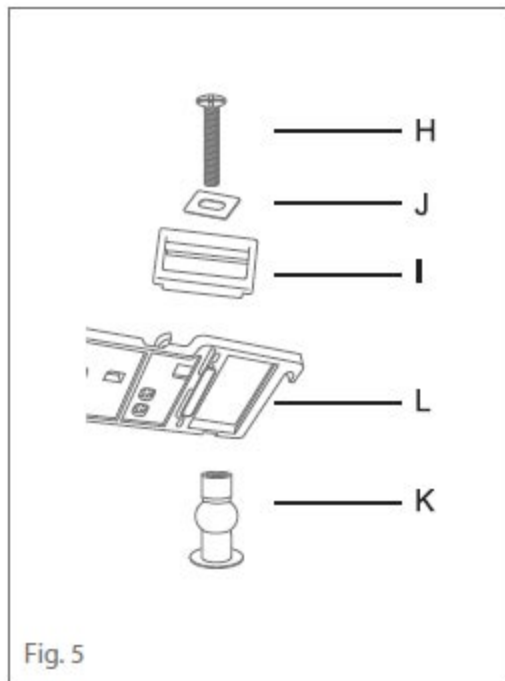


Fig. 5

## **Check out our full range of Bathroom Suites**

Bathroom Suites By Range

Cloakroom Suites

Toilets

Bathroom Sinks / Wash Basins

Bidets

Baths

## **Wide variety of toilets**

Close Coupled Toilets

Wall Hung Toilets

Back To Wall Toilets

Furniture unit toilets

## **Huge Selection of Baths**

Acrylic Baths

Steel Baths

Shower baths

Freestanding baths

Small baths

Corner baths

Whirlpool baths

## **Don't forget the important bathroom suite extras**

Bath panels

Toilet seats

**plumbworld**  
**Big brands, small prices.**