





POLAR WHITE - 9.5KW ELECTRIC SHOWER

DIMENSIONAL DRAWINGS

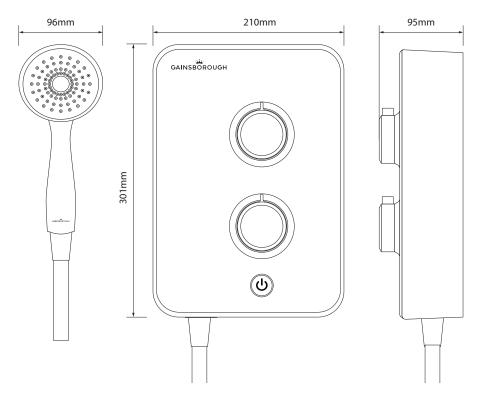

CONNECTIONS

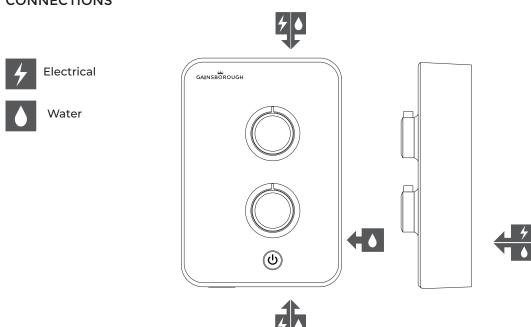





POLAR WHITE - 9.5KW ELECTRIC SHOWER

TECHNICAL SPECIFICATIONS

Power 9.5kW Minimum pressure requirements 1 bar Maximum pressure requirements 10 bar Water entry points Right - top, bottom, side and rear Cable entry points Right - top, bottom and rear Inlet fitting connections 15mm push fit, 15mm compression Outlet fitting connections 1/2" BSP thread Supply temperature Mains Cold Supply Only 5 - 25°C Electric requirements Supply voltage 230 - 240V Water system Mains cold system 3 Power settings Push button start/stop Temperature control Adjustable stainless steel rail
Maximum pressure requirements Right - top, bottom, side and rear Right - top, bottom and rear Inlet fitting connections I5mm push fit, 15mm compression Outlet fitting connections 1/2" BSP thread Supply temperature Mains Cold Supply Only 5 - 25°C Electric requirements Supply voltage 230 - 240V Water system Mains cold system 3 Power settings Push button start/stop Temperature control
Water entry points Right - top, bottom, side and rear Right - top, bottom and rear Right - top, bottom and rear Inlet fitting connections 1/2" BSP thread Supply temperature Mains Cold Supply Only 5 - 25°C Electric requirements Supply voltage 230 - 240V Water system Mains cold system 3 Power settings Push button start/stop Temperature control
Cable entry points Right - top, bottom and rear Inlet fitting connections 1/2" BSP thread Supply temperature Mains Cold Supply Only 5 - 25°C Electric requirements Supply voltage 230 - 240V Water system Mains cold system 3 Power settings Push button start/stop Temperature control
Inlet fitting connections 1/2" BSP thread 1/2" BSP thread Mains Cold Supply Only 5 - 25°C Electric requirements Supply voltage 230 - 240V Water system Mains cold system 3 Power settings Push button start/stop Temperature control
Outlet fitting connections 1/2" BSP thread Mains Cold Supply Only 5 - 25°C Electric requirements Supply voltage 230 - 240V Water system Mains cold system 3 Power settings Push button start/stop Temperature control
Supply temperature Mains Cold Supply Only 5 - 25°C Supply voltage 230 - 240V Water system Mains cold system 3 Power settings Push button start/stop Temperature control
Electric requirements Supply voltage 230 - 240V Water system Mains cold system 3 Power settings Push button start/stop Temperature control
Water system Mains cold system 3 Power settings Push button start/stop Temperature control
3 Power settings Push button start/stop Temperature control
Push button start/stop Temperature control Features
Temperature control Features
Features
Thermal cutout
Single mode handset
Colour Polar white
Shower Unit 2 year guarantee
Guarantee period Shower Head and Kit 2 year guarantee
CE Marking
BEAB
Approvals European Water Label
ERP Directive