

Geberit AquaClean Mera Comfort WC complete solution, wall-hung WC

GEBERIT





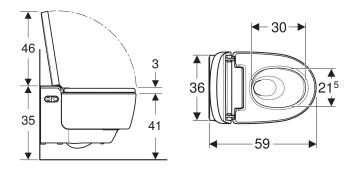

- APPLICATION PURPOSES
- · For convenient and odourless toilet use
- · For gently cleaning the anal and vaginal areas with water

CHARACTERISTICS

- Hybrid hot water system with continuous flow heater and storage water heater
- · Anal shower with double-nozzle WhirlSpray shower technology
- Separate Lady shower nozzle in protected park position
- Adjustable shower water temperature
- · Spray intensity can be set to five different levels
- Spray arm can be set to five different positions
- Adjustable oscillating spray (automatic forward and reverse motion of the spray arm)
- Automatic pre- and postrinsing of the spray nozzle with fresh water
- Descaling programme
- Rimless WC ceramic appliance featuring TurboFlush flush technology
- Washdown WC with special glaze KeraTect
- User detection
- Odour extraction with ceramic honey comb filter can be
 activated
- Odour extraction unit with run-on function
- Dryer can be activated
- · Dryer air intensity can be set to 5 positions

- Dryer arm can be extended
- Adjustable dryer temperature
- WC seat ring with rapid heating function
- · Adjustable temperature of the WC-seat heating
- · WC seat ring and WC lid with soft-closing mechanism
- WC lid with SoftOpening
- · Touchless opening and closing of the WC lid
- · Activation of the orientation light when aproaching
- · Orientation light can be set in seven colours
- · Functions and settings via remote control
- Three user profiles can be programmed
- Compatible with Geberit Home App
- Water supply connection on the left, hidden behind the WC ceramic
- Mains connection with flexible three-core sheathed cable, on the right side, hidden behind the WC ceramic
- External water supply connection on the left possible with accessories
- External mains connection with power outlet on the right possible
- Premounted sound insulation
- Approval in accordance with (DIN) EN 1717 / (DIN) EN 13077

TECHNICAL DATA

Protection degree	IPX4
Nominal voltage	230 V AC

Mains frequency	50 Hz
Power consumption standby	0.5 W
max.	
Flow pressure	0.5–10 bar
Operating temperature	5–40 °C
Water temperature, adjustment	34–40 °C
range	
Minimum flow pressure	0.5 bar
Calculated flow rate	0.03 l/s
Spray time	30–50 s
Load WC seat max.	150 kg
Odour extraction unit	Yes
SoftOpening	Yes
With WC seat ring heating	Yes
With orientation light	Yes
With dryer functionality	Yes

SCOPE OF DELIVERY

- Water supply connection set for Sigma and Omega concealed cisterns 12 cm, installation height 112 cm
- · Female socket for mains connection
- Spray shield
- Descaling agent, 125 ml
- Cleaning set
- · Connection set for WC, ø 90 mm
- Remote control with wall-mounted case and battery CR2032



• Fastening material

• Interface module 4.1 V for Geberit AquaClean Mera / Sela

ACCESSORIES

- Wall-mounted control panel for Geberit AquaClean
- Interface module 12 V for Geberit AquaClean Mera/Sela
- Wall-mounted control panel, touchless, for Geberit AquaClean

INFO

• This product is supplied with the Geberit AquaClean descaling agent. This consumable contains classified hazardous substances. Information, instructions and measures for handling hazardous substances safely can be found at www.geberit.com.

412 AQ	Colour / surface	4	87 Cm	1 5	چ ۲	Prov	Power converting W sumption	
146.210.11.1	WC ceramic appliance: white / KeraTect Design cover: white	39.5	39.5	38	59	I	2000	