


Geberit AquaClean Tuma Classic WC enhancement solution

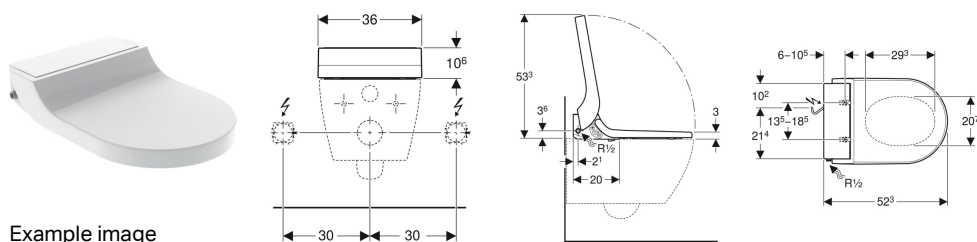

Example image

Application purposes

- For convenient toilet use
- For gently cleaning the anal area with water
- For subsequent mounting on WC ceramic appliances (replaces WC seat)

Characteristics

- Water heating via continuous flow heater
- Anal shower with WhirlSpray shower technology
- Spray arm with nozzle can be extended for anal area
- Spray intensity can be set to five different levels
- Oscillating spray (automatic forward and reverse motion of the spray arm)
- Automatic pre- and postrinsing of the spray nozzle with fresh water
- Descaling programme
- WC seat ring and WC lid with soft-closing mechanism
- WC lid with SoftOpening
- Water supply connection on the left
- Mains connection at rear, with hidden pipe-laying option to the left or right
- Mains connection cable can be cut to length
- Approval in accordance with (DIN) EN 1717 / (DIN) EN 13077
- Compatible with Geberit Home App
- Shower water temperature can be adjusted via Geberit Home App
- Continuous flow heater can be deactivated via Geberit Home App
- Spray arm can be set to five different positions via Geberit Home App

Technical data

| | |
|--|------------|
| Protection degree | IPX4 |
| Nominal voltage | 230 V AC |
| Mains frequency | 50 Hz |
| Power consumption standby max. | 0.5 W |
| Cable length | 2 m |
| Flow pressure | 0.5–10 bar |
| Operating temperature | 5–40 °C |
| Water temperature, adjustment range | 34–40 °C |
| Water temperature, factory setting | 37 °C |
| Calculated flow rate | 0.02 l/s |
| Minimum flow pressure for calculated flow rate | 0.5 bar |
| Spray time | 50 s |
| Load WC seat max. | 150 kg |
| Odour extraction unit | No |
| SoftOpening | Yes |
| With WC seat ring heating | No |
| With dryer functionality | No |

Scope of delivery

- Reinforced braided hose 3/8", with bend 1/2"
- Spray shield
- Fastening material
- Compensation pad for WC seat / ceramic appliance
- Descaling agent, 125 ml

To order additionally

- Water supply connection set

| Art. no. | Colour / surface | B | H | T | Protection class | Power consumption |
|--------------|------------------|-------|---------|---------|------------------|-------------------|
| 146.078.11.1 | white | 36 cm | 10.6 cm | 52.3 cm | I | 2000 W |

Accessories

- Conversion set for Geberit AquaClean WC enhancement solutions



• This product is supplied with the Geberit AquaClean descaling agent. This consumable contains classified hazardous substances. Information, instructions and measures for handling hazardous substances safely can be found at www.geberit.com.

- Choose water supply connection set according to the installation type

- For ceramic compability please contact Geberit AquaClean 0800 0075 133 to request a template