


**Geberit AquaClean Tuma Comfort WC complete solution, floor-standing WC, back-to-wall**



Example image

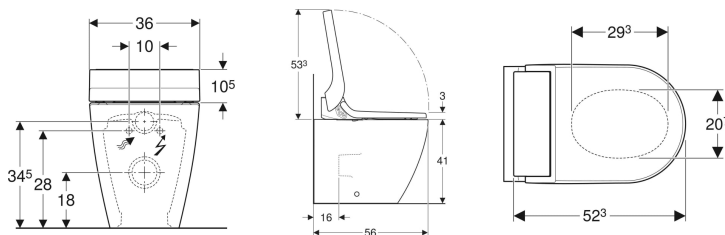

**Application purposes**

- For convenient and odourless toilet use
- For gently cleaning the anal and vaginal areas with water

**Characteristics**

- Water heating via continuous flow heater
- Anal shower with WhirlSpray shower technology
- Separate Lady shower nozzle in protected park position
- Continuous flow heater can be deactivated
- Spray arm with nozzle can be extended for anal and vaginal area
- Spray intensity can be set to five different levels
- Spray arm can be set to five different positions
- Adjustable oscillating spray (automatic forward and reverse motion of the spray arm)
- Automatic pre- and postrinsing of the spray nozzle with fresh water
- Descaling programme
- Rimless WC ceramic appliance
- Washdown WC with special glaze KeraTect
- User detection
- Odour extraction with ceramic honey comb filter can be activated
- Odour extraction unit with run-on function
- Dryer can be activated
- WC seat ring with rapid heating function
- WC seat ring and WC lid with soft-closing mechanism
- WC lid with SoftOpening
- Functions and settings via remote control
- Four user profiles can be programmed
- Water supply connection on the left, hidden behind the WC ceramic
- Mains connection with flexible three-core sheathed cable, on the right side, hidden behind the WC ceramic
- Floor inlets of 6–28 cm from wall in combination with Geberit Monolith sanitary modules for floor-standing WC possible
- Approval in accordance with (DIN) EN 1717 / (DIN) EN 13077

- Compatible with Geberit Home App
- Shower water temperature can be adjusted via Geberit Home App
- Dryer temperature can be adjusted via Geberit Home App
- Temperature of the WC seat heating can be adjusted via Geberit Home App
- Can be combined with Geberit Monolith sanitary module for floor-standing WC

**Technical data**

Protection degree	IPX4
Nominal voltage	230 V AC
Mains frequency	50 Hz
Power consumption standby max.	0.5 W
Flow pressure	0.5–10 bar
Operating temperature	5–40 °C
Water temperature, adjustment range	34–40 °C
Water temperature, factory setting	37 °C
Calculated flow rate	0.02 l/s
Minimum flow pressure for calculated flow rate	0.5 bar
Spray time	50 s
Load WC seat max.	150 kg
Odour extraction unit	Yes
SoftOpening	Yes
With WC seat ring heating	Yes
With orientation light	No
With dryer functionality	Yes

**Scope of delivery**

- Water supply connection set
- Female socket for mains connection
- Sound insulation set
- Spray shield
- Compensation pad for WC seat / ceramic appliance
- Descaling agent, 125 ml
- Cleaning set
- Connection set for WC, ø 90 mm
- Remote control with wall-mounted case and battery CR2032
- Fastening material

Art. no.	Colour / surface	B	B1	H	T	Protection class	Power consumption
146.310.11.1	WC ceramic appliance: white / KeraTect Design cover: white	36 cm	36 cm	51.5 cm	56 cm	I	2000 W
146.310.FW.1	WC ceramic appliance: white / KeraTect Design cover: brushed stainless steel	36 cm	36 cm	51.5 cm	56 cm	I	2000 W
146.310.SI.1	WC ceramic appliance: white / KeraTect Design cover: white glass	36 cm	36 cm	51.5 cm	56 cm	I	2000 W
146.310.SJ.1	WC ceramic appliance: white / KeraTect Design cover: black glass	36 cm	36 cm	51.5 cm	56 cm	I	2000 W

**Accessories**

- Wall-mounted control panel for Geberit AquaClean
- Wall-mounted control panel, touchless, for Geberit AquaClean
- Geberit P-bend set for floor-standing WC
- Geberit connection set for floor-standing WC



- 
- This product is supplied with the Geberit AquaClean descaling agent. This consumable contains classified hazardous substances. Information, instructions and measures for handling hazardous substances safely can be found at [www.geberit.com](http://www.geberit.com).