


Geberit AquaClean Tuma Comfort WC enhancement solution

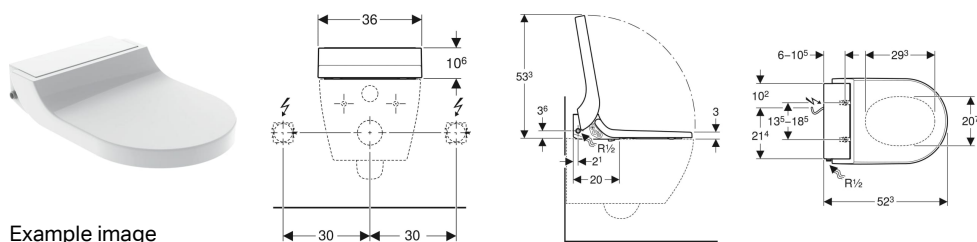

Example image

Application purposes

- For convenient and odourless toilet use
- For gently cleaning the anal and vaginal areas with water
- For subsequent mounting on WC ceramic appliances (replaces WC seat)

Characteristics

- Water heating via continuous flow heater
- Anal shower with WhirlSpray shower technology
- Separate Lady shower nozzle in protected park position
- Continuous flow heater can be deactivated
- Spray arm with nozzle can be extended for anal and vaginal area
- Spray intensity can be set to five different levels
- Spray arm can be set to five different positions
- Adjustable oscillating spray (automatic forward and reverse motion of the spray arm)
- Automatic pre- and postrinsing of the spray nozzle with fresh water
- Descaling programme
- User detection
- Odour extraction with ceramic honey comb filter can be activated
- Odour extraction unit with run-on function
- Dryer can be activated
- WC seat ring with rapid heating function
- WC seat ring and WC lid with soft-closing mechanism
- WC lid with SoftOpening
- Functions and settings via remote control
- Four user profiles can be programmed
- Water supply connection on the left
- Mains connection at rear, with hidden pipe-laying option to the left or right
- Mains connection cable can be cut to length

- Approval in accordance with (DIN) EN 1717 / (DIN) EN 13077
- Compatible with Geberit Home App
- Shower water temperature can be adjusted via Geberit Home App
- Dryer temperature can be adjusted via Geberit Home App
- Temperature of the WC seat heating can be adjusted via Geberit Home App

Technical data

Protection degree	IPX4
Nominal voltage	230 V AC
Mains frequency	50 Hz
Power consumption standby max.	0.5 W
Cable length	2 m
Flow pressure	0.5–10 bar
Operating temperature	5–40 °C
Water temperature, adjustment range	34–40 °C
Water temperature, factory setting	37 °C
Calculated flow rate	0.02 l/s
Minimum flow pressure for calculated flow rate	0.5 bar
Spray time	50 s
Load WC seat max.	150 kg
Odour extraction unit	Yes
SoftOpening	Yes
With WC seat ring heating	Yes
With dryer functionality	Yes

Scope of delivery

- Reinforced braided hose 3/8", with bend 1/2"
- Spray shield
- Compensation pad for WC seat / ceramic appliance
- Descaling agent, 125 ml
- Cleaning set
- Remote control with wall-mounted case and battery CR2032
- Fastening material

To order additionally

- Water supply connection set

Art. no.	Colour / surface	B	H	T	Protection class	Power consumption
146.278.11.1	white	36 cm	10.6 cm	52.3 cm	I	2000 W
146.278.FW.1	stainless steel brushed	36 cm	10.6 cm	52.3 cm	I	2000 W
146.278.SI.1	white / glass	36 cm	10.6 cm	52.3 cm	I	2000 W
146.278.SJ.1	black / glass	36 cm	10.6 cm	52.3 cm	I	2000 W

Accessories

- Wall-mounted control panel for Geberit AquaClean
- Wall-mounted control panel, touchless, for Geberit AquaClean
- Conversion set for Geberit AquaClean WC enhancement solutions



-
- This product is supplied with the Geberit AquaClean descaling agent. This consumable contains classified hazardous substances. Information, instructions and measures for handling hazardous substances safely can be found at www.geberit.com.
 - Choose water supply connection set according to the installation type
 - For ceramic compability please contact Geberit AquaClean 0800 0075 133 to request a template