


## Geberit AquaClean Tuma Comfort WC enhancement solution

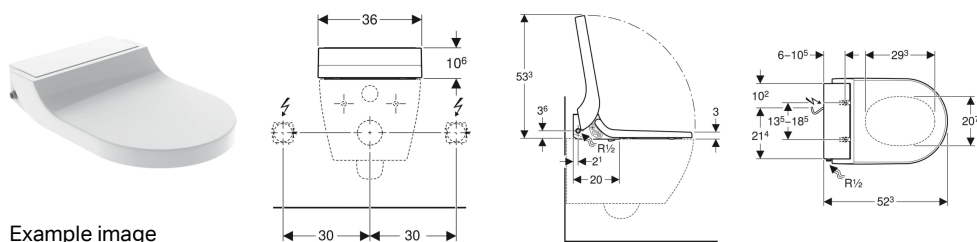

### Application purposes

- For convenient and odourless toilet use
- For gently cleaning the anal and vaginal areas with water
- For subsequent mounting on WC ceramic appliances (replaces WC seat)

### Characteristics

- Water heating via continuous flow heater
- Anal shower with WhirlSpray shower technology
- Separate Lady shower nozzle in protected park position
- Continuous flow heater can be deactivated
- Spray arm with nozzle can be extended for anal and vaginal area
- Spray intensity can be set to five different levels
- Spray arm can be set to five different positions
- Adjustable oscillating spray (automatic forward and reverse motion of the spray arm)
- Automatic pre- and postrinsing of the spray nozzle with fresh water
- Descaling programme
- User detection
- Odour extraction with ceramic honey comb filter can be activated
- Odour extraction unit with run-on function
- Dryer can be activated
- WC seat ring with rapid heating function
- WC seat ring and WC lid with soft-closing mechanism
- WC lid with SoftOpening
- Functions and settings via remote control
- Four user profiles can be programmed
- Water supply connection on the left
- Mains connection at rear, with hidden pipe-laying option to the left or right
- Mains connection cable can be cut to length

### Scope of delivery

- Reinforced braided hose 3/8", with bend 1/2"
- Spray shield
- Compensation pad for WC seat / ceramic appliance
- Descaling agent, 125 ml

### To order additionally

- Water supply connection set

- Approval in accordance with (DIN) EN 1717 / (DIN) EN 13077
- Compatible with Geberit Home App
- Shower water temperature can be adjusted via Geberit Home App
- Dryer temperature can be adjusted via Geberit Home App
- Temperature of the WC seat heating can be adjusted via Geberit Home App

### Technical data

|                                                |            |
|------------------------------------------------|------------|
| Protection degree                              | IPX4       |
| Nominal voltage                                | 230 V AC   |
| Mains frequency                                | 50 Hz      |
| Power consumption standby max.                 | 0.5 W      |
| Cable length                                   | 2 m        |
| Flow pressure                                  | 0.5–10 bar |
| Operating temperature                          | 5–40 °C    |
| Water temperature, adjustment range            | 34–40 °C   |
| Water temperature, factory setting             | 37 °C      |
| Calculated flow rate                           | 0.02 l/s   |
| Minimum flow pressure for calculated flow rate | 0.5 bar    |
| Spray time                                     | 50 s       |
| Load WC seat max.                              | 150 kg     |
| Odour extraction unit                          | Yes        |
| SoftOpening                                    | Yes        |
| With WC seat ring heating                      | Yes        |
| With dryer functionality                       | Yes        |

- Cleaning set
- Remote control with wall-mounted case and battery CR2032
- Fastening material

| Art. no.     | Colour / surface        | B     | H       | T       | Protection class | Power consumption |
|--------------|-------------------------|-------|---------|---------|------------------|-------------------|
| 146.278.11.1 | white                   | 36 cm | 10.6 cm | 52.3 cm | I                | 2000 W            |
| 146.278.FW.1 | stainless steel brushed | 36 cm | 10.6 cm | 52.3 cm | I                | 2000 W            |
| 146.278.SI.1 | white / glass           | 36 cm | 10.6 cm | 52.3 cm | I                | 2000 W            |
| 146.278.SJ.1 | black / glass           | 36 cm | 10.6 cm | 52.3 cm | I                | 2000 W            |

### Accessories

- Wall-mounted control panel for Geberit AquaClean
- Wall-mounted control panel, touchless, for Geberit AquaClean
- Conversion set for Geberit AquaClean WC enhancement solutions



- 
- This product is supplied with the Geberit AquaClean descaling agent. This consumable contains classified hazardous substances. Information, instructions and measures for handling hazardous substances safely can be found at [www.geberit.com](http://www.geberit.com).
  - Choose water supply connection set according to the installation type
  - For ceramic compability please contact Geberit AquaClean 0800 0075 133 to request a template