


Geberit CleanLine50 shower channel

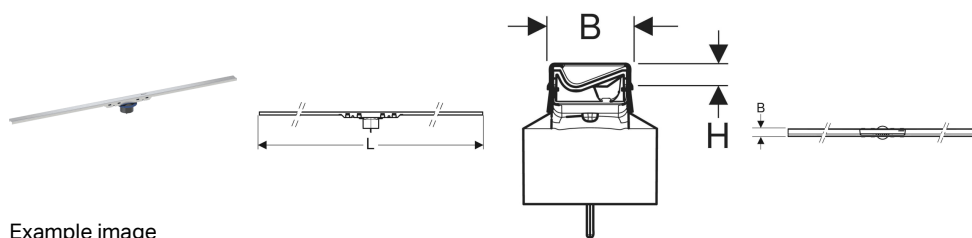

Example image

Application purposes

- For drainage of floor-even showers
- For installation in the room or on the wall
- For installation in thin bed mortar
- For composite seals
- Suitable for less-abled installation

Characteristics

- Quality-monitored in accordance with EN 1253-3
- With integrated slope
- Shower channel can be cut to length
- Suitable for tile structures on floor from 10–35 mm
- Shower channel can be aligned in height, inclination and offset
- Easy cleaning

- Water drainage above the composite seal
- Water drainage above the finished floor when using the sleeve
- With anti-fingerprint coating (only for models in black chrome)
- Discharge rate 0.4 l/s when using the installation set with 30 mm water seal depth and 65 mm screed height at inlet
- Discharge rate 0.6 l/s when using the installation set with 50 mm water seal depth and 90 mm screed height at inlet
- Discharge rate 0.8 l/s when using the installation set with 50 mm water seal depth and 140 mm screed height at inlet
- Discharge rate 1 l/s when using the installation set with 50 mm water seal depth and 200 mm screed height at inlet

Technical data

Product material | CrNiMo steel 1.4404 (EN 10088)

Scope of delivery

- Comb insert
- Inlet connection piece with compensation ring
- Suction cup
- Sleeve

To order additionally

- Installation set for shower channels of the CleanLine series

Art. no.	Colour / surface	L	B	H
154.446.KS.1	stainless steel brushed	30–90 cm	3 cm	1 cm
154.446.QC.1	Frame: black chrome / brushed, coated Surface: black chrome / brushed, coated	30–90 cm	3 cm	1 cm
154.447.KS.1	stainless steel brushed	30–130 cm	3 cm	1 cm
154.447.QC.1	Frame: black chrome / brushed, coated Surface: black chrome / brushed, coated	30–130 cm	3 cm	1 cm



- Natural stone tiles in the shower area may discolour