
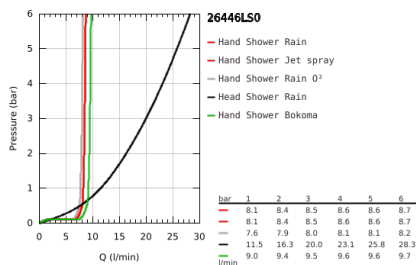


26 446 LS0 RAINSHOWER SYSTEM SMARTCONTROL MONO 360 COMBI SHOWER SYSTEM WITH THERMOSTAT, EXPOSED/CONCEALED

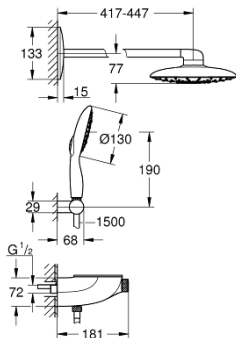

PRODUCT DESCRIPTION

- Colour: moon white
- Consisting of:
 - exposed/concealed SmartControl thermostat
 - allows change between:
 - head shower Rainshower Mono 360 with horizontal 450 mm shower arm, spray plate white
 - GROHE PureRain/GROHE Rain O2 spray*
 - maximum flow rate (at 3 bar): 20 l/min
 - Power&Soul 130 hand shower, spray plate white (27 673)
 - maximum flow rate (at 3 bar): 9.5 l/min
 - hand shower wall holder (27 055)
 - Silverflex shower hose 1.500 mm (28 364)
 - min. recommended pressure 1.5 bar
 - GROHE DreamSpray perfect spray pattern
 - GROHE Long-Life finish
 - GROHE CoolTouch prevents scalding on hot surfaces
 - GROHE TurboStat compact cartridge with wax thermoelement
 - GROHE Water Saving - Less water, perfect flow
 - GROHE SafeStop safety button at 38°C(calibration required)
 - GROHE SafeStop Plus optional temperature limiter at 43°C included
 - GROHE SmartControl push for ON-OFF, turn for volume adjustment from GROHE Water Saving to Full Flow
 - GROHE EasyReach shower tray
 - SpeedClean anti-limescale system
 - Inner WaterGuide for a longer life
 - TwistStop preventing the hose from twisting
- requires rough-in set 26 264and concealed unit 26 449 – all to be ordered separately
- * to be decided during initial installation; factory default setting: GROHE PureRain

26 446 LS0 RAINSHOWER SYSTEM SMARTCONTROL MONO 360 COMBI SHOWER SYSTEM WITH THERMOSTAT, EXPOSED/CONCEALED

