

hansgrohe Activera Q

290/180 EcoSmart

ShowerTablet Select Bar Mixer Shower

English installation and care guide

English content extracted from the supplied manufacturer guide.

Installation diagrams are reproduced from the original PDF.

Contents

Safety, installation, technical data and troubleshooting	2
Assembly diagrams	3-4
Thermostat adjustment diagrams	4-5
Activera Q dimensions and flow diagrams	6
Cleaning guidance and manufacturer links	7
Cleaning diagrams	8
Maintenance diagrams	9
Spare parts and accessories	10
Test certificates and operation diagrams	11

Notes on the original page references

Original page numbers are retained on the extracted manufacturer pages.

Dimensions and flow data for Activera Q are on original page 37.

Operation diagrams are on original page 42; original page 43 is blank.

The shared parts diagram also identifies Activera S and EcoSmart+ variants.

Source: hansgrohe document 9.01680.01, dated 04/2026.

**Safety Notes**

- ⚠️ Gloves should be worn during installation to prevent crushing and cutting injuries.
- ⚠️ The product may only be used for bathing, hygienic and body cleaning purposes.
- ⚠️ The arm of the shower head is intended only to hold the shower head. Do not load it down with other objects!
- ⚠️ Children as well as adults with physical, mental and/or sensoric impairments must not use this product without proper supervision. Persons under the influence of alcohol or drugs are prohibited from using this product.
- ⚠️ Do not allow the streams of the shower touch sensitive body parts (such as your eyes). An adequate distance must be kept between the shower and you.
- ⚠️ The product may not be used as a holding handle. A separate handle must be installed.
- ⚠️ The hot and cold supplies must be of equal pressures.

Installation Instructions

- Prior to installation, inspect the product for transport damages. After it has been installed, no transport or surface damage will be honoured.
- The pipes and the fixture must be installed, flushed and tested as per the applicable standards.
- The plumbing codes applicable in the respective countries must be observed.
- The installation dimensions stated in these installation instructions are ideal for people of approximately 1800 mm in body height. The dimensions can be altered if required. In this case, pay attention to the fact that a change of installation height will also change the minimum height, and that the altered mounting dimensions must be taken into consideration.
- During installation of the product by qualified trained personnel, make sure that the entire fastening surface is even and smooth (no protruding seams or tile offset), that the finish of the wall is suitable to apply the product and has no weak points.
- The filter insert must be used to protect the shower against incoming dirt by pipework. Incoming dirt leads to defects or/and can damage parts of the shower; such caused faults voids all liability and guarantee claims.
- The premounted filter insert must be used to ensure a normal flow of the shower and to prevent dirt from entering through the pipes. Dirt entering can affect the function and/or lead to damages to the shower. Hansgrohe will not be held liable for this type of damage.
- The product is not designed to be used with steam baths!
- If required, the bottom part of the pipe between the fixture and the shower head can be shortened with a fine-toothed saw.

Special information for UK

If installing this product with a pump, please be aware that it has to have negative head switching. This product will not function with a positive head pump.

Technical Data

Operating pressure:	max. 1 MPa
Recommended operating pressure:	0,1 - 0,5 MPa
Test pressure:	1,6 MPa (1 MPa = 10 bar = 145 PSI)
Hot water temperature:	max. 60 °C
Centre distance:	150 ± 12 mm
Connections G 1/2:	cold right - hot left
Thermal disinfection:	70 °C / 4 min

- Safety against backflow
- The product is exclusively designed for drinking water!

Symbol description

Do not use silicone containing acetic acid!



Adjustment (see page 34)

After the installation, the output temperature of the thermostat must be checked. A correction is necessary if the temperature measured at the output differs from the temperature set on the thermostat.



Maintenance (see page 40)

- The check valves must be checked regularly according to EN 806-5 in accordance with national or regional regulations (at least once a year).
- To guarantee the smooth running of the thermostat, it is necessary from time to time to turn the thermostat from total hot to total cold.



Dimensions (see page 36)



Flow diagram (see page 36)

- ① Overhead shower
- ② Hand shower



Spare parts (see page 41)

XX = Colors
00 = Chrome Plated
67 = Matt Black

Special accessories (order as an extra)

ball S-unions #85368000 (see page 41)



tile-matching-disk #92950XX0 (see page 41)



Cleaning (see page 38)
















Operation (see page 43)











To empty the overhead shower after use, hold it in a slightly inclined position.














Test certificate (see page 42)

Fault	Cause	Remedy
Insufficient water	- Supply pressure inadequate	- Check water pressure (If a pump has been installed check to see if the pump is working).
	- Regulator filter dirty	- Clean filter in front of the mixer and on the MTC-thermo cartridge
	- Shower filter seal dirty	- Clean filter seal between shower and hose
Crossflow, hot water being forced into cold water pipe, or vice versa, when mixer is closed	- Backflow preventers dirty or leaking	- Clean backflow preventers, exchange if necessary
Spout temperature does not correspond with temperature set	- Thermostat has not been adjusted	- Adjust thermostat
	- Hot water temperature too low	- Increase hot water temperature to 42 °C to 60 °C
Temperature regulation not possible	- thermo cartridge calcified	- Exchange thermo cartridge
	- Hot and cold supplies are reversed	- Control unit for reversed connections #92373000
Instantaneous heater didn't work with thermostat	- Filters are dirty	- Clean the filter / exchange filter
	- check valve hasn't moved back	- Exchange check valves
Safety stop button not operating	- Spring defective	- Clean spring and/or button, exchange if necessary
	- Button calcified	
Select button stiff	- Select button soiled	- Exchange shut-off unit

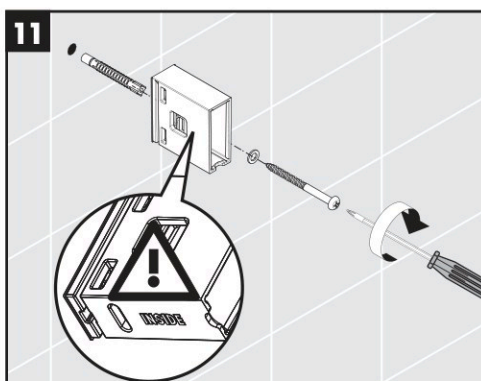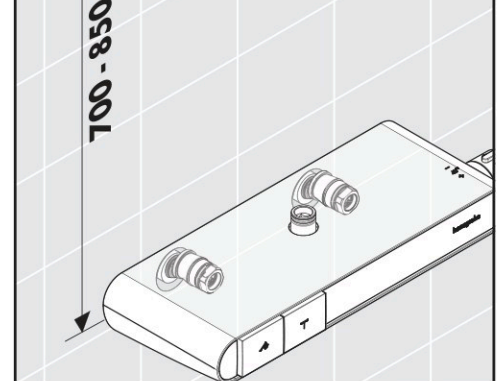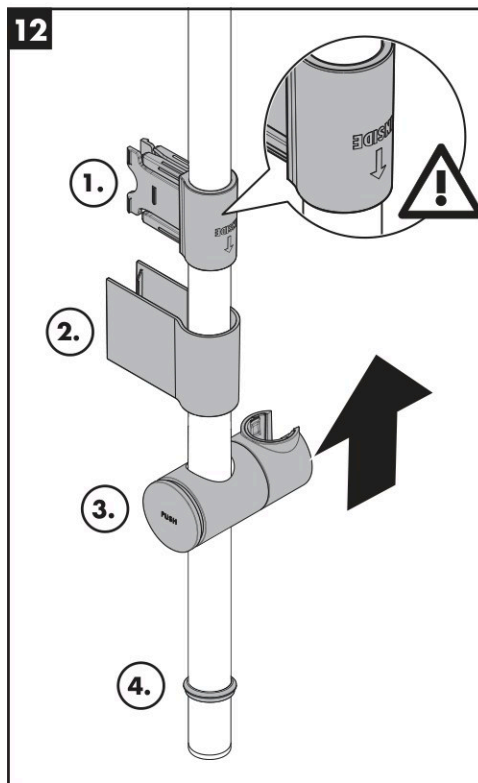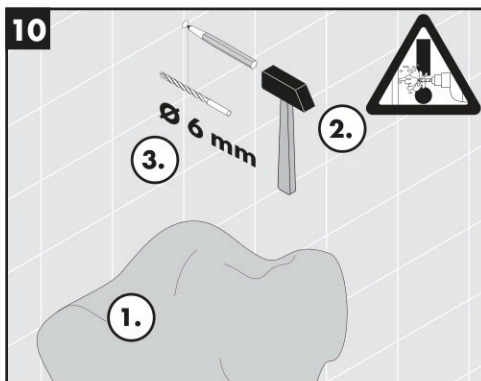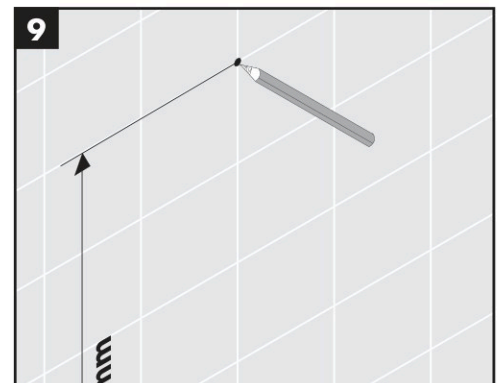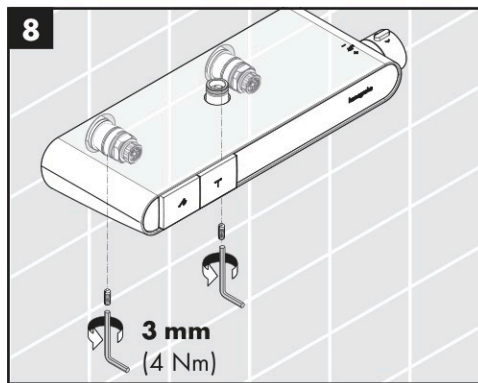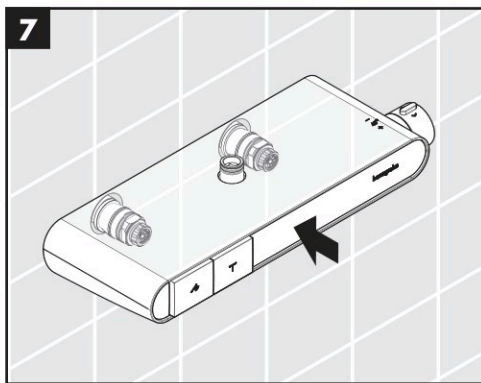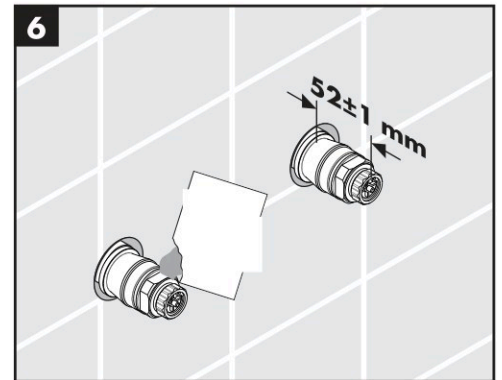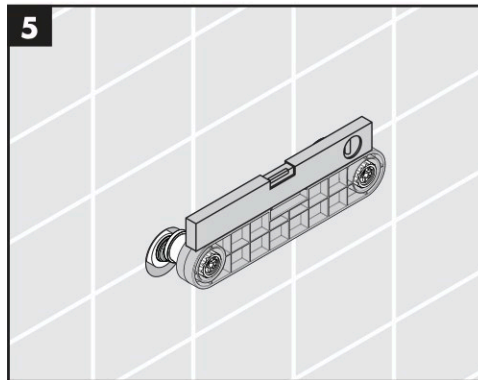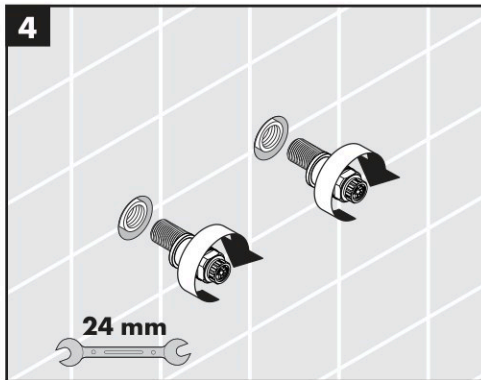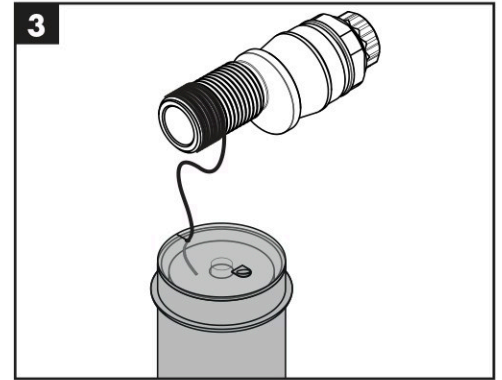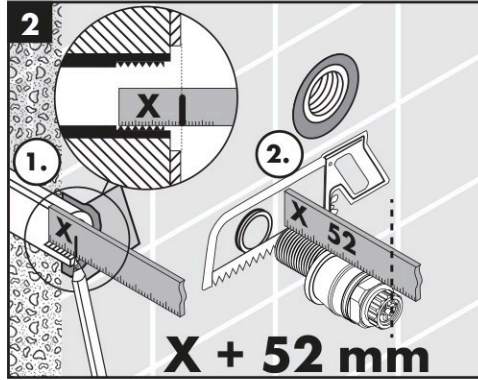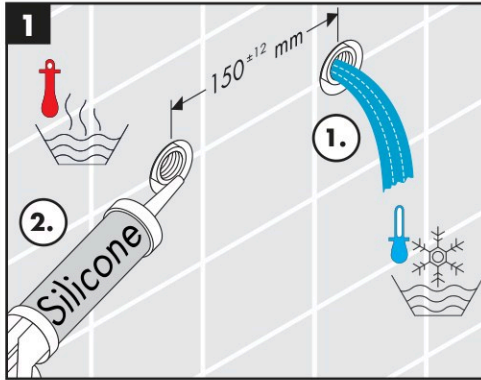


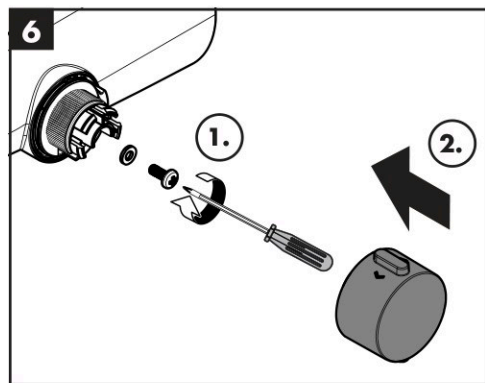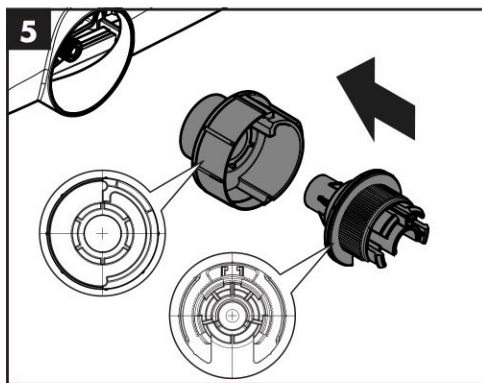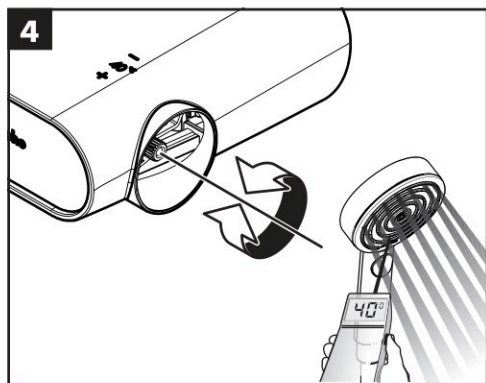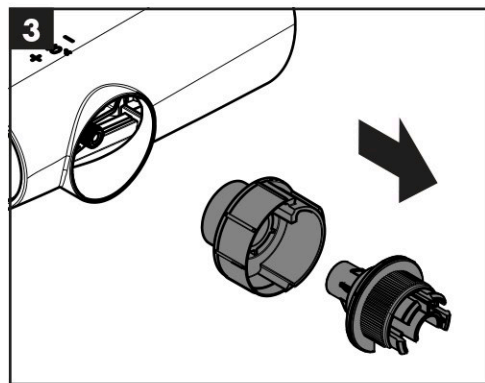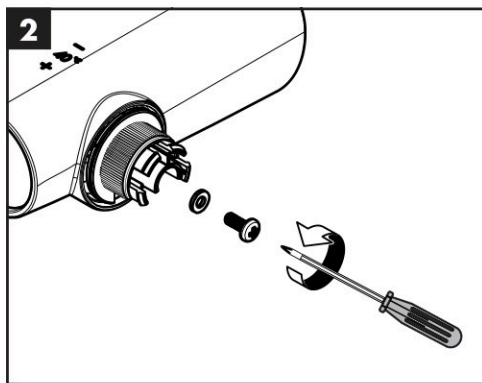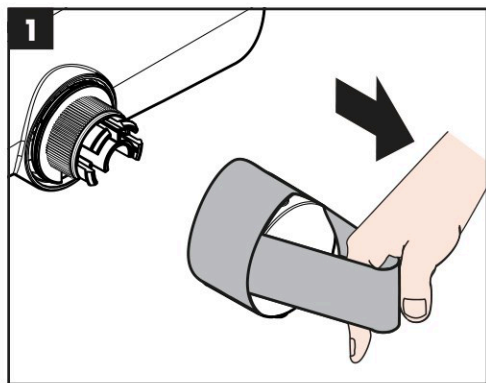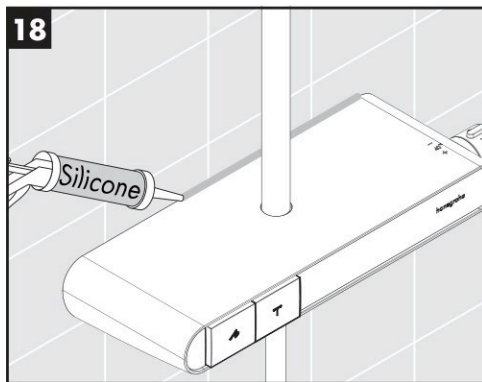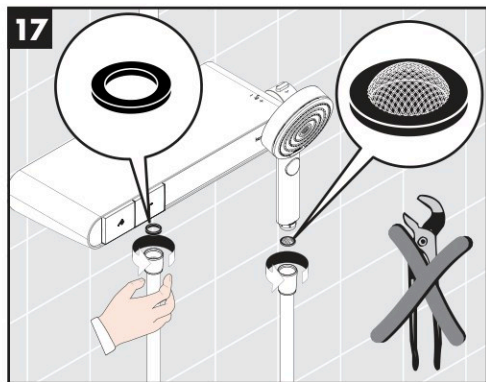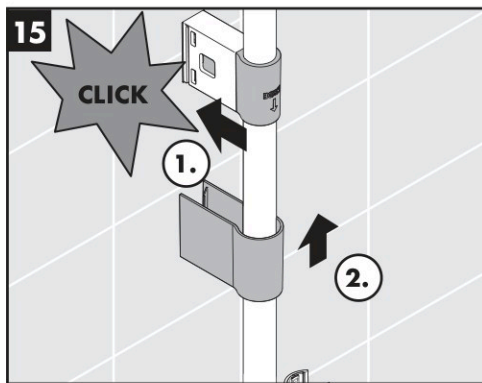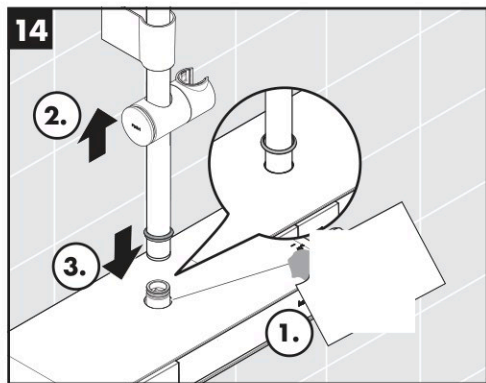

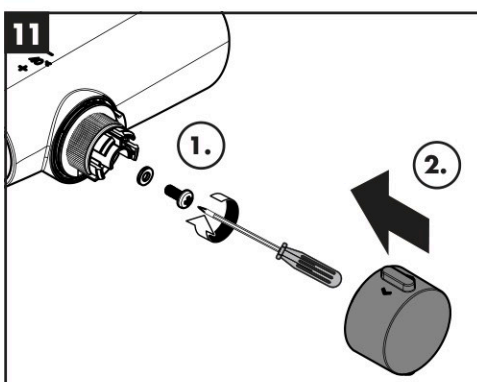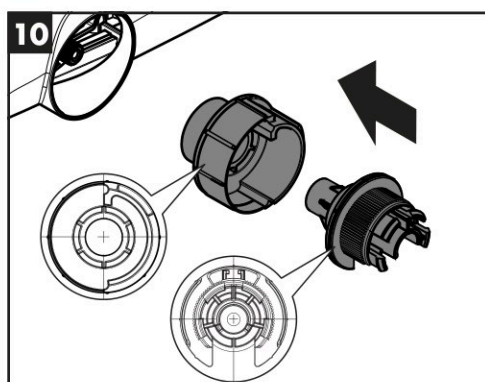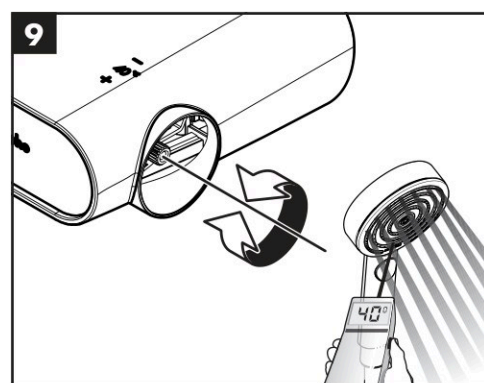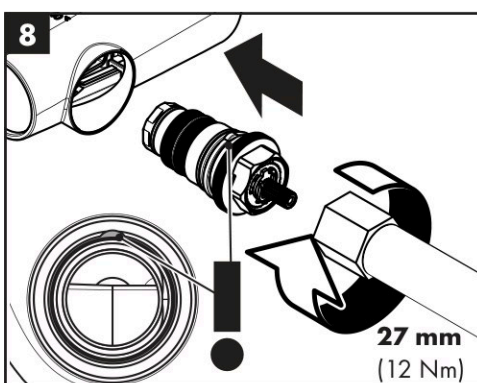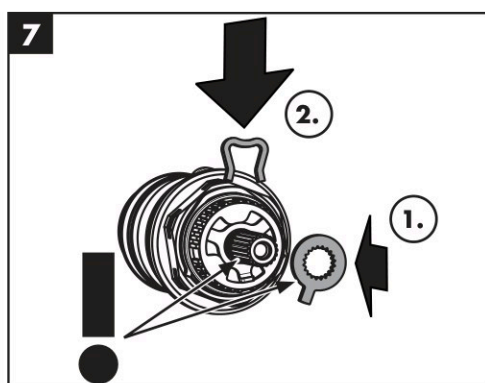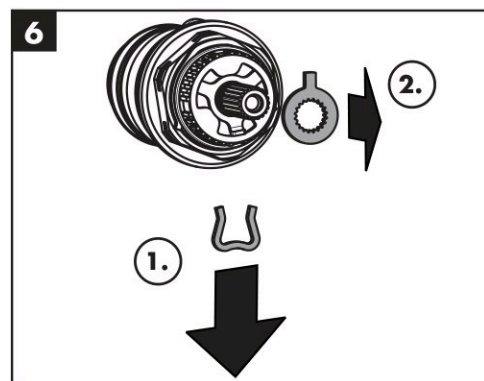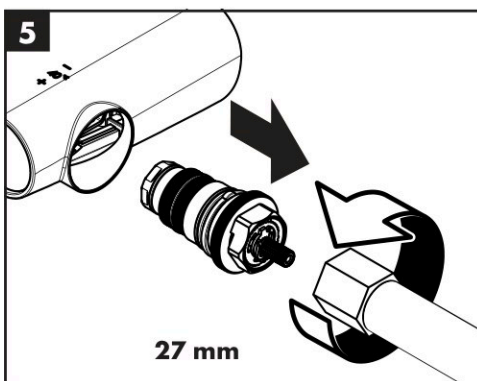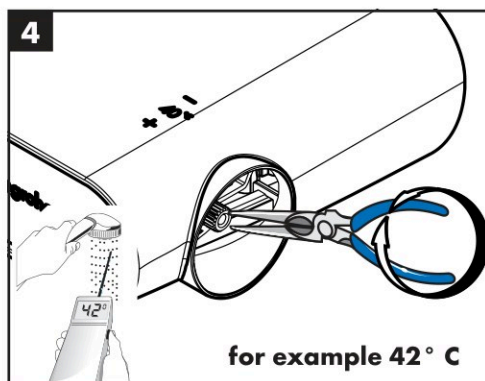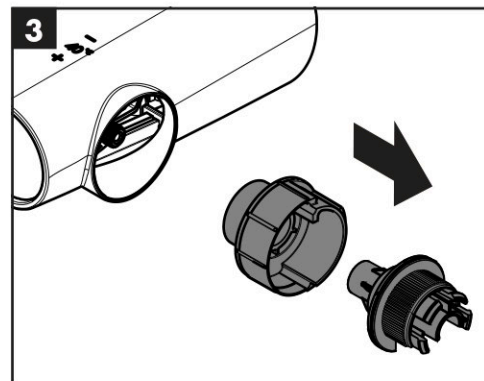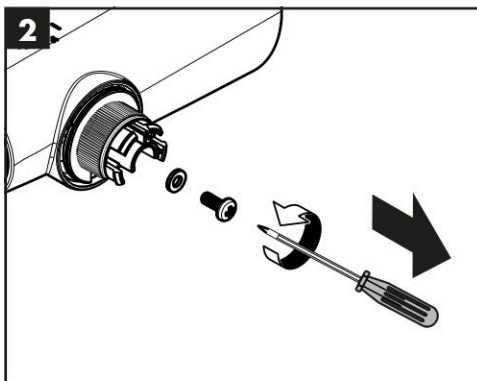
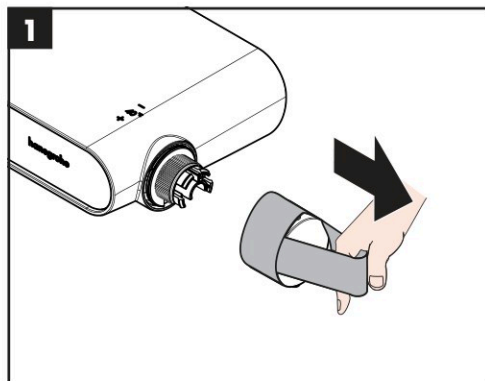


Activera Q Showerpipe 290/180 1jet EcoSmart ShowerTablet Select 360 Varia 28648XX0


Activera Q Showerpipe 290/180 1jet EcoSmart+ ShowerTablet Select 360 Varia 28649XX0

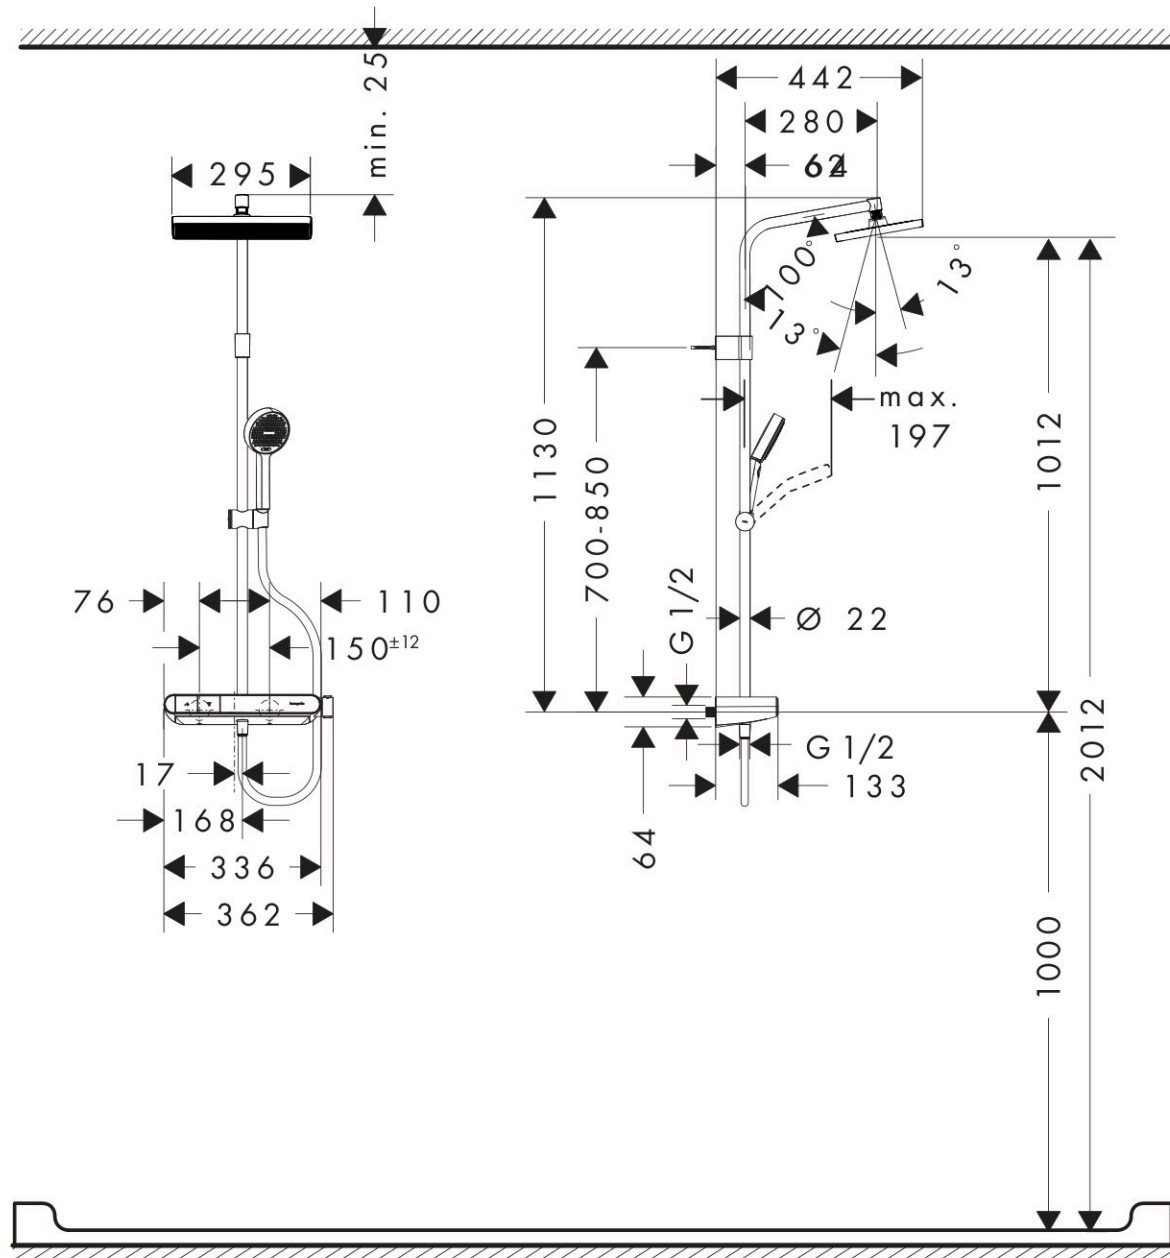

Activera Q Showerpipe 290/180 1jet EcoSmart ShowerTablet Select 360 Varia
28648XX0

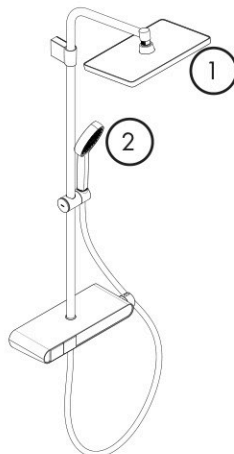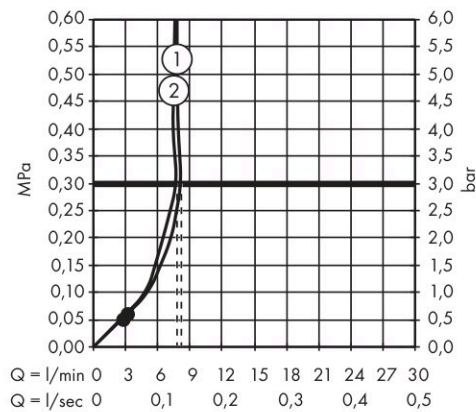

Activera Q Showerpipe 290/180 1jet EcoSmart+ ShowerTablet Select 360 Varia
28649XX0

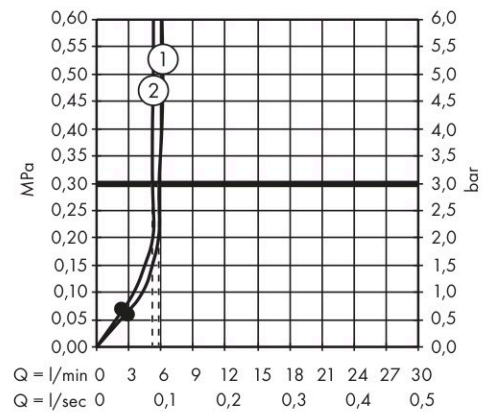

Cleaning and care

English content from original page 38

QuickClean / QuickClean+

Just clean: simply rub over the spray nozzles to remove lime scale.

Cleaning recommendation / Warranty / Contact

<https://www.hansgrohe.com/cleaning-recommendation>

<https://www.hansgrohe.com/warranty>

<https://www.hansgrohe.com>

Manufacturer contact

Hansgrohe SE












Klaus-Grohe-Str. 5 - 9, D-77761 Schiltach











Telephone: +49 (0) 7836/51-1282

Fax: +49 (0) 7836/511440

Email: info@hansgrohe.com


See the following page for the manufacturer cleaning diagrams.

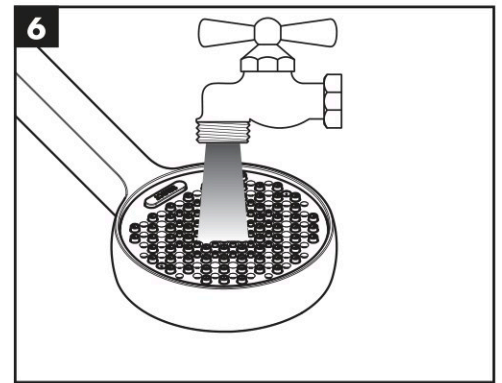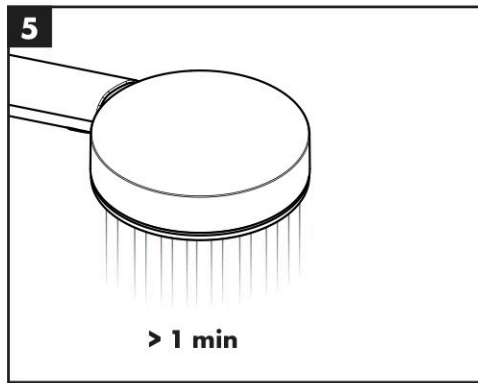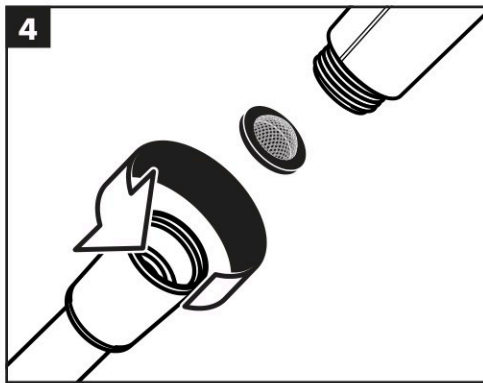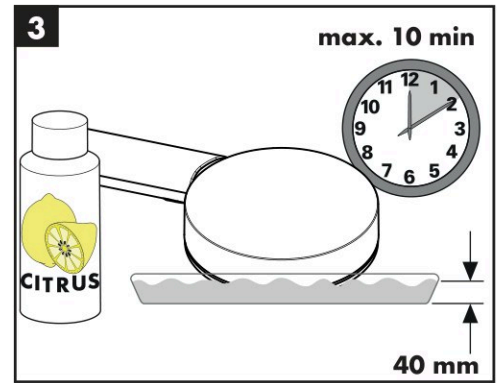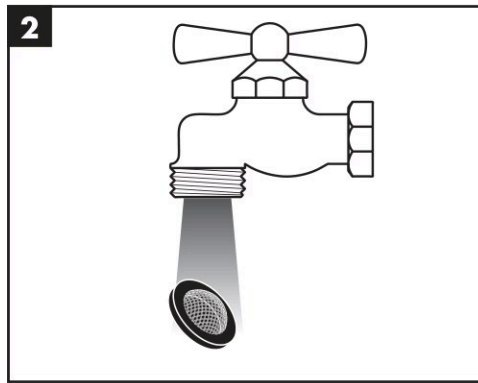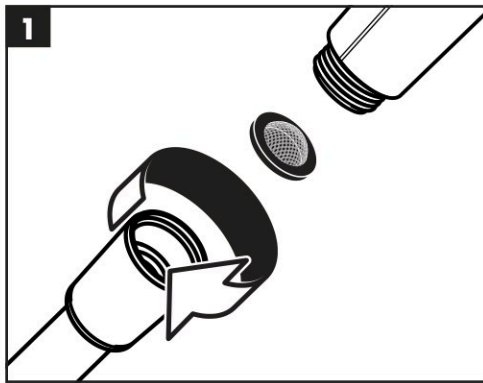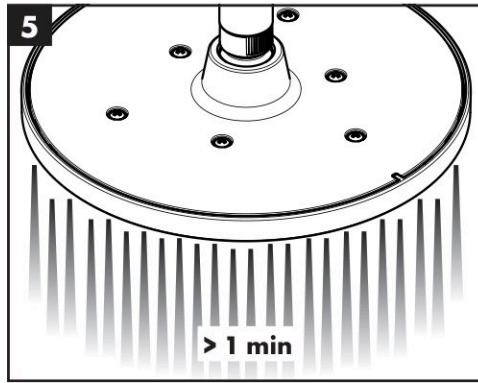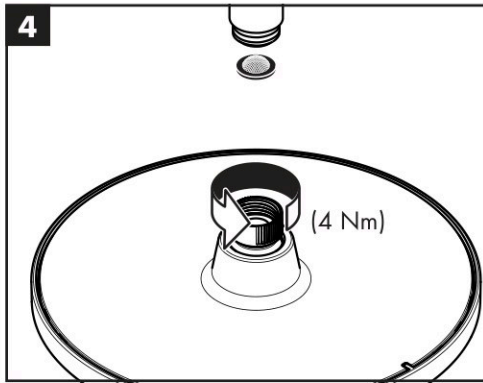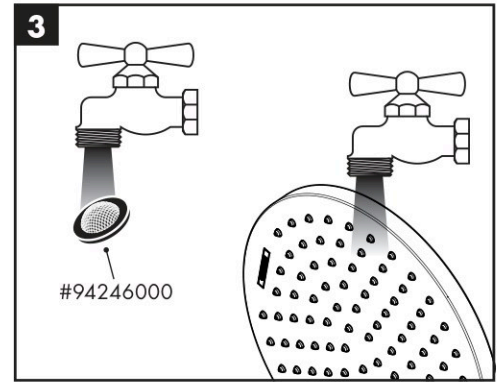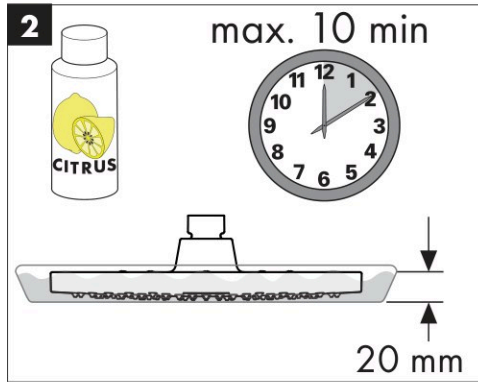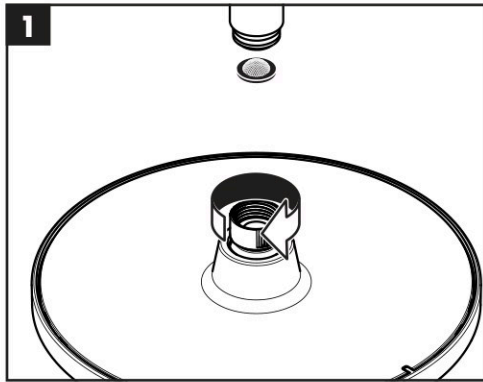

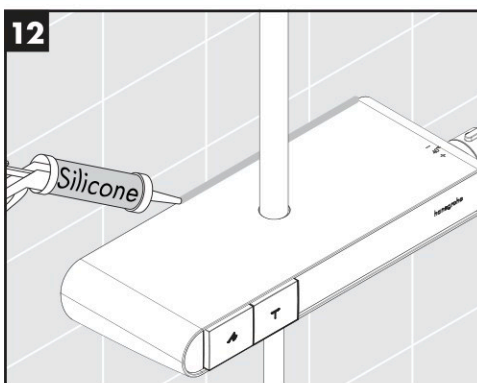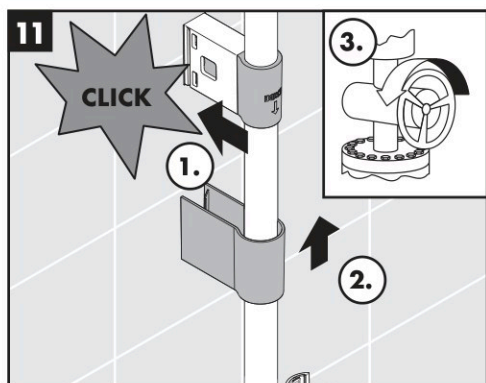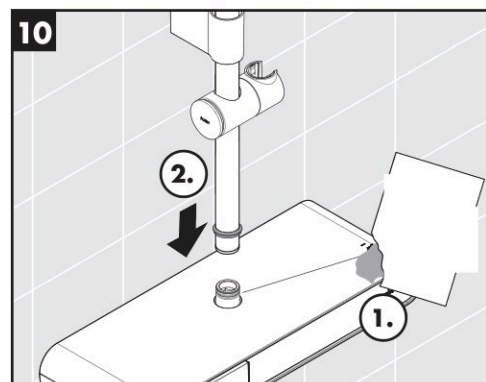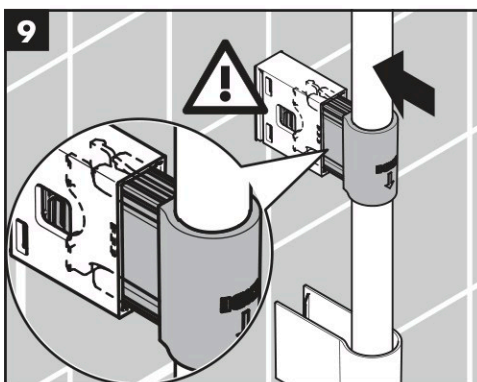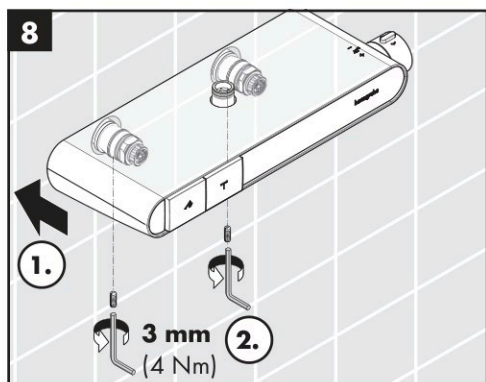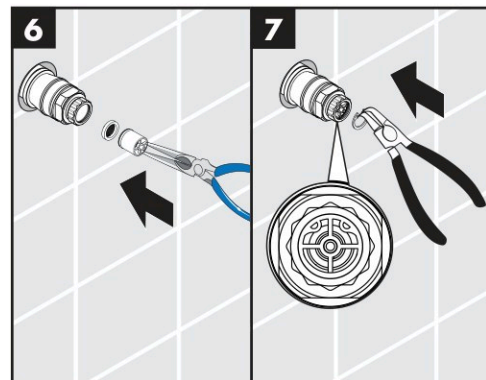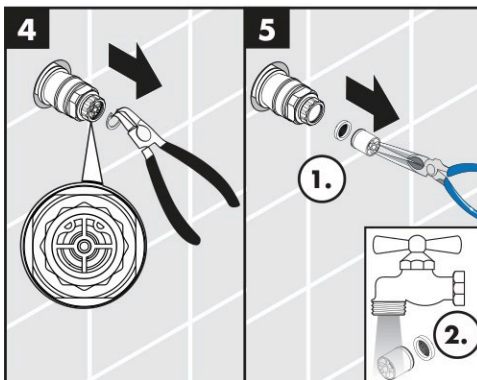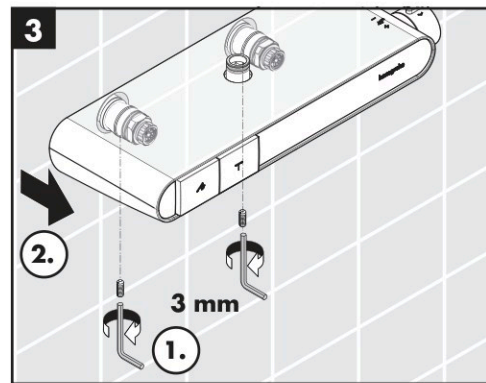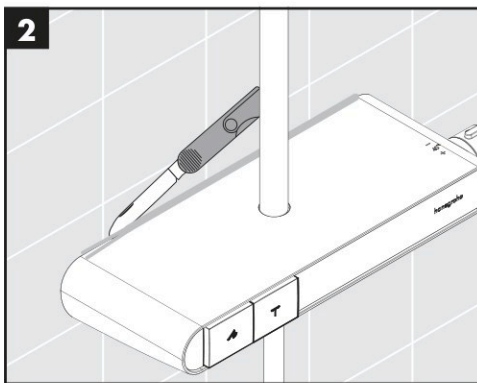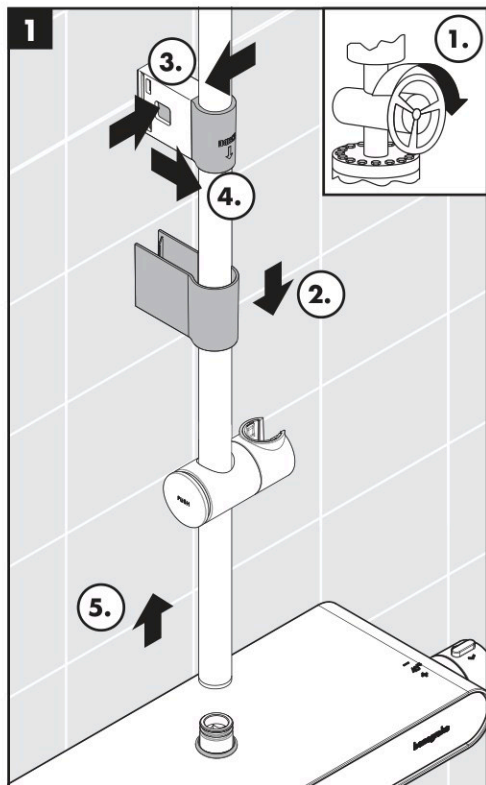

Activera S Showerpipe 240 1jet EcoSmart
ShowerTablet Select 360 Varia
 28638XX0

Activera S Showerpipe 240 1jet EcoSmart+
ShowerTablet Select 360 Varia
 28639XX0

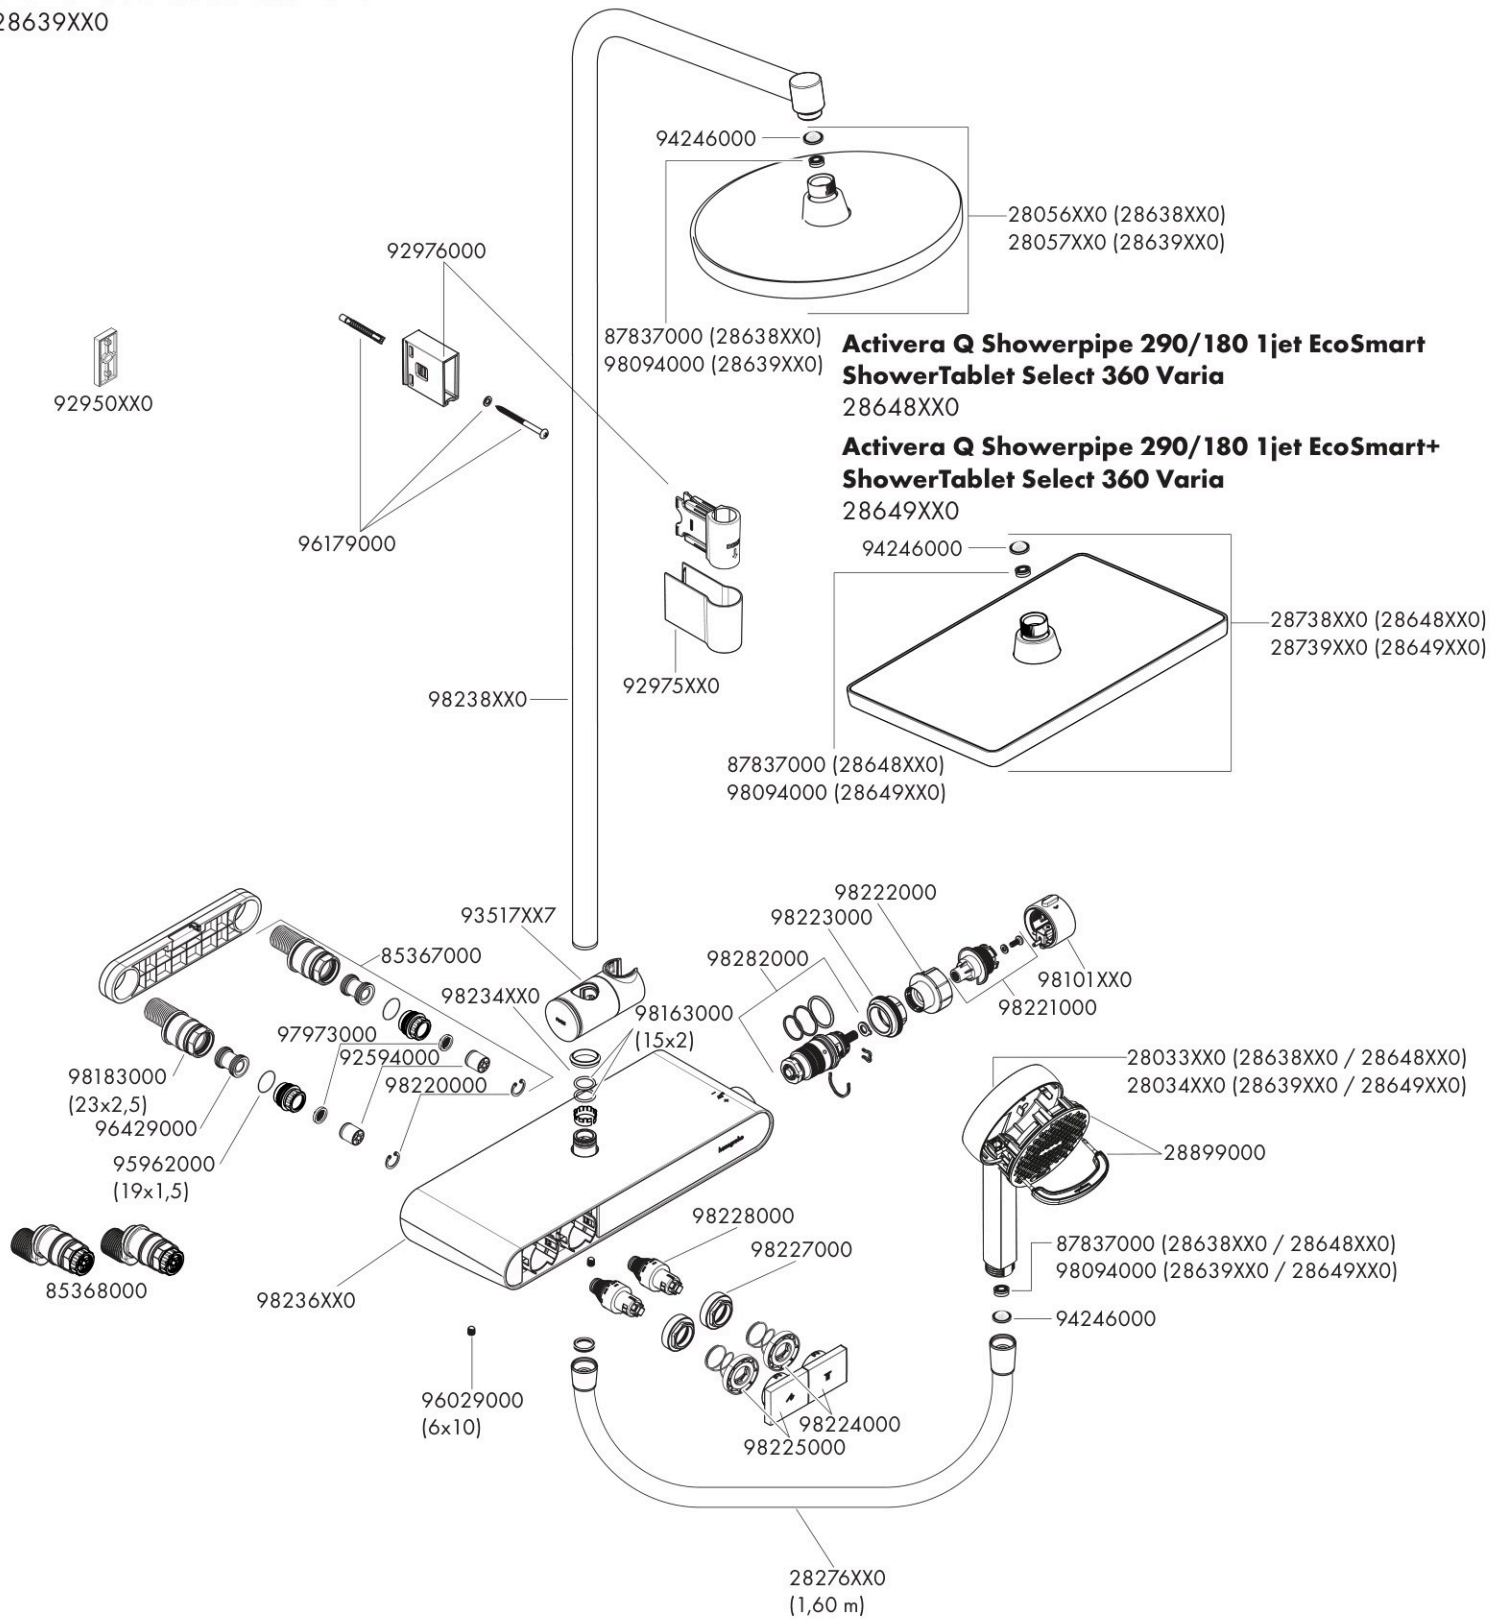



P-IX

DVGW



ETA

28638XX0	PA-IX 39106/IIBO
28639XX0	PA-IX 39107/IIBO
28648XX0	PA-IX 39108/IIBO
28649XX0	PA-IX 39109/IIBO

