


UIF 9.3F LB X

12NC: F159104

GTIN (EAN) code: 5054645591046

Hotpoint

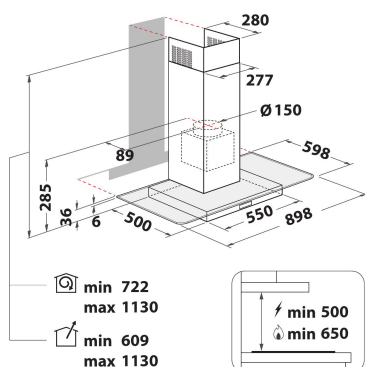

min 722
max 1130
min 609
max 1130

min 500
min 650

MAIN FEATURES

Product group	Hood
Colour body	Inox
Material body	Stainless steel
Colour chimney	Inox
Material chimney	N/A
Typology	Island/Ceiling
Installation type	Island/Ceiling
Type of control	Electronic
Type of control settings	-
Decor panel options	N/A
Motor location	Integrated motor in hood body
Operating Mode	Convertible
Electrical connection rating (W)	255
Current (A)	1,1
Voltage (V)	220-240
Frequency (Hz)	50
Length of electrical supply cord (cm)	150
Plug type	No
Chimney height (mm)	-
Height of product, without chimney (mm)	0
Height of the product	690
Width of the product	898
Depth of the product	451
Minimum niche height	0
Minimum niche width	0
Niche depth	0
Net weight (kg)	17.2

TECHNICAL FEATURES

Type of manual control devices	Buttons
Type of automatic control devices	-
Number of motors	1
Total power of the motors (W)	250
Number of speed settings: boost option availability	4
Boost presence	Yes
Maximum output air extraction (m ³ /h)	647
Boost position air extraction (m ³ /h)	735
Maximum output recirculating air (m ³ /h)	336
Boost position output recirculating (m ³ /h)	352
Light Control Type	On/Off
Number of lights	2
Type of lamps used	LED
Total power of the lamps (W)	0
Diameter of air outlet (mm)	150
No-return airflow flap	Yes
Grease filter material	Washable aluminium
Odour filter	Yes

PERFORMANCES

Sound power at min. speed (2010/30/EU)	56
Sound power at max. speed (2010/30/EU)	70
Noise level with boost position (dB(A) re 1 pW)	72