

PRODUCT SPEC SHEET



DESIGNED & MADE IN ITALY

NeoChiller

SHOWROOM
COLLECTION



Enjoy cool, pure drinking water without the fuss.

NeoChiller is a compact filter and chiller unit that fits neatly beneath your worktop and connects to several of our taps. It filters water from the mains supply, removing impurities to ensure a fresh, pure taste. And it cools the water to the perfect drinking temperature, straight from the tap.

With NeoChiller there's no messing around with filter jugs, no lugging bottles of water home from the shops and no plastic waste. It's better for you, and better for the environment.


FEATURES

- Small, compact domestic chiller unit
- Designed for easy installation under the kitchen sink
- Dispenses up to 7 litres per hour of cold, still water between 3°C and 10°C
- Filtered to remove impurities and odours, without affecting the water's natural mineral content
- CE approved
- Ice-bank cooling technology for optimum performance
- Compatible with the InSinkErator® 4N1 Touch, HC1100, C1100, FHC3010 and FHC3020 models



NeoChiller

Dimensions

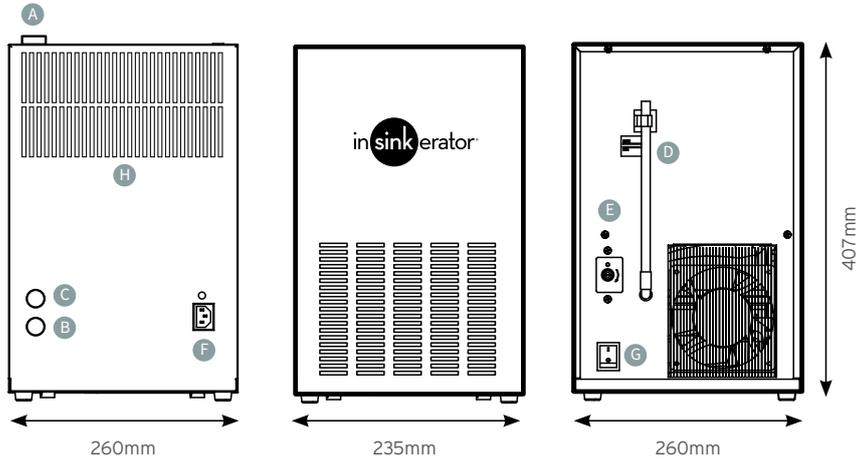


Unit overview

- A. Cold water outlet
- B. Cold water inlet
- C. Ice bank fill
- D. Level pipe of ice bank
- E. Thermostat
- F. IEC connector for power cord
- G. On/off switch
- H. Fan grilles

Regional variants

| | | |
|--------------|-----------------------------|------------|
| 050375023814 | CWT150-1, UK Chiller 230/50 | 45528-ISE |
| 050375023821 | CWT150-2, EU Chiller 230/50 | 45528A-ISE |

Placement guide

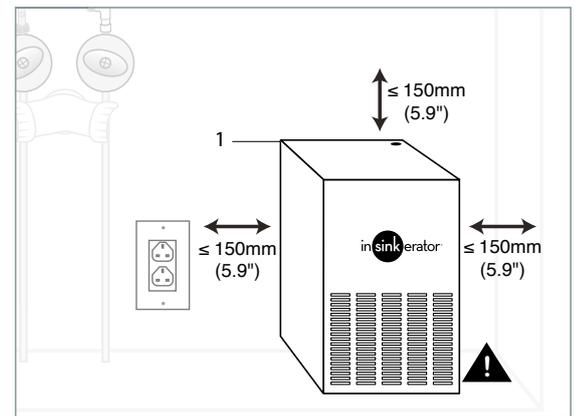

Specifications

| | |
|----------------------------------|--|
| Model CWT150 | Rated input 155W |
| Cooling performance | 7L/hr 3L continuously |
| Dispensed cold water temperature | 3-10°C with 20°C incoming water and 25°C room temperature |
| Dispensing | 40 sec/L |
| Condensation | Ventilated blowing |
| Thermostat | Mechanical |
| Compressor | 1/12HP |
| Ice bank | 2L capacity, 1kg of ice |
| Inlets/outlets | Water inlet $\text{\O}6.35\text{mm}$ (or $\frac{1}{4}$ "), water outlets $\text{\O}6.35\text{mm}$ (or $\frac{1}{4}$ ") |
| Filter | Not included. |
| Max quantity for pallet | 18 |
| Pallet dimensions | WxDxH 120x80x160cm |



The maximum pressure of water entering the NeoChiller must not be more than 3 Bar/43.5psi.



InSinkErator®. Suite 10, Building 6, Hatters Lane, Croxley Park, Watford, Herts WD18 8YH. United Kingdom

Sales tel: 01923 297 880
Service tel: 0800 389 3715
insinkerator.co.uk

InSinkErator® may make improvements and/or changes in the specifications at any time, in its sole discretion, without notice or obligation and further reserves the right to change or discontinue models. © 2020 InSinkErator®, InSinkErator® is a business unit of Emerson Electric Co. All Rights Reserved.



Check out our full range of Kitchen Products

Kitchen Sinks

Stainless Steel Kitchen Sinks

Granite Composite Kitchen Sinks

Glass Kitchen Sinks

Ceramic Kitchen Sinks

Franke Kitchen Sinks

Kitchen Taps

Contemporary Kitchen Taps

Traditional Kitchen Taps

Franke Kitchen Taps

Pull out Rinser Kitchen Taps

Instant Boiling Water Taps

Insinkerator Waste Disposal Units

plumbworld
Big brands, small prices.