
## F(1

## **DKB5960HM Cooker Hood**



as a stand alone unit

· Installation : Chimney •Recirculation or extraction options •Size : 90 •For wall mounting between furniture or •Dimensions, HxWxD : 665-1175x898x500 •Minimum distance from cooking top : 50 •Minimum distance from cooking top : 65 •Cord Length : 1.5 •Voltage : 220-240 •Required Fuse : 4 •Frequency : 50 •Colour : Stainless steel •Charcoal filter type : MCFE01 •Other comments technical specifications : SilenceTech model (max speed not higher then 54 dBa) IT IS POSSIBLE TO INSTALL ALSO LONG LIFE FILTER -> TYPE20 942 121 993 IN RECIRCULATION: Height min.-max. external, mm 730-1175mm •Superperforming charcoal filter compatible : SUPCHARCE2, 902 980 093 •Energy class : A •Fluid dynamic efficiency class : A •Lighting efficiency class : A •Grease filter efficiency class : C Capacity minimum, m3/h : 175 ·Capacity, Max m3/h : 352 Capacity intensive, m3/h : 779 •Sound power min speed, dB(A) : 38 •Sound power max speed, dB(A) : 55 Sound power intensive, dB(A): 73 •No. of speed settings : 3+Intensive, Breeze function, SilenceTech Range •Lamp type : LED •No. of lamps : 2 •Grease filters : 2 Chimney denomination : n/a •Recirc sound power min, dB(A): 44 •Recirc sound power max, dB(A): 62 •Recirculation min, m3/h : 127 •Recirculation max, m3/h : 302

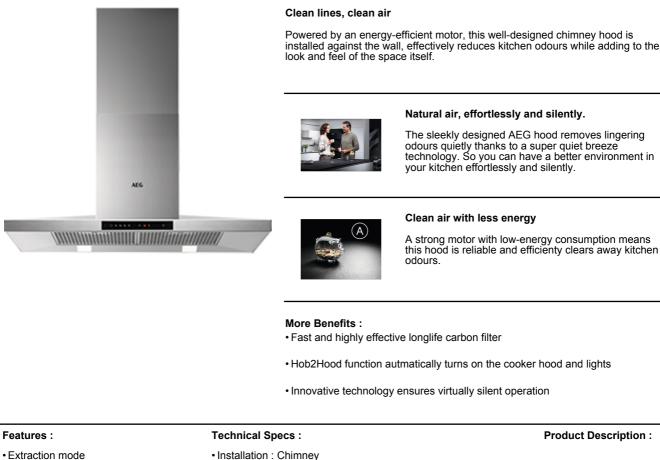

## DKB5960HM Cooker Hood

