

**Serie | 4, Built-in double oven,  
Stainless steel  
NBS533BS0B**



**Included accessories**

2 x combination grid  
1 x universal pan  
2 x Universal pan  
slim size

**Optional accessories**

HEZ531000 : Baking tray, grey enamelled  
HEZ531010 : Baking tray, non-stick ceramic coated  
HEZ634000 : Baking and roasting grid (standard)  
HEZ915003 : Glass roasting dish, 5,4 L

**The built-in double compact oven with 3D hot air: achieve perfect baking and roasting results on multiple levels simultaneously.**

- **3D Hotair:** perfect results thanks to optimal distribution of heat on up to 3 levels simultaneously.
- **LED display control, red:** easy-to-use thanks to the time functions.
- **EcoClean Direct:** almost no cleaning is necessary thanks to a special coating of the rear wall that automatically absorbs grime.
- **Slim Universal Pans:** 2 universal pans, slim size; optimised for smaller dishes

**Technical Data**

Color / Material Front :	Stainless steel
Construction type :	Built-in
Integrated Cleaning system :	No
Dimensions of the product (mm) :	717 x 594 x 550
Dimensions of the packed product (HxWxD) (mm) :	790 x 695 x 660
Control Panel Material :	Stainless steel
Door Material :	Glass
Net weight (kg) :	47.728
Usable volume of cavity (l) :	47
Cooking method :	Conventional
heat, Full width grill, Hot Air, Hotair gentle, Hot air grilling	
Temperature control :	No control of the temperature
Number of interior lights :	1
Approval certificates :	CE, VDE
EAN code :	4242005034628
Energy efficiency class (2010/30/EC) :	A
Energy consumption per cycle conventional (2010/30/EC) :	0.84
Energy consumption per cycle forced air convection (2010/30/EC) :	0.71
Energy efficiency class (2010/30/EC) - cavity 2 :	B
Energy consumption per cycle conventional - cavity 2 (2010/30/EC) :	0.83
Energy efficiency index (2010/30/EC) :	94.7
Energy efficiency index cavity 2 (2010/30/EC) :	120.3
Electrical connection rating (W) :	5300
Current (A) :	25
Voltage (V) :	220-240
Frequency (Hz) :	50
Plug type :	fixed connection, no plug



4 242005 034628

## **Serie | 4, Built-in double oven, Stainless steel NBS533BS0B**

**The built-in double compact oven with 3D hot air: achieve perfect baking and roasting results on multiple levels simultaneously.**

### **Design**

- LED-Display Control (Red)
- Straight bar handle
- Retractable control dials, Rotary dial

### **Main Lower oven**

- Cavity volume: 47 litre capacity
- Smooth enamelled oven interior, Removable wire shelf support rails
- Halogen interior light

### **Cleaning**

- EcoClean Direct : back panel
- Full glass inner door

### **Programmes/functions**

- Oven with 5 heating methods: 3D hot air, conventional top and bottom heat, Hotair grilling, full width variable grill, Hotair gentle
- Fast pre-heating function

### **Secondary top oven**

- Cavity volume: 34 litre capacity
- Smooth enamelled oven interior, Removable wire shelf support rails
- Halogen interior light

### **Programmes/functions**

- Oven with 3 heating methods: conventional top/bottom heat, Large-area grill, Small area grill

### **Cleaning**

- Full glass inner door


### **Accessories**

- 2 x combination grid, 1 x universal pan, 2 x Universal pan, slim size

### **Performance/technical information**

- Energy efficiency rating (acc. EU Nr. 65/2014): A  
Energy consumption per cycle in conventional mode: 0.84 kwh  
Energy consumption per cycle in fan-forced convection mode: 0.71 kwh  
Number of cavities: Main cavity  
Heat source: electrical  
Cavity volume: 47 litre capacity
- Energy efficiency rating (acc. EU Nr. 65/2014): B  
Energy consumption per cycle conventional mode: 0.83 kwh  
Number of cavities: Top Cavity  
Heat source: electrical  
Cavity volume: 34 litre capacity
- Nominal voltage: 220 - 240 V
- Appliance dimension (h x w x d): 717 mm x 594 mm x 550 mm
- Please refer to the dimensions provided in the installation manual

## Serie | 4, Built-in double oven, Stainless steel NBS533BS0B

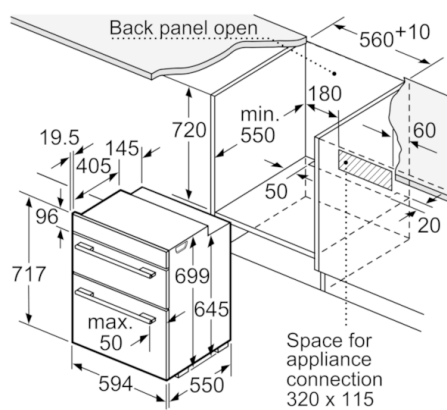


measurements in mm

measurements in mm

If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	39	40
Full-surface induction hob	49	50
Gas hob	29	40
Electric hob	29	32

measurements in mm  
Installation with a hob



A: Recessed depth 29-50 mm.  
See hob dimensional drawing.  
B: Min. distance:  
Induction hob: 5 mm  
Gas hob: 5 mm  
Electric hob: 2 mm

measurements in mm

