



A

The NEW Redring Selectronic Advanced thermostatic shower is a redesigned, high quality electric shower designed as an inclusive shower for the whole family. It offers easy to use controls with precise temperature control and energy efficiency. Available with standard accessories or in the **PLUS** version with extended rail and 2 meter hose.

Key Features


- BEAB Care Highly accurate, temperature control to $\pm 0.5^{\circ}\text{C}$ for a safe and comfortable showering experience
- Push button controls with audible adjustment confirmation for ease of operation
- Large LED digital temperature display
- Phased shutdown safety protection for next user providing cool start up and scale protection
- Maximum temperature lock limiter options of 41°C and 43°C Selectable on installation
- Simple push button rapid commissioning
- Integrated 2-wire waste pump control
- SmartFit™ technology makes installation easy, thanks to multi-entry left right options for power and water
- 5 spray mode shower head with easy rub-clean nozzles
- Temperature over ride facility for the whole family
- **PLUS Version c/w 2mtr anti-kink flexible shower hose, 1mtr riser rail, 5 mode handset, soap dish and hose retainer**

STANDARD version c/w 1mtr anti-kink flexible shower hose, 600mm riser rail, 5 mode handset, soap dish and hose retainer

Product Range

Item Code:	Model No:	Description	kW
R110085	*RSELA85P	Selectronic Advanced PLUS	8.5
R110092	*RSELA95P	Selectronic Advanced PLUS	9.5
R110054	RSELA85S	Selectronic Advanced STANDARD	8.5
R110061	RSELA95S	Selectronic Advanced STANDARD	9.5

Dimensions

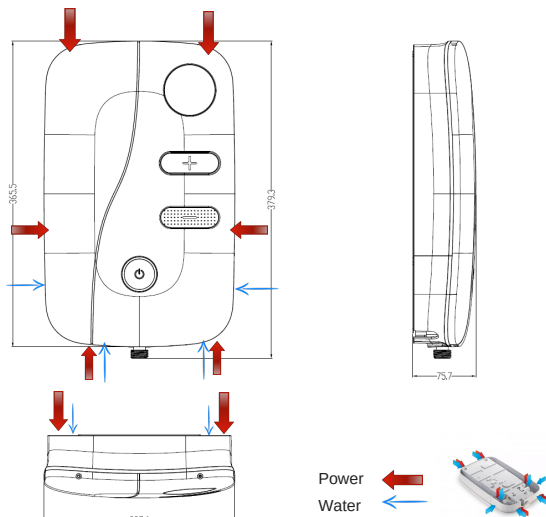

Technical Details

Model	*RSELA85P	*RSELA95P	RSELA85S / RSELA95S
Item Code	R110085	R110092	R110054 / R110061
EAN /Bar Code No.	5056784523933	5056784523940	5056784523919 / 5056784523926
Output (kW)	8.5	9.5	8.5 & 9.5
Current Rating (Amps)	36	40	36 / 40
Energy Rating (Class)	A	A	A
Energy Rating (%)	37	37	37
Consumption (kWh/A)	495	552	495 & 552
Load Profile	XS	XS	XS
Sound (dB)	15	15	15
Running Pressure	0.5 to 10 bar		
Temp. Control Accuracy	$\pm 0.5^{\circ}\text{C}$		
Start-up Temperatures	41°C or 43°C		
Temperature Range	30 - 47°C		
IP Rating	IPX4		
Approvals / Mark	BEAB, BEAB CARE, WRAS, RNIB & CE		
UK Warranty (years)	5*		
Shower dimensions (mm)	H.368, W 227, D 68		
Gross weight (kg)	TBC		
Net weight (kg)	TBC		
Full pallet quantity	TBC		
Showers per layer	TBC		



*Subject to product registration within 30 days.

