


# NARVA

## 4R1149 – HORIZONTAL SPOUT - TWIN HANDLE

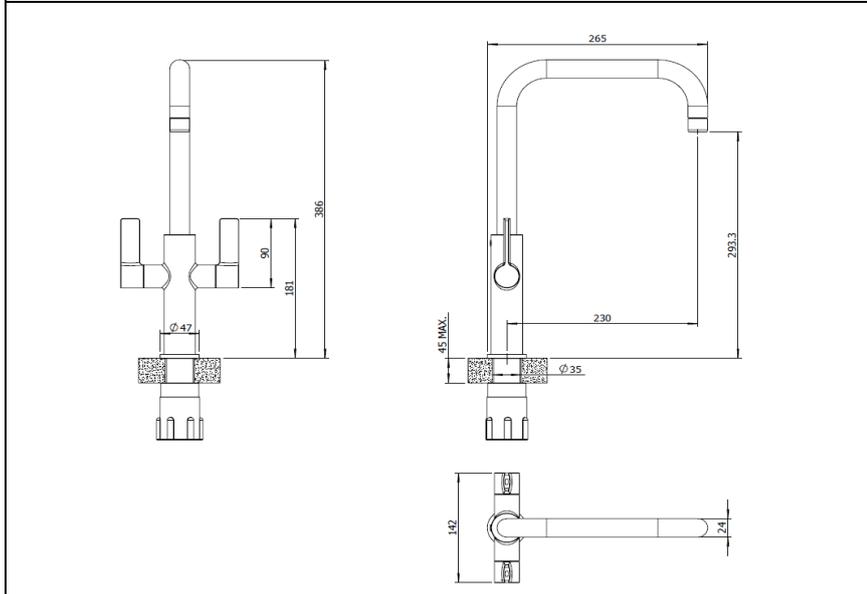

Specification	
Finish	Chrome Plate
Body	Brass
Fittings	Easy fix system
Connection	M10 – DN8 flexible hoses with 1/2" BSP threaded ends
Min dynamic pressure	0.1
Max dynamic pressure	6
Max static pressure	16
Max water temperature	60°C


Flow rates				
Pressure	0.1	0.5	1	3
L/min	0.7	10.9	17	29.2

All Pressures are in Bar.  
 Dimensions supplied are nominal and subject to tolerance.  
 Inclusion of aerator (if supplied) or restrictors (sold separately) will affect flow rate result.  
 Performance details are based on trials under test conditions and for guidance only.  
 The Company reserves the right to change product specification without prior notice.

### Features & Benefits

 Guarantee	 Low Pressure	 Flexible Hose	 Flow Straightener
 Flow Aerator	 Single Flow	 Easy Fix	 Superfix

### Certifications

	
<i>Tested at 0.2 bar</i>	

Guarantee covers manufacturing or material defects but does not cover parts subject to normal wear and tear after an initial 12 month period. Guarantee does not affect any statutory rights the consumer may have in law.

Units 1-4 Radnor Park Trading Estate. Back Lane. Congleton. Cheshire.  
 CW12 4JX. England. Tel 01260 28 00 33. sales@reginox.co.uk