


Sanicompact



PRODUCT BENEFITS

- Ultra-compact toilet with built-in macerator*
- Has a depth of just 430 mm
- Able to add a wash basin to this small WC for a cloakroom
- Flow rate >100 l/min and requires a minimum dynamic pressure of 1.7 bar water supply

*Due to the compact nature of this unit it may activate during use.

CONNECTIONS

← Discharge diameter ext. : 32 mm

→ External inlet diameter : 40 mm



Multi-cutter disc




TECHNICAL FEATURES

Number of inlets	1
External inlet diameter	40 mm
Discharge diameter ext.	32 mm
Max. incoming temperature	35°C
Flush volume	1.8/3 L
Voltage / Frequency	220-240 V / 50-60 Hz
Motor power	550 W
IP Rating	IP44
Electrical class	I
Noise level	51 dB(A)
Identification and logistics	
Gross weight	25 kg
EAN code	3308815025346
Product code	1081

PACK CONTAINS

Sanicompact, non-return valve, floor fixings

CURVE

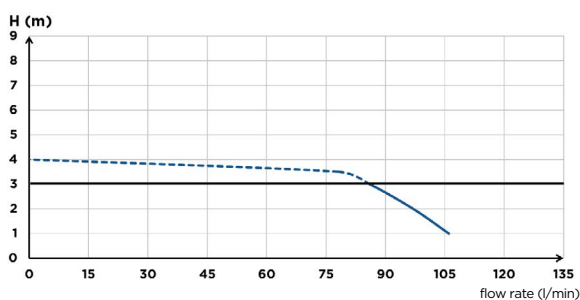

— recommended max height: 3 m

DIMENSIONS

