





EN • Connection

EN • Technical installation information
1-2 : Compulsory air intake on the inlet


Option 1



Option 2

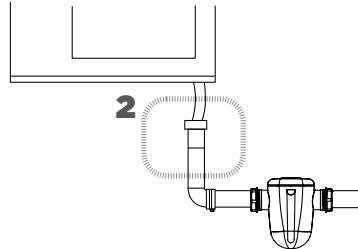

EN • Maintenance

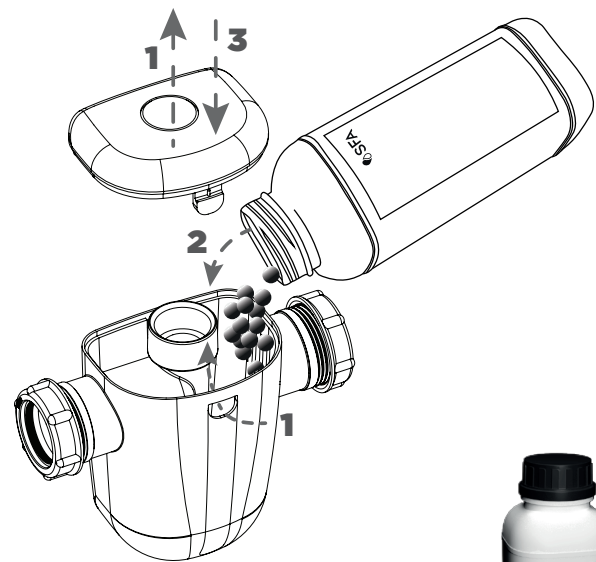

EN • Neutralising granule refill 1,2 kg




EN • Regularly monitor the condition of the granules. The level of the granules has to be above the minimum level as indicated on the product label. Renew them (400 g) and clean the neutralisation box out once a year.

EN • Guarantee

EN • Sanineutral mini is guaranteed for two years from the date of purchase subject to installation, use and maintenance in accordance with this manual.

NOT148
09.2023

Sanineutral mini



EN INSTALLATION AND OPERATING MANUAL





EN • Keep out of reach of children
Do not swallow the granules and
in the event of contact with skin
or eyes, rinse with plenty of
water. If product is ingested then
seek medical advice.

EN • Technical data


Maximum incoming temperature	60 °C
Max. power of boiler	25 kW
Connection diameter	32 mm
Net weight	0,8 kg
Load	0,4 kg

EN • EN 12056-1


The acid condensate from a condensing boiler must be drained using pipework which can withstand waste water with a pH of lower than 6.5. Please refer to any relevant National or Regional legislation that outlines the pretreatment of condensate.

EN • Description

EN • Dimensions

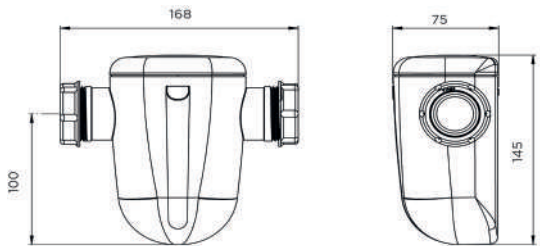

EN • Scope of supply

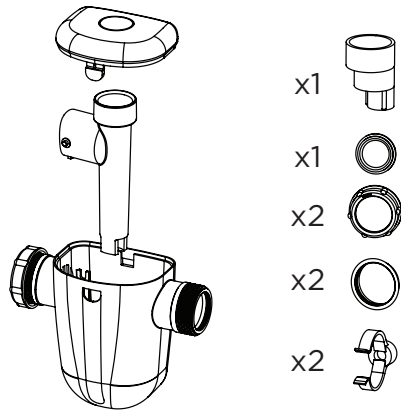

EN • Installation

EN • Mounting on the wall

