

Sanishower Flat



3 m
30 m



See page 10

PRODUCT BENEFITS

- Pump and waste for low level shower tray (80 mm)
- Small pump for discreet installation
- Low level waste compatible with most shower trays

CONNECTIONS

- ← Discharge diameter ext. : 22/32 mm
- External inlet diameter : 32 (shower), 40 (sink) mm




PACK CONTAINS

Sanishower Flat, waste, non-return valve, connectors

TECHNICAL FEATURES

Number of inlets	2
External inlet diameter	32 (shower), 40 (sink) mm
Discharge diameter ext.	22/32 mm
Max. incoming temperature	35°C
Min. shower tray height	80 mm
Activation level	30 mm
Voltage / Frequency	220-240 V / 50-60 Hz
Motor power	250 W
IP Rating	IP44
Electrical class	I
Identification and logistics	
Gross weight	5 kg
EAN code	3308815061016
Product code	1043/3

CURVE

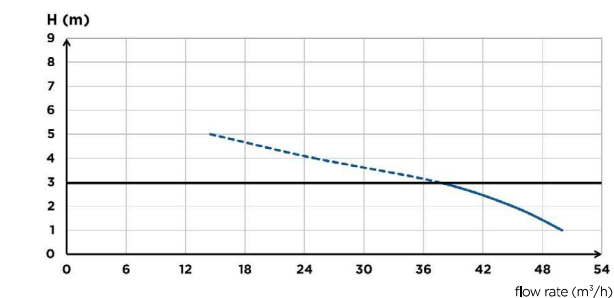

— recommended max height: 3 m

DIMENSIONS

