

# T80Z Fast-Fit DuElec™

Electric Shower



## Product Codes

|                                |          |
|--------------------------------|----------|
| T80Z Fast-Fit DuElec™ - 9.5kW  | GEFFDU91 |
| T80Z Fast-Fit DuElec™ - 10.5kW | GEFFDU11 |

## Installation

- Inlet connection: 15mm diameter
- Outlet connection: 1/2" BSP male thread
- Generous footprint will cover the original T80Z Fast-Fit as well as most competitor models
- 8 water and 6 cable entry points
- Easy pipe connection either left or right, 15mm compression fitting
- Wire free cover fit
- Easy fit entry trims which can be installed with the shower in situ, no tools required
- Swing-Fit™ for left and right-hand side cable connections
- Swivel Fit™ for left and right-hand side water connections

## Commissioning

- Simple 2 minute commissioning process

## End User

- Choice of showering experience - Divert water between a 5 spray pattern shower head and luxurious fixed rainfall shower head, or even use both together
- Separate flow and temperature controls
- Push-Button Start/Stop – Retains your preferred power and temperature setting
- Easy Clean 5 spray pattern shower head with removable spray plate
- 1.25m Anti-Twist Hose – Designed to avoid kinks
- Efficient A energy rating



# T80Z Fast-Fit DuElec™

## Electric Shower

### Shower

|                               |                                                                                                               |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|
| Temperature stability         | Stabilised                                                                                                    |
| Power ratings                 | 9.5kW, 10.5kW (240v)                                                                                          |
| Finish                        | White                                                                                                         |
| Controls                      | Start/stop button & temperature control dial                                                                  |
| Visual indicators             | Power-on/low pressure indicator                                                                               |
| Inlet Connection              | 15mm compression                                                                                              |
| Water Entry Points            | Top, bottom, side bottom, back (left hand side unit)<br>Top, bottom, side bottom, back (right hand side unit) |
| Cable Entry Points            | Top, bottom, back (left hand side unit)<br>Top, bottom, back (right hand side unit)                           |
| Outlet Connection             | ½" BSP                                                                                                        |
| Plumbing System Compatibility | Cold mains only                                                                                               |
| Minimum Running Pressure/Flow | 1 bar at 8l/min<br>1.5 bar at 11l/min for 10.5kW*                                                             |
| Maximum Static Pressure       | 10 Bar                                                                                                        |
| Surface Mounted Only          |                                                                                                               |
| Approvals, Complies with      | BEAB, CE, BSI Kitemark                                                                                        |
| Guarantee                     | 2 years                                                                                                       |

#### Diagram Key:



Water Entry Points





Cable Entry Points

#### Dimensions:

H: 334mm

W: 225mm

D: 104mm

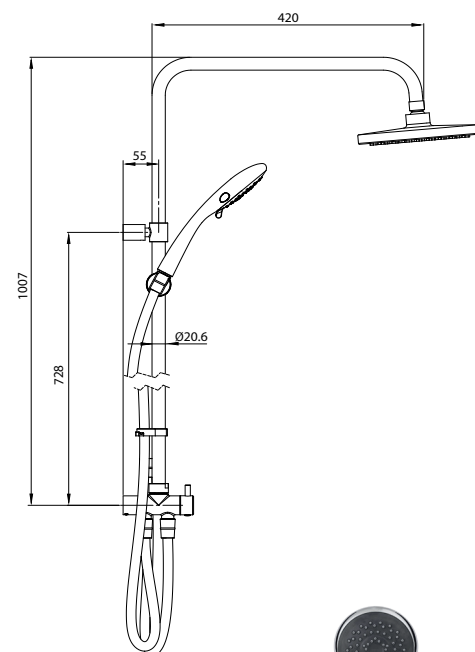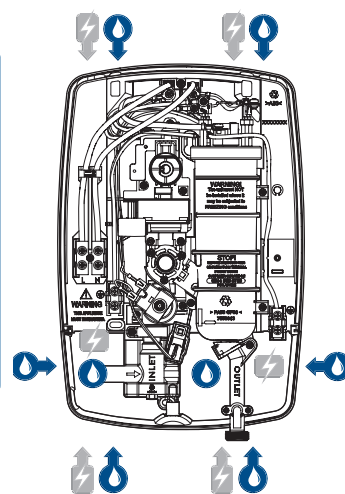

### DuElec™ Riser Rail Kit

|          |                                                        |
|----------|--------------------------------------------------------|
| Length   | 1007mm / 40inches                                      |
| Diameter | 20.5mm / 0.81 inches                                   |
| Material | Stainless Steel                                        |
| Finish   | Chrome                                                 |
| Hose     | 1.25m Anti-twist (main hose)<br>0.75m (Connector hose) |

### IMPORTANT MAINTENANCE NOTICE

Replacing specified Triton accessories for this T80Z Fast-Fit DuElec™ unit will aid optimum performance and maintain a valid guarantee



Isabel – Circular Fixed Shower Head  
Chrome  
TSHFISABCH



8000 Series Shower Head  
Chrome  
TSH8RCCHR



1.25m Anti-Twist Shower Hose  
Chrome  
TSHG1203

Contact our specification team

Call: 02476 324 776 | Email: [specification@tritonshowers.co.uk](mailto:specification@tritonshowers.co.uk) | Web: [www.tritonshowers.co.uk/specifiers](http://www.tritonshowers.co.uk/specifiers)