

Amore DuElec™

Electric Shower



Product Codes

Amore DuElec™ - 9.5kW - Gloss Black	GEAMDU93
-------------------------------------	----------

Installation

- Inlet connection: 15mm diameter
- Outlet connection: 1/2" BSP male thread

Commissioning

- Simple 2 minute commissioning process

End User

- Choice of showering experience - divert water between a 5 spray pattern shower head and luxurious fixed rainfall shower head, or even use both together
- Crisp white digital display with temperature read-out
- Sleek, contemporary cover
- Touch activated power selector, on/off button and temperature control dial
- 5 spray shower head with removable spray plate and 1.5m anti-twist hose
- 0.75m anti-twist diverter connector hose
- Suitable for cold mains only
- 2 years parts and labour guarantee
- Efficient A energy rating



Product Technical Sheet

Amore DuElec™

Electric Shower



Shower	
Temperature stability	Stabilised
Power ratings	9.5kW (at 240V)
Finish	Gloss Black
Controls	Start/stop button & temperature control dial
Visual indicators	Power-on/low pressure indicator
Inlet Connection	15mm male compression
Water Entry Points	Top, bottom, side bottom, back (left hand side unit) Bottom, side bottom, back (right hand side unit)
Cable Entry Points	Top, bottom, side bottom, back (left hand side unit)
Outlet Connection	½" BSP
Plumbing System Compatibility	Cold mains only
Minimum Running Pressure/Flow	1 Bar @ 8 l/min
Maximum Static Pressure	10 Bar
Surface Mounted Only	
Approvals, Complies with	BEAB, CE, BSI Kitemark, WRAS
Guarantee	2 years

*Recommended minimum running pressure/flow
for full performance 1 bar @8l/min

DuElec™ Riser Rail Kit	
Length	1007mm / 40inches
Diameter	20.5mm / 0.81 inches
Material	Stainless Steel
Finish	Satin Black
Hose	1.5m Anti-twist (main hose) 0.75m (Connector hose)

IMPORTANT MAINTENANCE NOTICE

Replacing specified Triton accessories for this Amore DuElec™ unit will aid optimum performance and maintain a valid guarantee

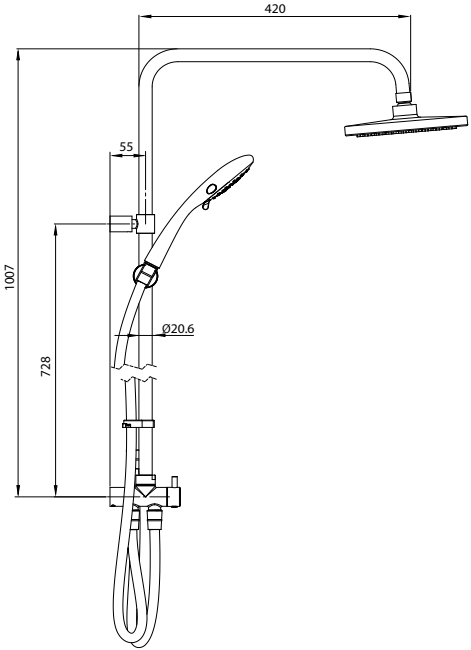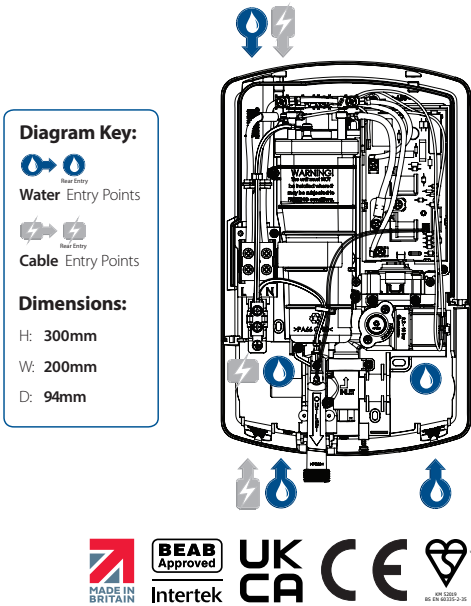

1.5m Anti-Twist Shower Hose
Matte Black
TSHG150BLK



8000 Series Shower Head
Matte Black
TSHE8RCBLK

Product Technical Sheet

Amore DuElec™

Electric Shower



Product Codes

Amore DuElec™ - 9.5kW - Gloss White	GEAMDU91
-------------------------------------	----------

Installation

- Inlet connection: 15mm diameter
- Outlet connection: 1/2" BSP male thread

Commissioning

- Simple 2 minute commissioning process

End User

- Choice of showering experience - divert water between a 5 spray pattern shower head and luxurious fixed rainfall shower head, or even use both together
- Crisp white digital display with temperature read-out
- Sleek, contemporary cover
- Touch activated power selector, on/off button and temperature control dial
- 5 spray shower head with removable spray plate and 1.5m anti-twist hose
- 0.75m anti-twist diverter connector hose
- Suitable for cold mains only
- 2 years parts and labour guarantee
- Efficient A energy rating



Amore DuElec™

Electric Shower

Shower

Temperature stability	Stabilised
Power ratings	9.5kW (at 240V)
Finish	Gloss White
Controls	Start/stop button & temperature control dial
Visual indicators	Power-on/low pressure indicator
Inlet Connection	15mm male compression
Water Entry Points	Top, bottom, side bottom, back (left hand side unit) Bottom, side bottom, back (right hand side unit)
Cable Entry Points	Top, bottom, side bottom, back (left hand side unit)
Outlet Connection	½" BSP
Plumbing System Compatibility	Cold mains only
Minimum Running Pressure/Flow	1 Bar @ 8 l/min
Maximum Static Pressure	10 Bar
Surface Mounted Only	
Approvals, Complies with	BEAB, CE, BSI Kitemark, WRAS
Guarantee	2 years



*Recommended minimum running pressure/flow
for full performance 1 bar @8l/min

DuElec™ Riser Rail Kit

Length	1007mm / 40inches
Diameter	20.5mm / 0.81 inches
Material	Stainless Steel
Finish	Chrome
Hose	1.5m Anti-twist (main hose) 0.75m (Connector hose)

IMPORTANT MAINTENANCE NOTICE

Replacing specified Triton accessories for this Amore DuElec™ unit will aid optimum performance and maintain a valid guarantee

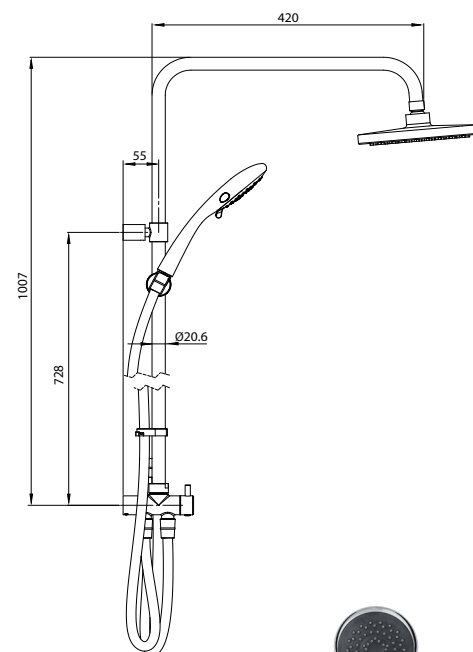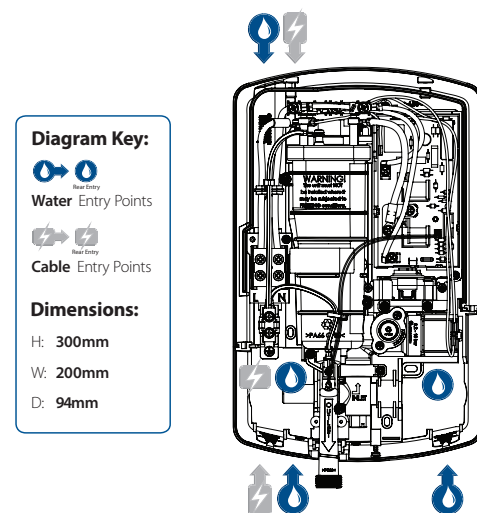

Isabel – Circular Fixed Shower Head
Chrome
TSHFISABCH



8000 Series Shower Head
Chrome
TSH8RCCHR



1.5m Anti-Twist Shower Hose
Chrome
REHOSE150C

Contact our specification team

Call: 02476 324 776 | Email: specification@tritonshowers.co.uk | Web: www.tritonshowers/specifiers.co.uk