

AS2000SR DuElec®

Thermostatic Power Shower

Product Codes

AS2000SR DuElec® - Thermostatic Power Shower	White	GP2SRDU1
AS2000SR DuElec® - Thermostatic Power Shower	Black	GP2SRDU3

Installation

- Inlet connection: 15mm diameter
- Outlet connection: 1/2" BSP male thread

Commissioning

- Simple 2 minute commissioning process

End User

- Choice of showering experience - divert water between a 5 spray pattern shower head and luxurious fixed rainfall shower head, or even use both together
- Quiet mark awarded pumped motor technology
- Multiple cable and water entry points including the Triton Swivel Fit Water Inlet, enabling top, rear or bottom entry for ease of installation
- Thermostatic control constantly regulates the temperature providing you with precise control and a safer showering experience
- Footprint makes it an ideal replacement for existing Triton power shower models
- Start/Stop push button
- Adjustable maximum temperature stop - Reduces the risk of accidentally turning the temperature too high
- 5 spray shower head with removable spray plate and 1.5m anti-twist hose and a 0.75m anti-twist diverter connector hose
- Automatic Shutdown – should either the hot or cold water supplies fail
- Suitable for low pressure gravity fed systems only
- 1 year parts and labour guarantee



White
(Chrome Kit)



Black
(Black Kit)



AS2000SR DuElec®

Thermostatic Power Shower

Shower

Temperature stability	Thermostatic
Voltage 230/240V Ac.	Rating 53W nominal
Controls	Top control - flow & bottom control - temperature
Visual indicators	Graphics only
Inlet Connection	15mm push fit
Water Entry Points	Rising, falling, back
Outlet Connection	½" BSP male thread
Plumbing System Compatibility	Low pressure gravity
Minimum Head Height	75mm
Maximum Head Height	10m
Maximum Open Outlet Flow Rate	14l/min
Surface Mounted Only	
Approvals, Complies with	BEAB, CE, UKCA, Quiet Mark
Guarantee	1 year



*Recommended minimum running pressure/flow
for full performance 1 bar @8l/min

DuElec® Riser Rail Kit

Length	1007mm / 40inches
Diameter	20.5mm / 0.81 inches
Material	Stainless Steel
Finish	Chrome or Black
Hose	1.5m Anti-twist (main hose) 0.75m (Connector hose)

IMPORTANT MAINTENANCE NOTICE

Replacing specified Triton accessories for this AS2000SR DuElec® unit will aid optimum performance and maintain a valid guarantee

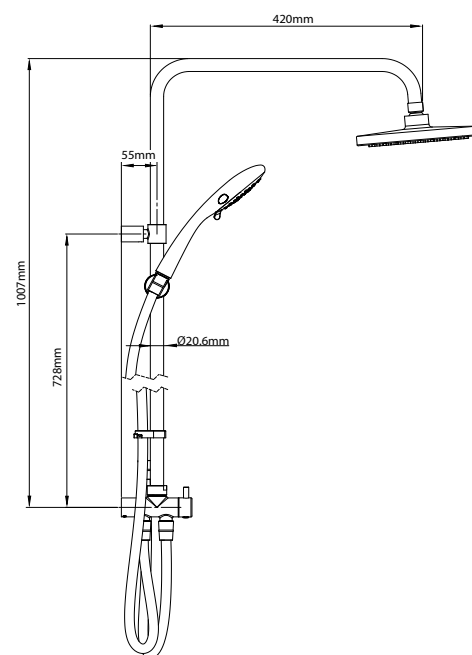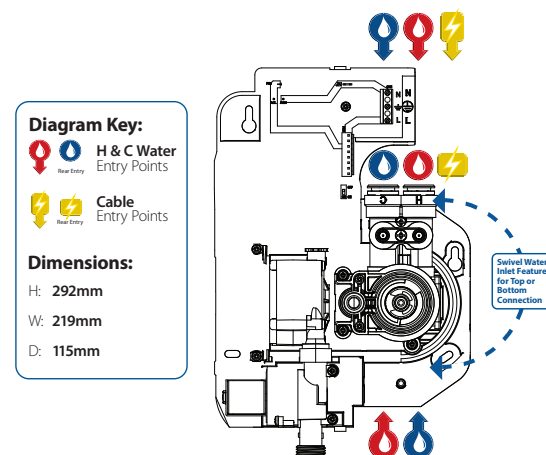

1.5m Anti-Twist Shower Hose
Chrome
REHOSE150C



Isabel Fixed Shower Head
Chrome with White Face Plate



8000 Series Shower Head
Chrome with White Face Plate



1.5m Anti-Twist Shower Hose
Matte Black
TSHG150BLK



Isabel Fixed Shower Head
Black
TSHFISA13



8000 Series Shower Head
Matte Black
TSH8RCBLK

Contact our specification team

Call: 02476 324 776 | Email: specification@tritonshowers.co.uk | Web: www.tritonshowers.co.uk/specifiers