

Aspirante DuElec®

Electric Shower



Product Codes

Aspirante DuElec® - 9.5kW - Matte Black (Black Kit)	GEASDU93
Aspirante DuElec® - 9.5kW - Gloss Black (Chrome Kit)	GEASGD93
Aspirante DuElec® - 9.5kW - Gloss White (Chrome Kit)	GEASDU91
Aspirante DuElec® - 9.5kW - Gun Metal (Chrome Kit)	GEASDU94
Aspirante DuElec® - 9.5kW - Brushed Steel (Chrome Kit)	GEASDU96

Installation

- Inlet connection: 15mm diameter
- Outlet connection: 1/2" BSP male thread

Commissioning

- Simple 2 minute commissioning process

End User

- Choice of showering experience - divert water between a 5 spray pattern shower head and luxurious fixed rainfall shower head, or even use both together
- Select from five finishes - Matte Black, Gloss Black, Gloss White, Gun Metal and Brushed Steel
- Easy to use - Illuminated soft touch power buttons
- Phased shutdown - Flushes out preheated water after use to help reduce limescale build up
- 5 spray shower head with removable spray plate and 1.5m (Black) 1.25m (Chrome) anti-twist hose and a 0.75m anti-twist diverter connector hose
- Suitable for cold mains only
- 2 year parts and labour guarantee
- Efficient A energy rating

Brushed Steel Effect



Matte Black
(Black Kit)

Gloss Black
(Chrome Kit)

Gloss White
(Chrome Kit)

Gun Metal
(Chrome Kit)

Brushed Steel
(Chrome Kit)



Product Technical Sheet

Aspirante DuElec®

Electric Shower

Shower

Temperature stability	Stabilised
Power ratings	9.5kW (240V)
Finish	Matte Black, Gloss Black, Gloss White, Gun Metal & Brushed Steel
Controls	Start/stop button & temperature control dial
Visual indicators	Power-on/low pressure indicator
Inlet Connection	15mm male compression
Water Entry Points	Left Hand Side - Top, Bottom, Back Right Hand Side - Bottom, Back
Cable Entry Points	Left Hand Side - Top, Bottom, Back, Side
Outlet Connection	½" BSP
Plumbing System Compatibility	Cold mains only
Minimum Running Pressure/Flow	1 Bar @ 8 l/min
Maximum Static Pressure	10 Bar
Approvals, Complies with	BEAB, CE, UKCA, BSI Kitemark, IPX4
Guarantee	2 years



*Recommended minimum running pressure/flow for full performance 1 bar @8l/min

DuElec® Riser Rail Kit

Length	1007mm / 40inches
Diameter	20.5mm / 0.81 inches
Material	Stainless Steel
Finish	Chrome or Black
Hose	Black - 1.5m Anti-twist (main hose) Chrome - 1.25m Anti-twist (main hose) 0.75m (Connector hose)

IMPORTANT MAINTENANCE NOTICE

Replacing specified Triton accessories for this Aspirante DuElec® unit will aid optimum performance and maintain a valid guarantee

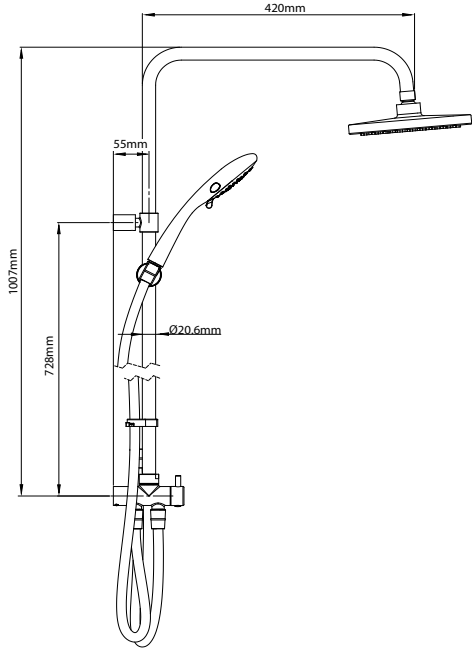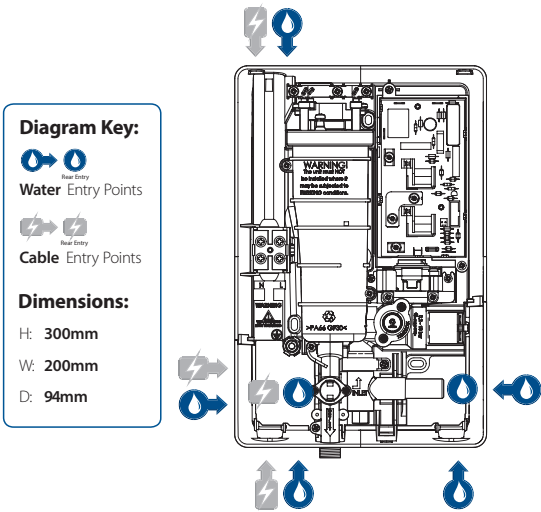

Contact our specification team
Call: 02476 324 776 | Email: specification@tritonshowers.co.uk | Web: www.tritonshowers.co.uk/specifiers