

T80Z Thermostatic Fast-Fit Shower

The shower that combines the benefits of the original T80Z Thermostatic with the market leading installation benefits of the T80Z Fast-Fit.

Plus Triton introduces new Dura-Flow™ technology for showers that last longer

The T80Z Thermostatic Fast-Fit - ideal for all, whether an installer, specifier or the end-user.



Fast

Retro -fit	Generous footprint will cover the original T80Z Thermostatic as well as most competitor models
Entry points	8 water and 6 cable entry points make the new T80Z Thermostatic Fast Fit
Dual water inlet	For easy pipe connection either left or right
Separate trims	Entry trims can easily be removed and fitted without tools allowing a cleaner finish
Adjustable riser rail	Upper fixing bracket can be adjusted to cover any existing screw holes
Commissioning	Takes just 2 minutes

Peace of mind

Thermostatic	Constantly regulates temperature to give the user more precise and safer showering
Tried & tested	Uses mixer wax capsule technology, no PCB required
Dura-Flow™	Reduces the build up of limescale by up to 80%. Ideal for use in hard water areas
Product Guarantee	Backed by Triton's 2 year full parts and labour guarantee
After sales	Supported by Triton's national team of engineers should you need them
Contemporary design	Stylish front plate that your clients or customers will love

Durable

Heater	Triton's newly designed Dura-Flow™ heater technology helps to reduce the build up of limescale by up to 80%, extending the life of the shower
Showerhead	A large diameter, 5 position Dura-Flow™ showerhead that is easy to clean, with rub-clean nozzles and removable sprayplate
Filters	A Dura-Flow™ debris filter is fitted in each water inlet. Both filters are removable for cleaning without disconnecting the inlet pipe

NEW HEATER CAN TECHNOLOGY

Up to 80% less scale build up! Extending the lifetime of the shower

DESIGNED &
BUILT IN
BRITAIN

NEXT DAY
DELIVERY

EASY TO
INSTALL

FIT AND
FORGET

FULL PARTS
& LABOUR
GUARANTEED

TRUSTED
TRITON
SERVICE

For more information call +44 (0) 844 980 0750

www.tritonshowers.co.uk



YouTube

T80Z Thermostatic Fast-Fit Shower

Shower unit


Temperature stability	Thermostatic +/-2°C
Power ratings	8.5kW, 9.5kW & 10.5kW
Finish	White with chrome flashes
Control(s)	Separate temperature and flow controls
Visual indicators	Low flow illumination & dial markings
Dual water connection	15mm wide compression
Swingfit™ terminal block	16mm max cable
Water supply	Mains cold water
Water pressure min	1bar (running at 8 l/min)*
Water pressure max	10 bar (static)
Removable pipe/cable trims	Top & bottom (15mm pipework & 38mm cable trunking)
Other installation aid(s)	Wall mounting template

*10.5kW: 1.5 bar (running at 11 l/min)



Showerhead & Hose

Showerhead diameter	110mm
Spray options	5 patterns
Cleaning	Rub clean nozzles & removable spray plate
Hose length	1.25m

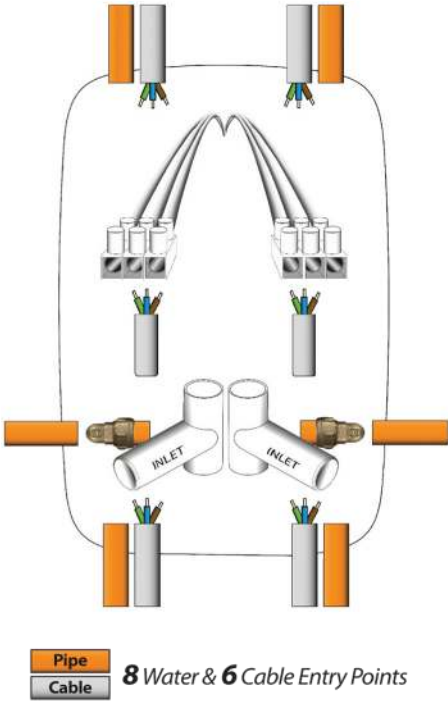

Product codes	
T80z Thermostatic Fast-Fit 8.5kW	SP8008ZFFTHM
T80z Thermostatic Fast-Fit 9.5kW	SP8009ZFFTHM
T80z Thermostatic Fast-Fit 10.5kW	SP8001ZFFTHM