


Twyford Sola washbasin tap, wall-mounted, mains operation

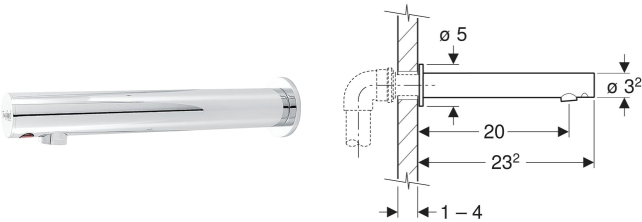

APPLICATION PURPOSES

- For public and semipublic areas
- For panelling thickness 10–40 mm

CHARACTERISTICS

- Automatic flush actuation
- Infrared user detection
- Power supply via power supply unit or battery
- Volume flow control via tap aerator
- Wall mounting with one connection
- With collar
- Without interval flush

TECHNICAL DATA

Nominal voltage	230 V AC
Operating voltage	6 V DC
Operating pressure	0.5–5 bar
Test pressure, water max.	8 bar
Test pressure, air / inert gas max.	3 bar
Ambient temperature	1–40 °C
Storage temperature	5–70 °C
Operating temperature, water max.	60 °C
Flow rate at 3 bar	3.8 l/min

Minimum flow pressure	0.5 bar
Calculated flow rate	0.06 l/s
Product material	Brass / plastic

SCOPE OF DELIVERY

- Battery
- Power supply unit

TO ORDER ADDITIONALLY

- Thermostatic mixer

Art. no.	Colour / surface	Mixer	L cm	B cm	H cm	Power consumption W
SF1249CP	chrom / glossy	without mixer	23.2	5	5	0.1