



User instructions for System 200 Whirlpool (WP200)

1.

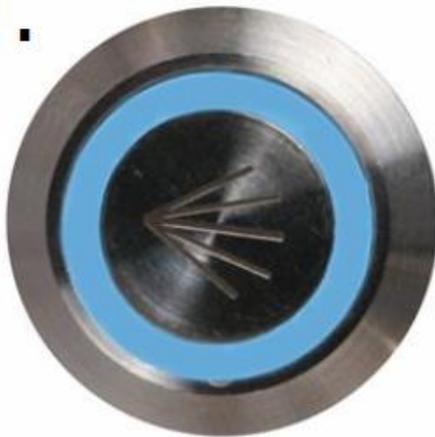

2.

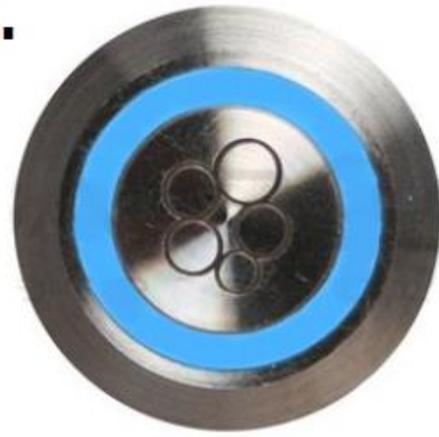

Press the pump control (button 1) to activate the whirlpool system. The blue ring around the control will illuminate. Press again to switch the system off. This function will only operate if there is enough water in the bath (pump protection) and has a 30 minute timeout.

While the pump is running press the blower control (button 2). To activate the blower which injects air in to the water stream (supercharge). The blue ring around the control will illuminate. Press again to switch the blower off. This function should only be activated when the pump (button 1) is activated and has a 30 minute time out.

Approximately 20 minutes after the bath has drained below the jets the blower will switch on automatically sending air through the pipework (hygiene management) for approximately 2 minutes. The blue ring around the blower control (button 2) will flash during this process.

Cleaning & Maintenance

The jets and controls should be cleaned with a soft sponge or cloth; never use an abrasive cleaner.

The whirlpool pump and pipework are self draining; however it is a requirement that the system is cleansed regularly. A system cleaner can be purchased from a variety of suppliers.

Check out our full range of Bathroom Suites

Bathroom Suites By Range

Cloakroom Suites

Toilets

Bathroom Sinks / Wash Basins

Bidets

Baths

Wide variety of toilets

Close Coupled Toilets

Wall Hung Toilets

Back To Wall Toilets

Furniture unit toilets

Huge Selection of Baths

Acrylic Baths

Steel Baths

Shower baths

Freestanding baths

Small baths

Corner baths

Whirlpool baths

Don't forget the important bathroom suite extras

Bath panels

Toilet seats

plumbworld
Big brands, small prices.