


SCAN to watch the video

SHOWER WASTE





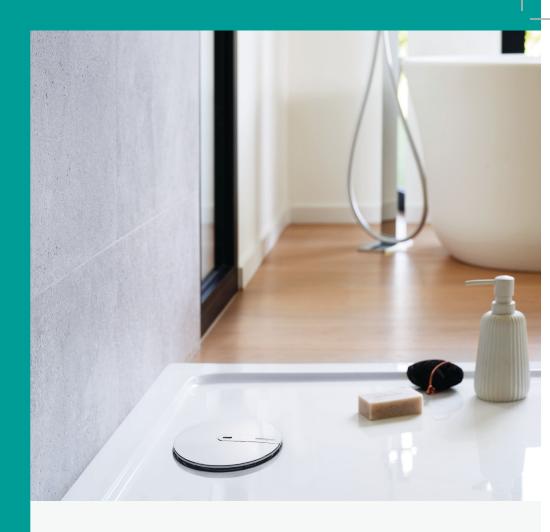

Because our customers have the right to be EXTRA DEMANDING, Wirquin launches **SLIM**[†] the extra-flat shower waste and introduces the **SMART Membrane** Technology.

Quick and easy to install in all configurations, extra reliable without any risk of leaks and easy to clean, SLIM + is guaranteed to meet all the installers and end-users expectations.

The extra-flat shower waste!

- > Extra compact
- > Extra clean
- > Extra reliable



















SHOWER WASTE



BENEFITS



EXTRA COMPACT

Quick to install with shallow depth. Thanks to its small footprint **SLIM**¹ is ideal for low profile shower trays.



SLIM

The guarantee of a

installation in all

shower trays.

quick, easy and reliable

configurations of D90





ANTI-ODOUR

No more bad smells - Cartridge with silicone membrane: a perfect barrier against bad smells.







The silicone membrane lets the water through and blocks bad smells.

Bi-injected washer



NO LEAKS

Bi-injected washer under the tray for a reliable installation guaranteed 100% leak-proof.







EASY TO CLEAN

Easy cleaning from above : Independent hair catcher to adapt to the frequency of everyone's cleaning habits.

Removable cartridge for deeper cleaning and direct access to the pipework.



Removable hair catcher



Removable cartridge





SMART Membrane Technology

- > Cartridge is equipped with silicone membrane which opens when water passes and closes automatically afterwards, ensuring optimal drainage. Its external bi-injected washer guarantees a perfect seal. No more bad smells, no more pipe noises, no more back-siphoning.
- > The independent hair catcher is removable from above, without removing the cartridge for quick and easy cleaning.
- > Removable cartridge for deeper cleaning and direct access to the pipework.
- > No more chemical product needed to clean your shower waste!





Prevents odours.



Eliminates noise in the pipes.



Creates natural ventilation in the pipes and prevents backsiphoning.

RELIABLE INSTALLATION





SCAN to see instructions

D40UK compression and/or solvent weld outlet



Very efficient flow rate: better than standard requirements (flow rates can vary depending of the finish).

> WARNING: Don't use silicone sealant.

CHARACTERISTICS

PP nut

D118 mm Chrome plated ABS dome (a) D118 mm Brushed Nickel dome D113 mm Brushed stainless steel grid **(b)** PP cartridge with silicone membrane **(c)** PP hair catcher **(d)** Stainless steel screws (e) Stainless steel fixing plate (f)Brass inserts (g) Bi-injected washer (**h**) ABS body (i) EPDM washer (j)PP ring

