

COBALT SHWR PK2

COBALT Shower Range Cobalt Shower Pack 2 Complete




Features:

- Enjoy peace of mind with a 42°C safety stop, including override when required
- Shower safely with automatic shut-off protection if hot or cold water supply fails
- Enjoy a powerful, like-new shower every day—rub-clean nozzles on the drench head and handset make it easy to keep performance at its peak.
- Supplied with everything you need, including shower valve with integral two outlet diverter, slimline 200mm square drench head with shower arm, plus a rub-clean single function handset and wall outlet
- Easy installation with an adjustable faceplate that fits total wall depths from 60mm to 75mm for a perfect flush finish

Product Certifications:




For more products, visit our website:
<http://www.bristan.com>



Specification

Finish/Colour:	Chrome Plated
Main Construction Material:	Brass; ABS
No of Controls:	3
Shower Type:	Dual Control
Shower Head Type:	Both
Shower Kit:	Fixed Head
Valve/Cartridge Type:	3/4" Ceramic Disc Valve 1/4 turn
Maximum Hot Water Supply Temperature °C:	65
Plumbing System Suitability:	Suitable for all plumbing systems
Minimum Dynamic Pressure (bar):	0.2
Maximum Dynamic Pressure (bar):	5
Maximum Static Pressure (bar):	10
Connection Inlet:	15mm Compression
Connection Outlet:	G 1/2"
Isolation Valve Included:	No
Check Valve Included:	Yes

Dimensions (measurements in mm)

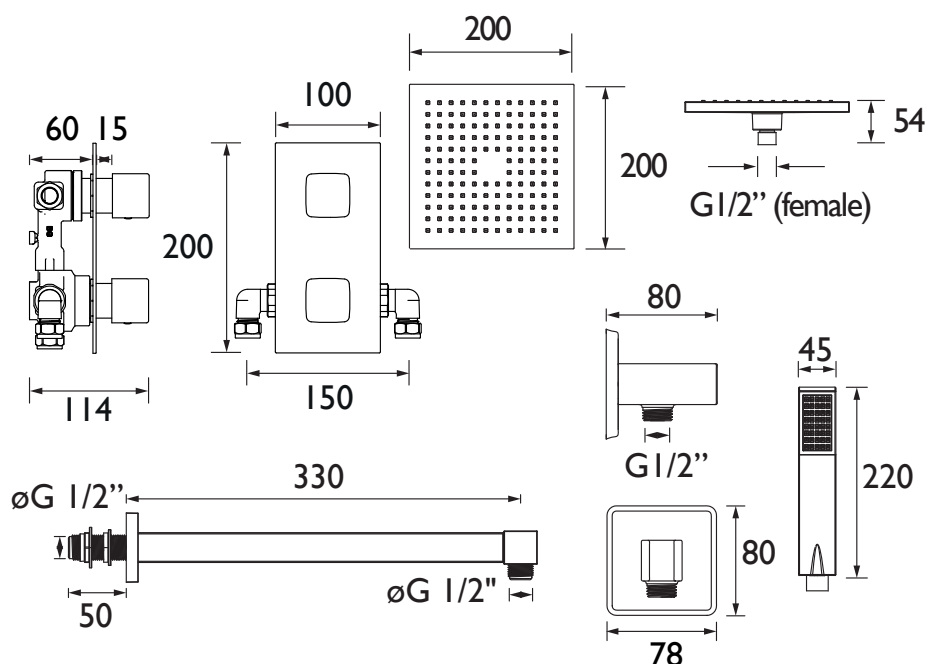

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Through Handset (mixed)	2.1	3.3	4.7	6.6	8.1	10.5
Through Fixed Head (mixed)	2.2	3.5	5	7	8.6	11.1

TECHNICAL
DATA
SHEET



BRISTAN

D5