

Affresco Discreet Wall Fans (100, 125 & 150mm)



- Basic or Timer controls options
- Easy to install
- Suitable for bathroom zones 1, 2 & 3
- Low profile

Accessories


ED1/ED150

Easyfix ducting plastic wall liner with integral screw-fixing channels.



FF100

Fast fix wall duct system. Comprises 100mm PVC duct with external wall duct seal and external grille. Available in white or brown.



EG1/EG2

Fixed blade louvred grille in semi-matt ABS plastic. Available in white or brown.




Physical Specifications

Weight:

- 100mm – 0.7kg
- 125mm – 0.61kg
- 150mm – 1.05kg


Material: ABS plastic

Dimensions

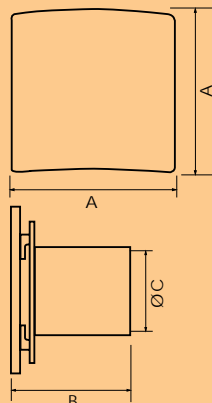

	100mm	125mm	150mm
A	150	180	220
B	135	150	160
C	98	115	150

Performance Graph

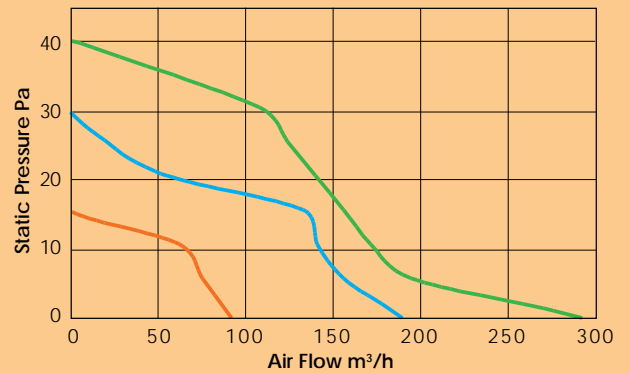

100mm Range — 125mm Range — 150mm Range —

Electrical Specifications

230V~50Hz Class II

Consumption: 100mm Fan – 13W
125mm Fan – 20W
150mm Fan – 22W

Cabling: 1.5mm² max.

Data Table

	Performance to BS 848 Pt1 in free air		Sound Pressure level @ 3m		IP Rating	Operation	Features
	m ³ /h ¹	l/s ¹	dB(A)	level			
D100BW	90	25	33	24	24	Single speed	100mm induct wall fan with plain white front cover
D100TW	90	25	33	24	24	Single speed	100mm induct wall fan with timer and plain white front cover
D125BW	185	51	39	24	24	Single speed	125mm induct wall fan with plain white front cover
D125TW	185	51	39	24	24	Single speed	125mm induct wall fan with timer and plain white front cover
D150BW	280	78	40	24	24	Single speed	150mm induct wall fan with plain white front cover
D150TW	280	78	40	24	24	Single speed	150mm induct wall fan with timer and plain white front cover

plumbworld
Big brands, small prices.

Pdf Supplied By <http://www.plumbworld.co.uk/>